


# EDCON-COMPONENTS




## Technical Discription

**Material:** PA66, Brass, Silicone  
**Certification:** ROHS / cUL/TÜV/SAA/CE  
**Fire-Prof:** UL94-V2  
  
**Maximum Current:** 24A / 400V  
**Test Voltage:** 2500V  
**Suitable for Cables Cross:** 0,5 ~ 2,5mm<sup>2</sup>  
**Operating Temp. Range:** -40°C to + 105°C  
**Protection Degree:** IP68

## Drawing (mm)

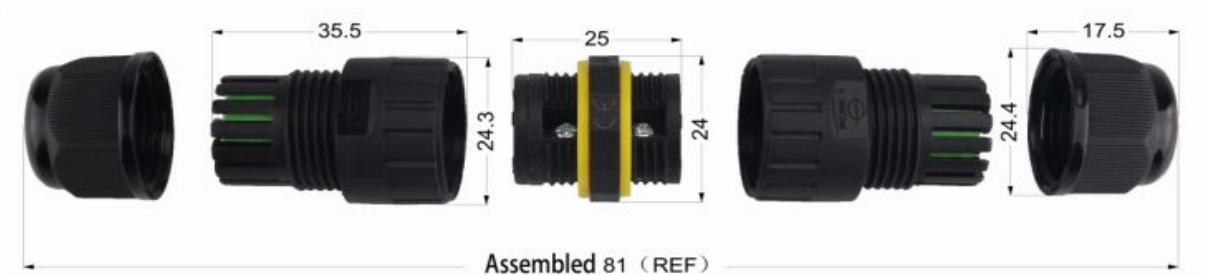

Silicone parts



∅ A	Wire OD
∅11.5	∅9-12mm
∅8.5	∅5-9mm

**M20 Waterproof Coupler  
3Pos.**

Part No.: **T95008**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	03.11.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 2

[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)

# EDCON-COMPONENTS



## Ordering Informations

Serie	Number of Pos.	Body Colour	Wire Diameter	Special Function	ROHS	Packing
-------	----------------	-------------	---------------	------------------	------	---------

T95008	3	BK	A	N	R	BU
--------	---	----	---	---	---	----

3= 3Pos.	BK= Black	A=9~12mm	N= No special function	R= ROHS Conform	BU= Bulk-Ware
		B=5~9mm		N= NON ROHS Conform	IV= Individual Package

**M20 Waterproof Coupler  
3Pos.**

Part No.: **T95008**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	03.11.2022	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 2		