


EDCON-COMPONENTS



Technical Discription

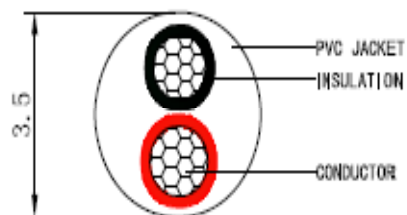


PIN ASSIGNMENT

	P1	P2
RED	1	vBUS
WHITE	4	GND

CABLE

Drawing

4	CONN	USB Type-C M PIN:G/F SHELL NI PLATED BLACK INSULATOR 铆压式 (2.0版两PIN下拉5.1K电阻充电式)	1PCS
3	OVERMOLD	PVC COLOR: WHITE 料号:JL-WH1205B 55P	16 g
2	CONN	USB A MALE PIN:G/F NI PLATED WHITE INSULATION 短体式	1PCS
1	CABLE	UL2464 24AWG*2C OD=3.5±0.1mm PVC JACKET COLOR:WHITE 光面, 标准印字 L=1200±15mm	1PCS
NO.	MAT. NAME	DESCRIPTION	Q`TY

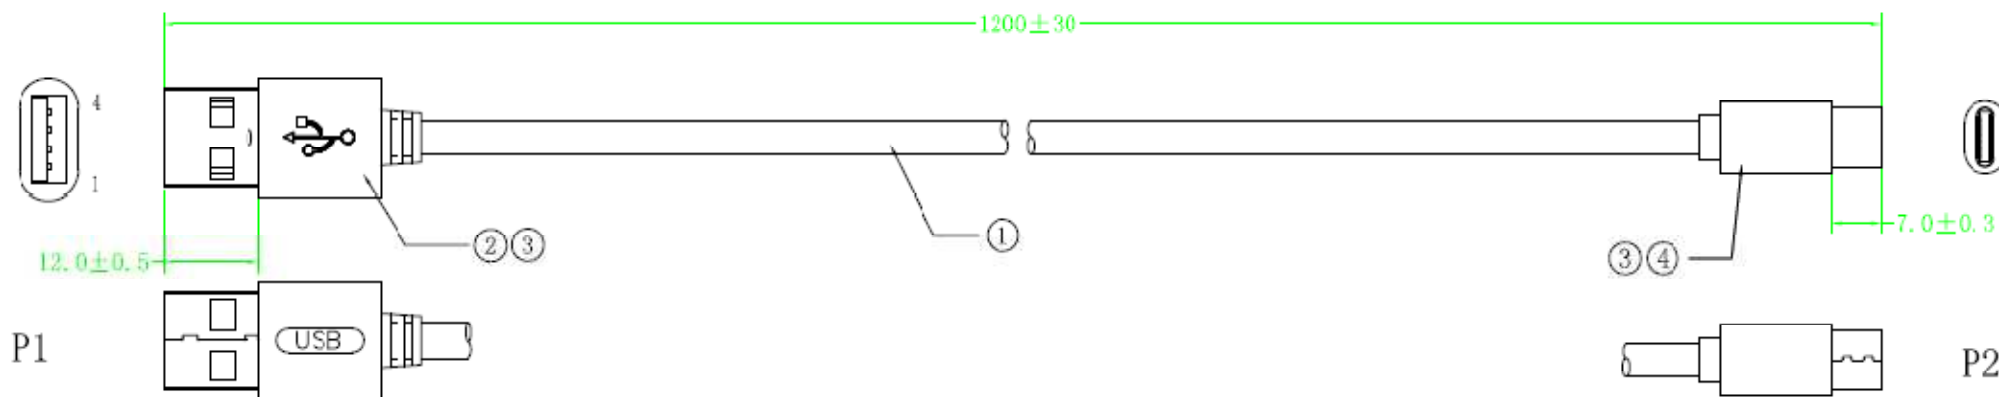

USB-Cable USB-A to Type C Male Connector

Part No.:
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.06.2012
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 2	

EDCON-COMPONENTS



Ordering Informations


Terminal

Serie	Length of Cable	Color of Cable	No function	No function	ROHS	Packing
TA20019	xxxx	LG	X	X	R	BU
	xxxx= steht für die Länge in mm	LG= Light Grey BK= Black GY= Grey WH= White	X= No function	X= No function	R= ROHS Conform N= NON ROHS Conform	BU= Bulk Ware PB= Polybag BL= Bundle Packing

NOTES:

- 1: ANY OPEN OR MISWIRE SHORT OR INTERMITTENCE ARE NOT PERMITTED.
- 2: ALL MATERIAL MUST BE "RoHS" COMPLIANT .
- 3: TEST CONDITION :
 TEST VOLTAGE: DC 300V/0.01S
 INSULATION RESISTANCE: 3M ohm(MIN)
 CONDUCTION RESISTANCE: 3 ohm(MAX)

PACKING METHOD
 LIKE LETTER "8"
 WITH WHITE TIE PACK

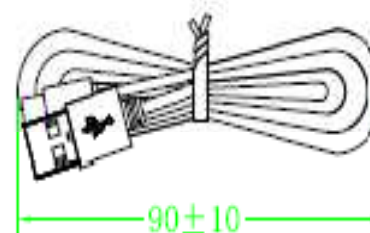

USB-Cable USB-A to Type C Male Connector

Part No.: **TA20019**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.06.2012
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 2

Customer: