



DATA SHEET

Piezoelectric Buzzer

Serie: Y18008

Piezoelectric Buzzer	
Serie No.:	Y18008
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	15.04.2013
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 14

EDCON-COMPONENTS



Specifications

Rated Voltage:	12	VDC
Operating Voltage:	3~28	VDC
Rated Current max.:	8	mA
Sound Output min.:@ 30cm	83	dB
Sound Output max.:@ 30cm		dB
Resonat Frequency:	3,0 +/-0,5	KHZ
Operating Temperature:	-.30~ +85	°C
Storage Temperature:	-.40~ +95	°C
Dimensions:	look drawing	mm
Weight:	3,8	g
Material:		
Housing:	ABS	

Piezoelectric Buzzer


Part No.: **Y18008**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	15.04.2013	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	x from x		

EDCON-COMPONENTS



Drawing

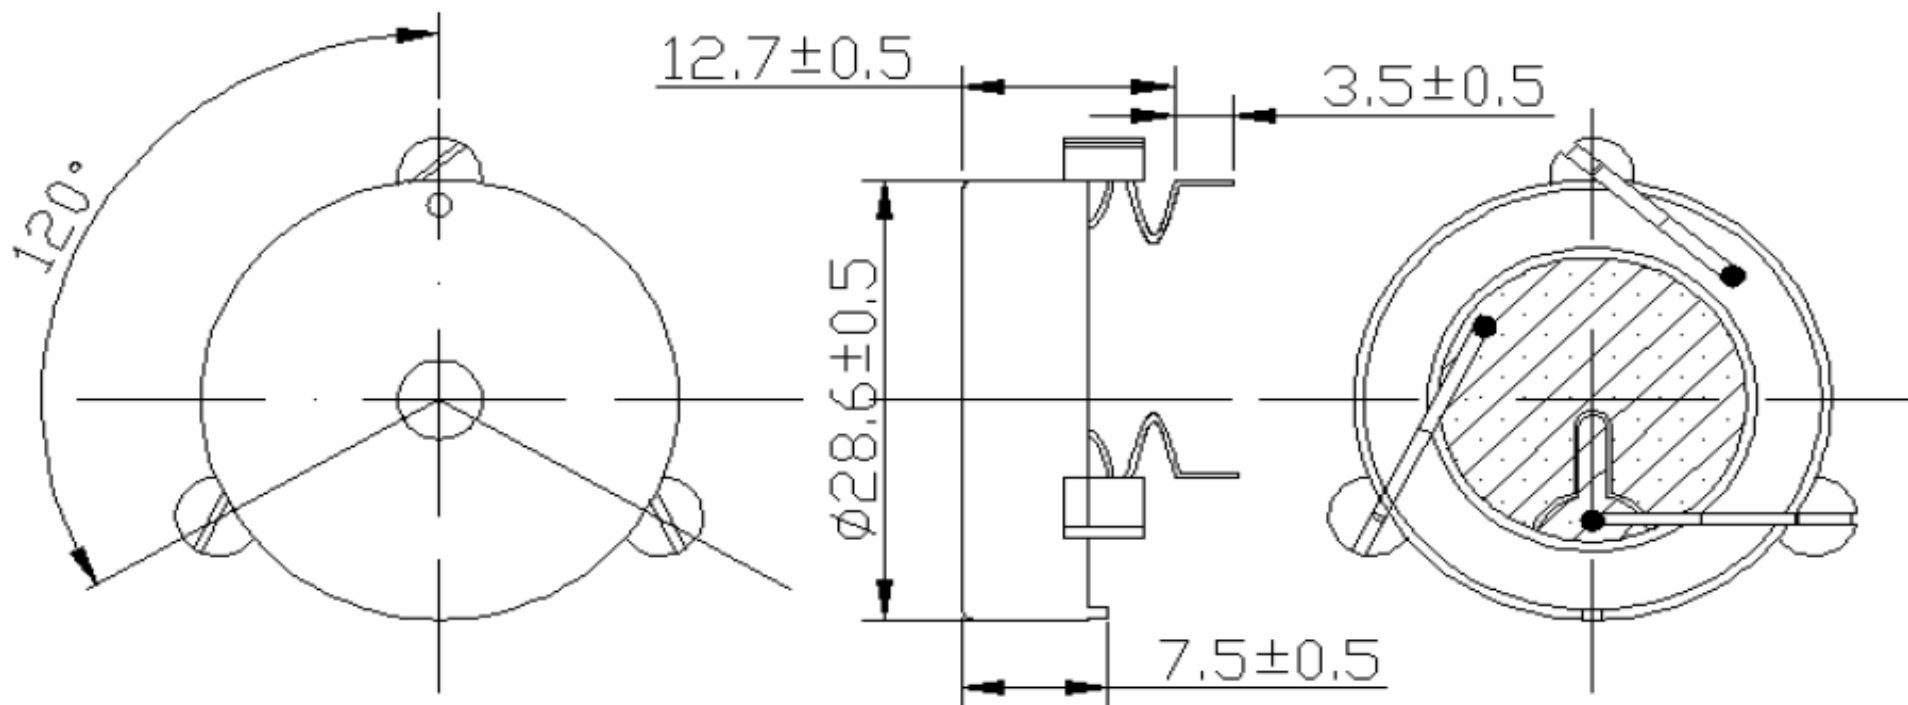

Piezoelectric Buzzer	
Part No.:	Y18008
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	15.04.2013
APPD:	Schumi			FINISH	Jamy		Sheet No.		x from x

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	Frequency	Special function	Voltage	Special function	ROHS	Packing Code				
-------	-----------	------------------	---------	------------------	------	--------------	--	--	--	--

Y18008	3.0	N	12	N	R	TY				
--------	-----	---	----	---	---	----	--	--	--	--

3,0= KHZ	0= no special function	12= Rated	0= no special function	R= ROHS Conform N= NON ROHS Conform	BU= Bulk Ware TY= TRAY Packing IV= Individual Packing
----------	------------------------	-----------	------------------------	--	---

Piezoelectric Buzzer

Part No.: **Y18008**


Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	15.04.2013
APPD:	Schumi			FINISH	Jamy			Sheet No.	x from x



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

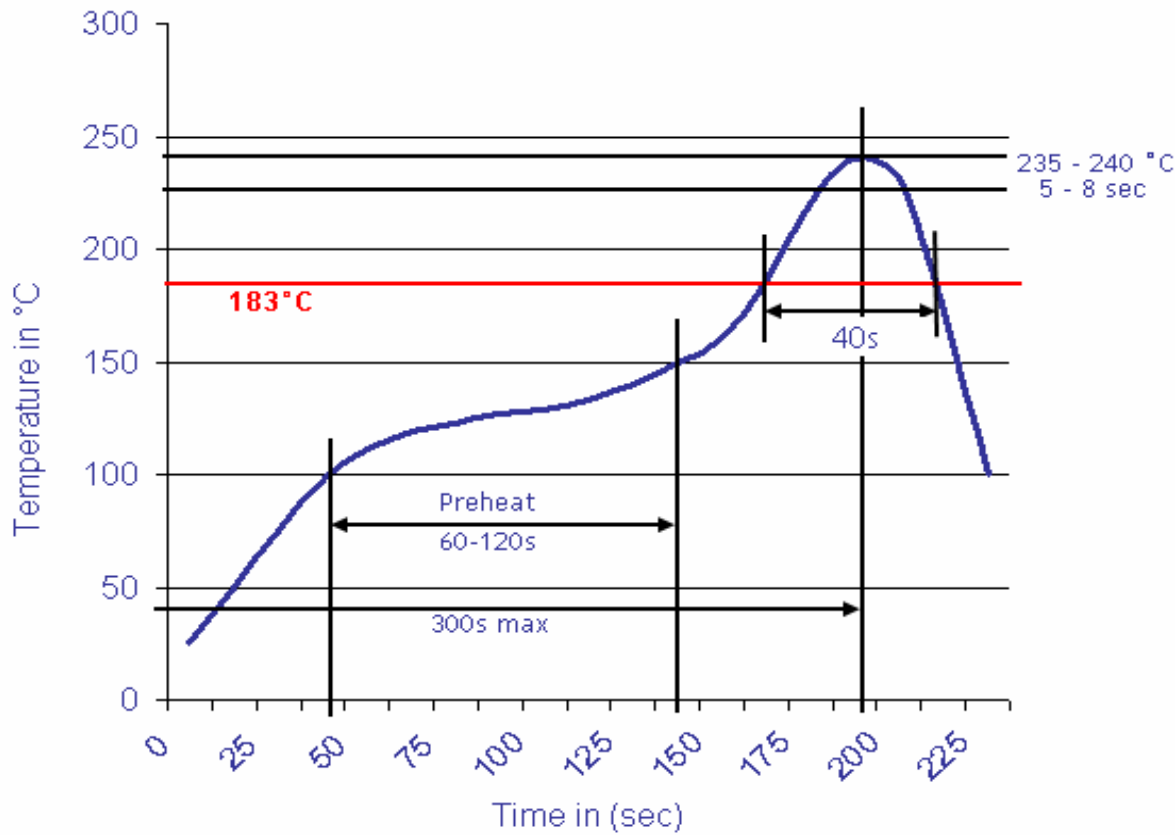

Piezoelectric Buzzer	
Part No.:	Y18008
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	15.04.2013
APPD:	Schumi			FINISH	Jamy		Sheet No.	x from x	

