



EDCON-COMPONENTS

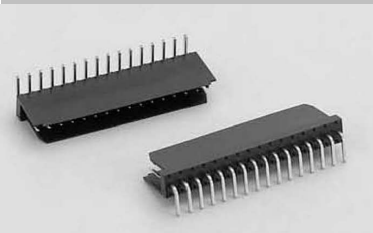

Technical Discription


Insulator: PBT, glass reinforced rated UL94V-0
 Contact Material: Brass
 Current Rating: 2A
 Contact Reistance: 30mΩ max.
 Insulation Resistance: 3000MΩ min.
 Dielectric Withstandng Voltage: 500VAC for 1 Minute
 Operating Temperature: -40°C to + 105°C

Drawing

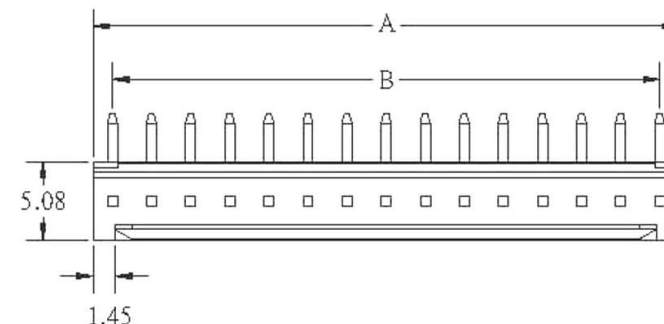


Specifications

No. of Pos.	A (mm)	B (mm)	No. of Pos.	A (mm)	B (mm)
2	5,08	2,43	20	50,80	48,26
3	7,62	5,08	21	53,34	50,80
4	10,16	7,62	22	55,88	53,34
5	12,70	10,16	23	58,42	55,88
6	15,24	12,70	24	60,96	58,42
7	17,78	15,24			
8	20,32	17,78			
9	22,80	20,32			
10	25,40	22,80			
11	27,94	25,40			
12	30,48	27,94			
13	33,02	30,48			
14	35,56	33,02			
15	38,10	35,56			
16	40,64	38,10			
17	43,18	40,64			
18	45,72	43,18			
19	48,26	45,72			

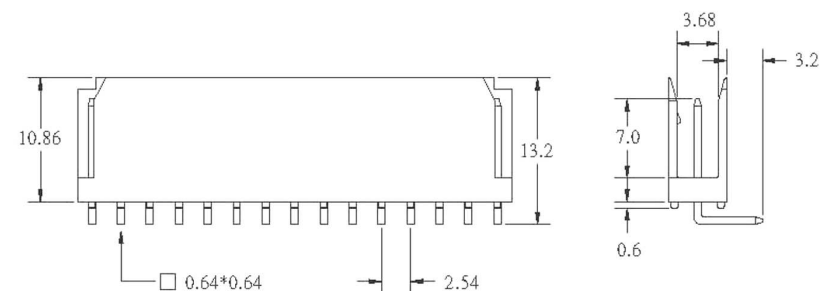


PCB Layout



Two Wall Pin Header Single Row Right Angle	
Part No.:	T68N050
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.07.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 3

EDCON-COMPONENTS

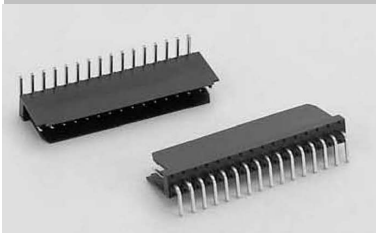

Ordering Informations


Serie	No. Of Position	Contact Plating	Color of Body	ROHS	Packing					
-------	-----------------	-----------------	---------------	------	---------	--	--	--	--	--

T68N050	02	GF	BK	R	BU					
----------------	-----------	-----------	-----------	----------	-----------	--	--	--	--	--

02= 2Pos.	GF= Gold Flash	BK= Black	R= ROHS Conform	BU= Bulk-Ware
	TN= tinned			


Two Wall Pin Header Single Row Right Angle	
Part No.:	T68N050
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.07.2010
APPD:	Schumi			FINISH	Jamy			Sheet No.	2 from 3

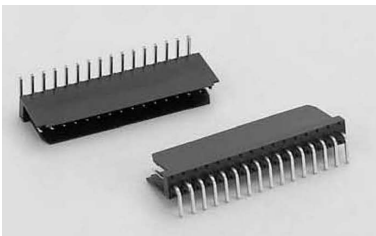

Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

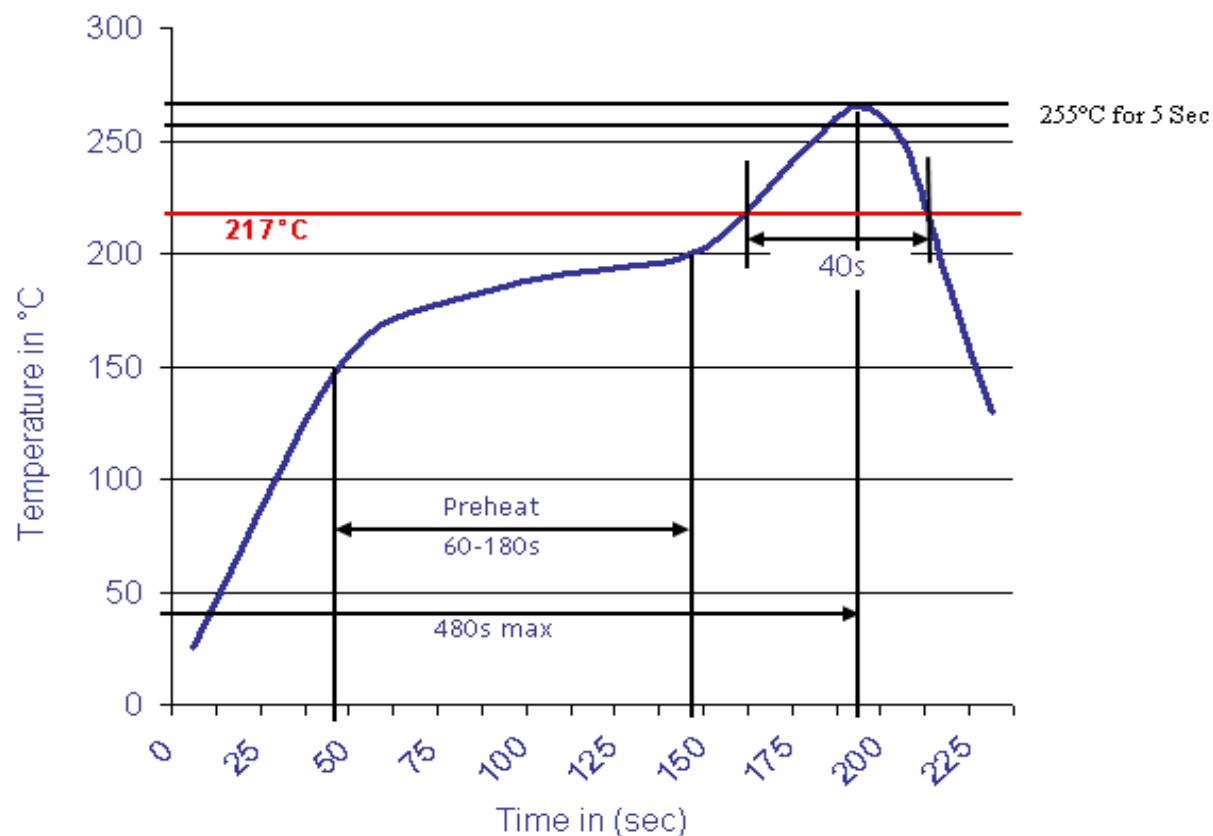

Two Wall Pin Header Single Row Right Angle	
Part No.:	T68N050
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.07.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 3

www.edcon-components.com

email: info@edcon-components.com