



EDCON-COMPONENTS



Technical Discription


Insulator: PBT, glass reinforced rated UL94V-0
 Contact Material: Brass
 Current Rating: 2A
 Contact Reistance: 30mΩ max.
 Insulation Resistance: 3000MΩ min.
 Dielectric Withstandng Voltage: 500VAC for 1 Minute
 Operating Temperature: -40°C to + 105°C

Drawing

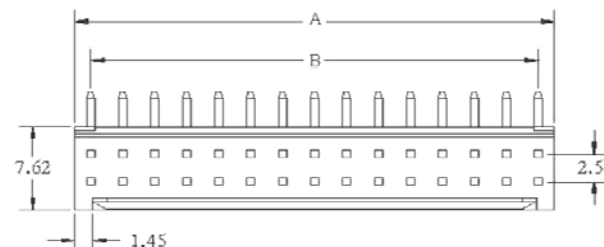


Specifications

No. of Pos.	A (mm)	B (mm)	No. of Pos.	A (mm)	B (mm)
4	5,08	2,43	40	50,80	48,26
6	7,62	5,08			
8	10,16	7,62			
10	12,70	10,16			
12	15,24	12,70			
14	17,78	15,24			
16	20,32	17,78			
18	22,80	20,32			
20	25,40	22,80			
22	27,94	25,40			
24	30,48	27,94			
26	33,02	30,48			
28	35,56	33,02			
30	38,10	35,56			
32	40,64	38,10			
34	43,18	40,64			
36	45,72	43,18			
38	48,26	45,72			

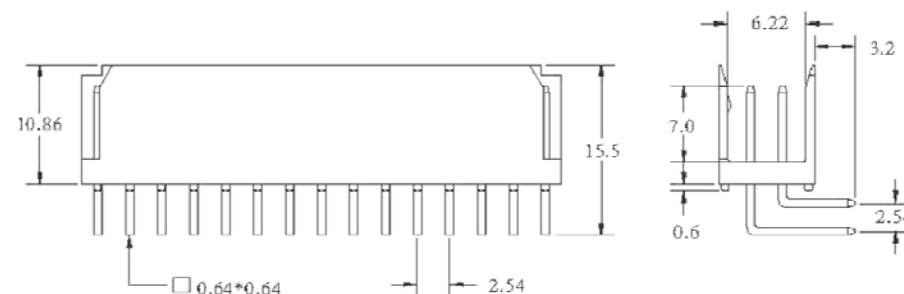

PCB Layout

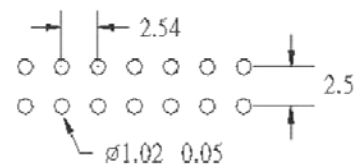


Two Wall Pin Header Dual Right Angle Pin

Part No.: **T68N051**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	18.10.2017
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 3

EDCON-COMPONENTS



Ordering Informations


Serie	No. Of Position	Contact Plating	Color of Body	ROHS	Packing					
-------	-----------------	-----------------	---------------	------	---------	--	--	--	--	--

T68N051	04	GF	BK	R	BU					
----------------	-----------	-----------	-----------	----------	-----------	--	--	--	--	--

04= 4Pos.	GF= Gold Flash	BK= Black	R= ROHS Conform	BU= Bulk-Ware
	TN= tinned	BL= Blue		
		RD= Red		
		YE= Yellow		


Two Wall Pin Header Dual Ringht Angle Pin	
Part No.:	T68N051
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	18.10.2017
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 3	



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

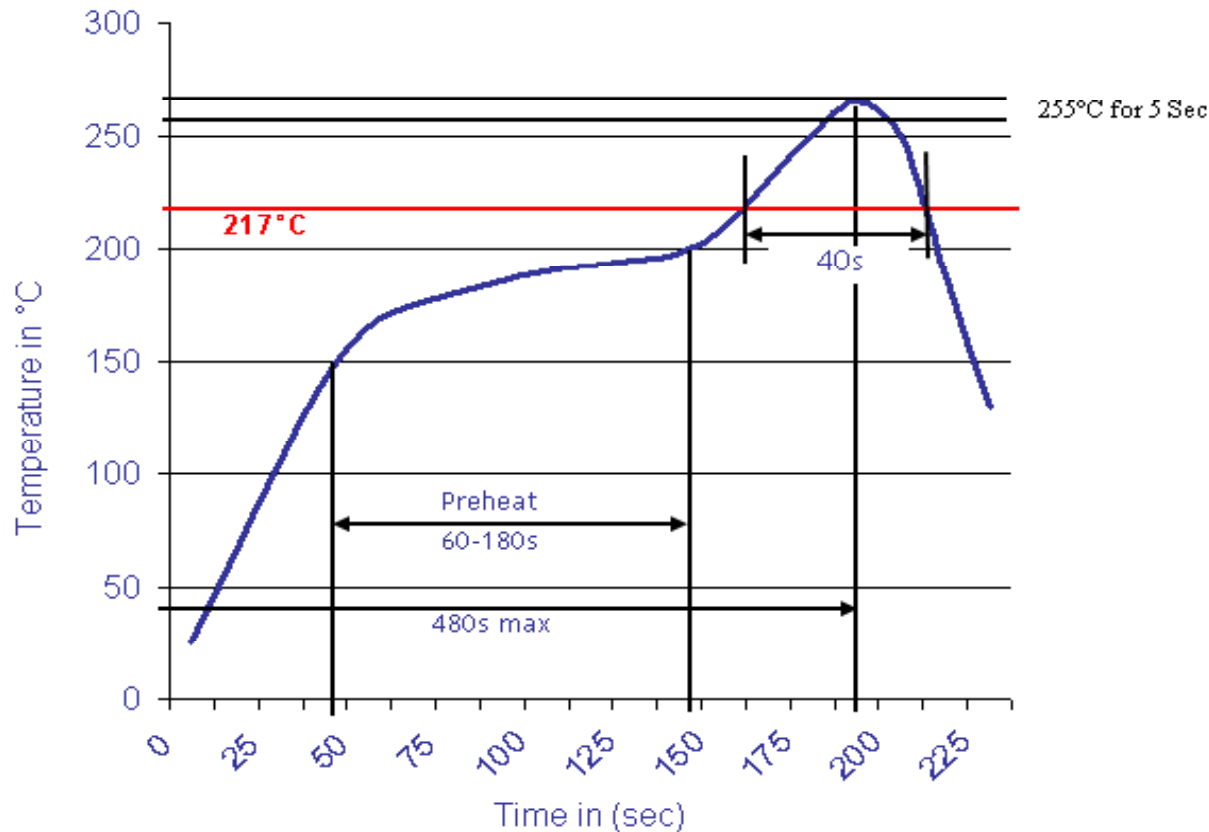

**Two Wall Pin Header Dual
 Right Angle Pin**

Part No.: **T68N051**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	18.10.2017
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 3

Customer: