



EDCON-COMPONENTS




Specifications

Voltage Rating:	125V AC/DC
Current Rating	1A AC/DC
Operating Temperature	. - 25°C ~ + 85°C
Contact Resistance	20m Ohm max.
Withstanding Voltage	250V AC/minute
Insulation Resistance	100 M Ohm min.
Material:	Nylon PA46 UL94V-0
Applicable P.C.B	
Applicable FPC/FFC	
Solder Height	
Crimp Tensile Strength	
Pin Material:	Brass / Tin Plated
Solder Tabs:	

Drawing (dimensions all into mm)

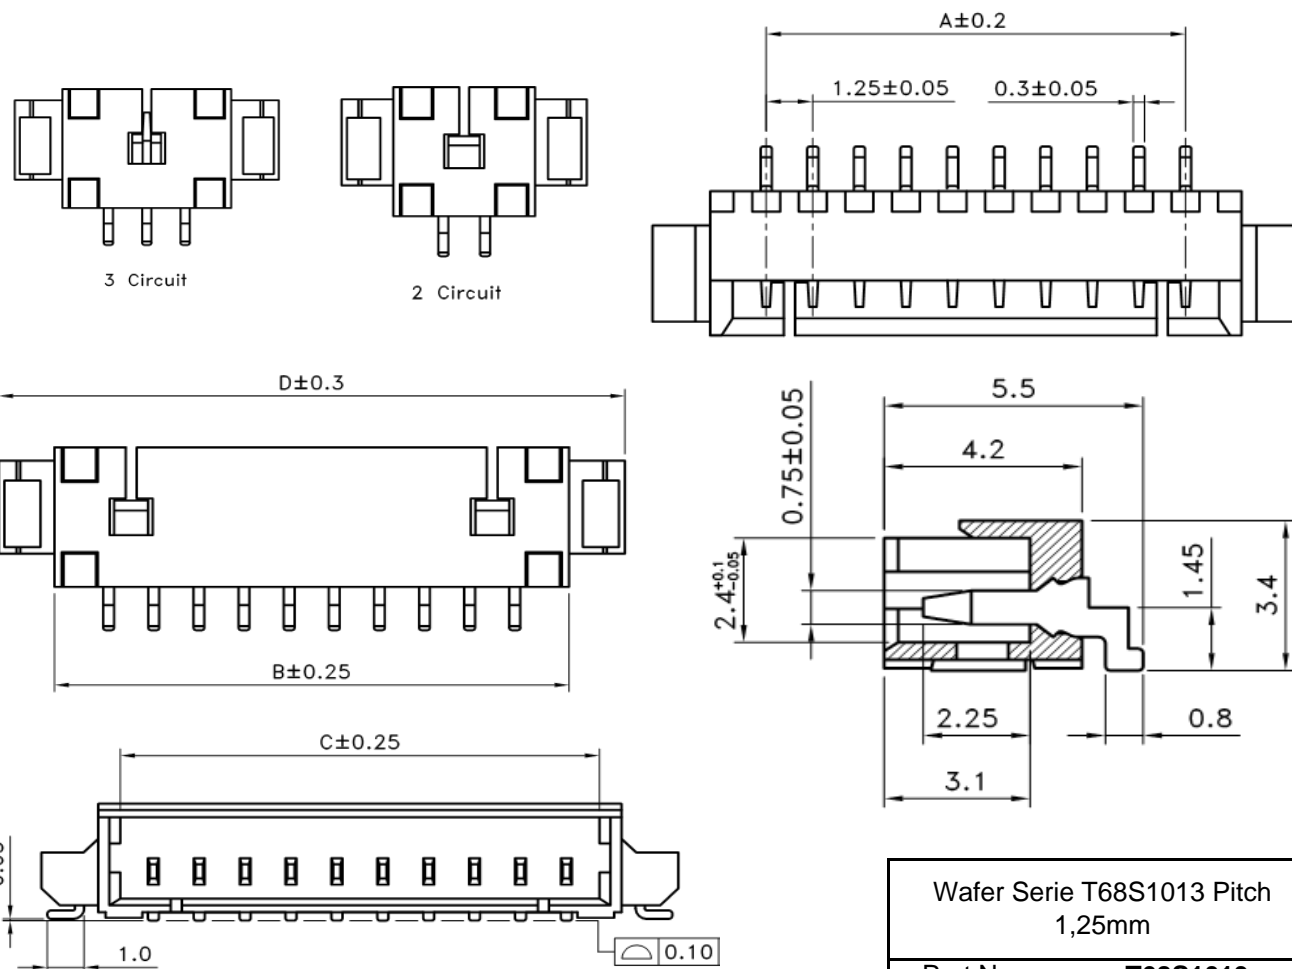

Terminal Assembly Drawing

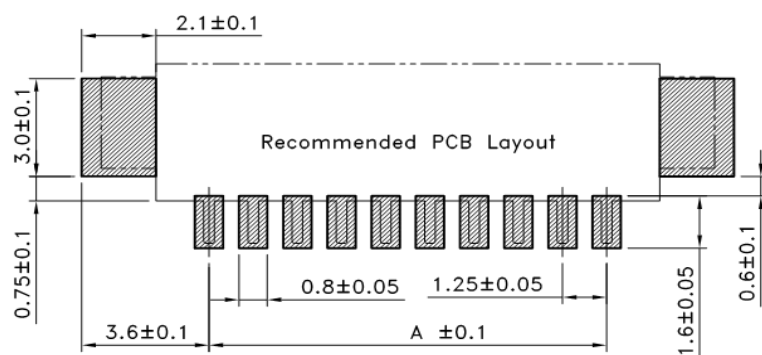


Wafer Serie T68S1013 Pitch
1,25mm

Part No.: **T68S1013**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	

EDCON-COMPONENTS




Ordering Informations

Serie	Number of Pos.	Contact Plating	ROHS Conform	Packing						
T68S1013	02	T	R	TR						


xx = Pos.	T= Tin Plated (Standard)	R= ROHS Conform	BU= Bulk (Standard)
	G= Gold Flash Plated	N= NON ROHS conform	TY= Tray Packing
			TR= Tape / Reel Packing

Wafer Serie T68S1013 Pitch 1,25mm
Part No.: T68S1013
Customer:


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4



Soldering Profile for Lead Soldering (P.B.T.)

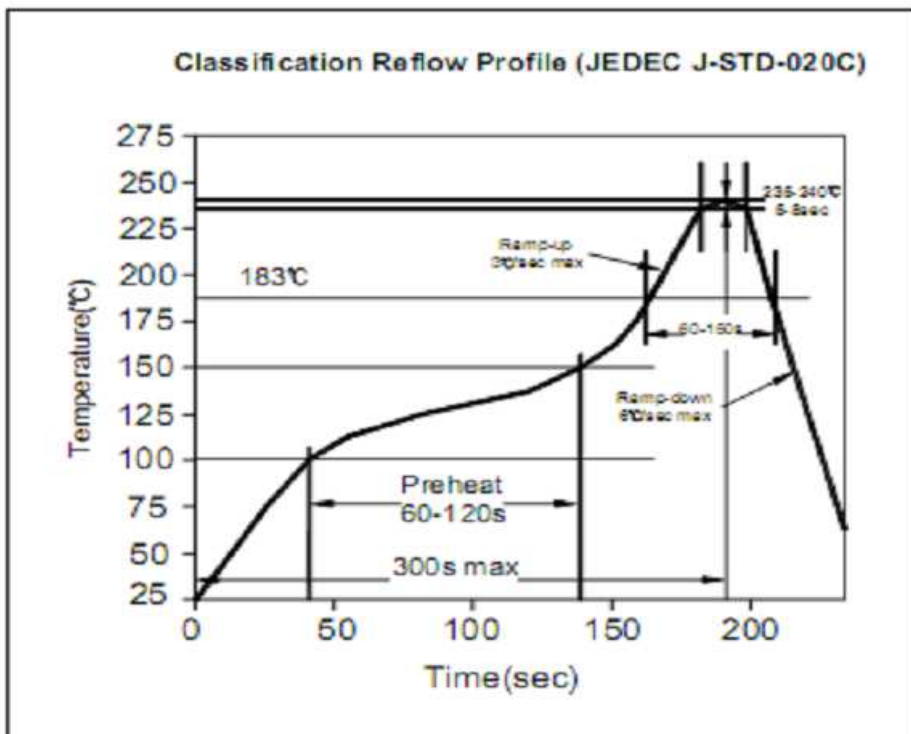

Soldering Profile for Lead Free Soldering (Nylon 6T)

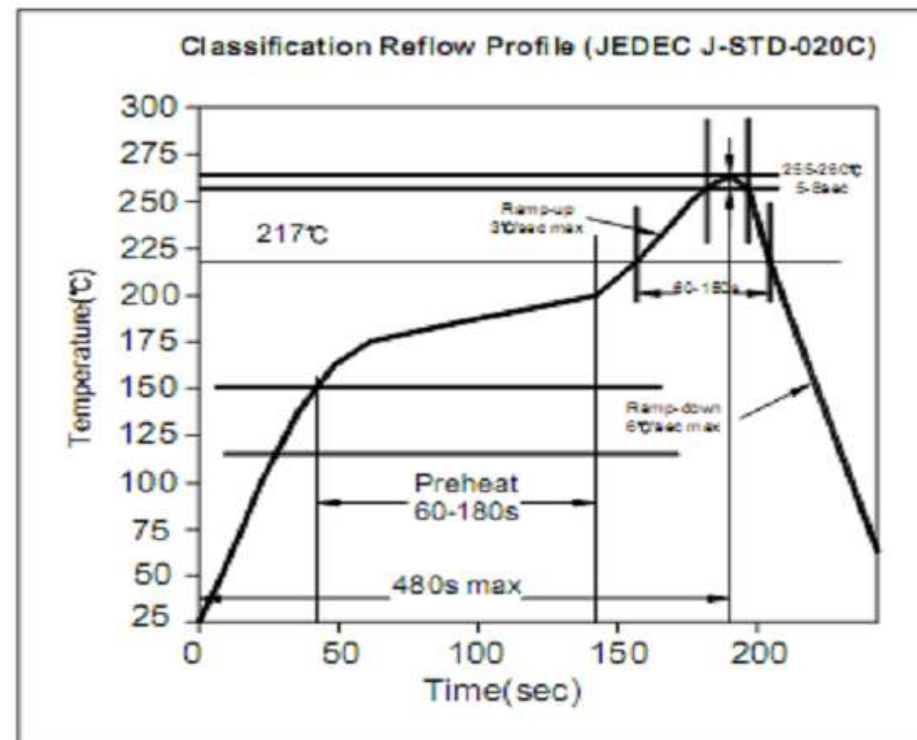

Wafer Serie T68S1013 Pitch
1,25mm

Part No.: **T68S1013**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4		