



DATA SHEET

Carbon Film Fixed Resistor N-Size 5,5x16mm 1Watt

Serie: X33004

**Carbon Film Fixed Resistor N-
Size 5,5x16mm 1Watt**

Serie No.: **X33004**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	23.10.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 6	Customer:

EDCON-COMPONENTS



Specifications

Temperature coefficient	$\leq 10\Omega \pm 350\text{PPM}/^\circ\text{C}$ $11\Omega \sim 99\text{K}\Omega \quad 0\sim 450\text{PPM}/^\circ\text{C}$ $100\text{K}\Omega \sim 1,0\text{M}\Omega \quad 0\sim 700\text{PPM}/^\circ\text{C}$ $1,0\text{M}\Omega \sim 10\text{M}\Omega \quad 0\sim 1500\text{PPM}/^\circ\text{C}$	
Short time overload	$\pm (1,0\% + 0,05\Omega)$ Max, with no evidence of mechanical damage.	
Insulation Resistance	Min. 10.000 Mega Ohm	
Dielectric withstanding voltage	No evidence of flashover , mechanical damage, arcing or insulation breackdown.	
Terminal strength	No evidence of mechanical damage.	
Resistance to soldering heat	$\pm (1,0\% + 0,05\Omega)$ Max, with no evidence of mechanical damage.	
Solderability	Min. 95% coverage.	
Resistance to solvent	No deterioration of protective coating and markings.	
Temperature cycling	$\pm (1,0\% + 0,05\Omega)$ Max, with no evidence of mechanical damage.	
Load life in Humidity	Normal Type	$<100\text{K}\Omega: \pm(3,0\% + 0,05\Omega)\text{max.}$ $\geq 100\text{K}\Omega: \pm(5,0\% + 0,05\Omega)\text{max.}$
	Non-Flame Type	$<100\text{K}\Omega: \pm(5,0\% + 0,05\Omega)\text{max.}$ $\geq 100\text{K}\Omega: \pm(10,0\% + 0,05\Omega)\text{max.}$
Load life	Normal Type	$<56\text{K}\Omega: \pm(2,0\% + 0,05\Omega)\text{max.}$ $\geq 56\text{K}\Omega: \pm(3,0\% + 0,05\Omega)\text{max.}$
	Non-Flame Type	$<100\text{K}\Omega: \pm(5,0\% + 0,05\Omega)\text{max.}$ $\geq 100\text{K}\Omega: \pm(10,0\% + 0,05\Omega)\text{max.}$

Features

- Automatically insertable
- High Quality performance
- Non-Flame type available
- Too low or to high values can be supplied on case to case basis

Note

- Standard big base color
- Standard grayish-green base color (Non-flammable coating)

**Carbon Film Fixed Resistor N-
Size 5,5x16mm 1Watt**

Part No.: **X33004**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	23.10.2011	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 6		

EDCON-COMPONENTS



Dimensions



Power Rating at 70°C	Dimension (mm)				
	D max.	L max.	d±0.05	H±3	Packing Qty
1W	5,5	16,0	0,70	28	1000PCS

Maximum Working Voltage	Maxi,u, Overload Voltage	Dielectric Withstanding Voltage	Tolerance	Resistange Range	For other ranges please consult EDCON
500V	1000V	1000V	± 1%	1Ω ~ 10MΩ	
			± 2%	1Ω ~ 10MΩ	
			± 5%	1Ω ~ 10MΩ	

**Carbon Film Fixed Resistor N-
Size 5,5x16mm 1Watt**


Part No.: **X33004**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	23.10.2011	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 6	


EDCON-COMPONENTS




Derating Curve

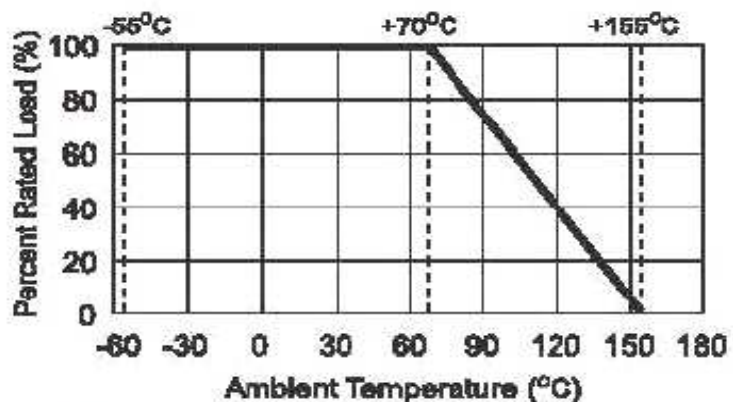

Current Noise

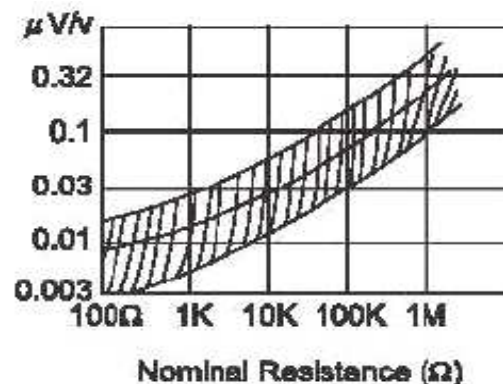

Heat Rise Chart

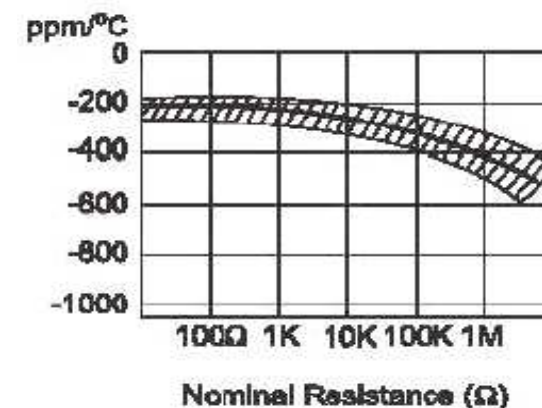

**Carbon Film Fixed Resistor N-
Size 5,5x16mm 1Watt**

Part No.: **X33004**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	23.10.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 6	Customer:

EDCON-COMPONENTS



Ordering Informations

Serie	Range	Tolerance	Feature	Special function	ROHS	Packing Code
-------	-------	-----------	---------	------------------	------	--------------

X33004	106	J	S	00	R	TA
---------------	------------	----------	----------	-----------	----------	-----------

106= 10MΩ f. Tol. 5%	F= 1%	S= Standard	00= no function	R= ROHS Conform	BU= Bulk Ware
1005= 10MΩ f. Tol. 1%	G= 2%	I= Non Inductive		N= NON ROHS Conform	TA= Tape Ammo Pack
	J= 5% (Standard)	F= Non Flame			TR= Tape Reel

**Carbon Film Fixed Resistor N-
Size 5,5x16mm 1Watt**

Part No.: **X33004**


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	23.10.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.		5 from 6

Customer:



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

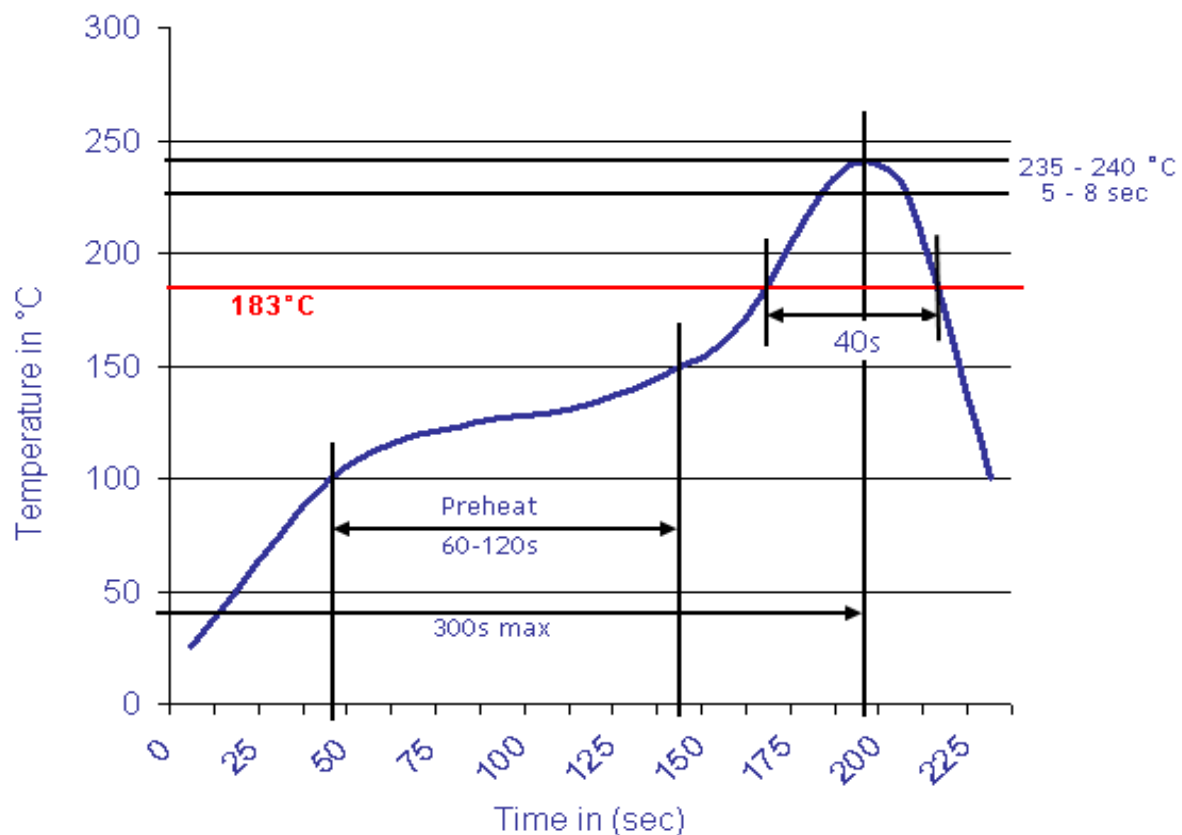

Carbon Film Fixed Resistor N- Size 5,5x16mm 1Watt	
Part No.:	X33004
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	23.10.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.	6 from 6	