



**THT, Radial E-Cap., Standard Serie for general purposes, High CV value, Long Lead, ROHS Conform, Packing Bulk-Ware into Polybag/Box**


| Items                                                                         |                 |     | Performance Characteristics                                                                       |      |      |      |        |      |         |                                      |      |         |         |
|-------------------------------------------------------------------------------|-----------------|-----|---------------------------------------------------------------------------------------------------|------|------|------|--------|------|---------|--------------------------------------|------|---------|---------|
| Operating temperature range                                                   |                 |     | -40°C +105°C (6,3V~450V; -25°C ~+105°C (500V                                                      |      |      |      |        |      |         |                                      |      |         |         |
| Leakage current max.                                                          |                 |     | WV≤100                                                                                            |      |      |      |        |      |         | WV≥100                               |      |         |         |
|                                                                               |                 |     | I = 0,01CV or 3µA whichever is greater (after 2 minutes                                           |      |      |      |        |      |         | I = 0,02CV + 15µA ( after 5 minutes) |      |         |         |
|                                                                               |                 |     | I = 0,03CV or 4µA whichever is greater (after 1 minutes                                           |      |      |      |        |      |         |                                      |      |         |         |
| Capacitance tolerance                                                         |                 |     | ±20% at 120Hz, 20°C                                                                               |      |      |      |        |      |         |                                      |      |         |         |
| Dissipation factor max.<br>(at 120Hz, 20°C)                                   |                 |     | Capacitance > 1000µF ; tanQ increases by 0,02 for each 1000µF from below value.                   |      |      |      |        |      |         |                                      |      |         |         |
|                                                                               |                 |     | WV                                                                                                | 6,3  | 10   | 16   | 25     | 35   | 50      | 63                                   | 100  | 160~250 | 350~500 |
|                                                                               |                 |     | TanQ                                                                                              | 0,28 | 0,24 | 0,20 | 0,16   | 0,14 | 0,12    | 0,10                                 | 0,08 | 0,15    | 0,20    |
| Low temperature<br>characteristics (Impedance<br>ratio at 120Jz)              | WV              | 6,3 | 10                                                                                                | 16   | 25   | 35   | 50~100 | 160  | 200~350 | 400~450                              | 500  |         |         |
|                                                                               | Z-25°C / Z+20°C | 5   | 4                                                                                                 | 3    | 2    | 2    | 2      | 4    | 6       | 10                                   | 12   |         |         |
|                                                                               | Z-40°C / Z+20°C | 12  | 10                                                                                                | 8    | 5    | 4    | 3      | 6    | 8       | 12                                   | -    |         |         |
| Load life ( after application of<br>the rated voltage for 2000hrs at<br>85°C) |                 |     | Leakage Current                                                                                   |      |      |      |        |      |         | Less than specified Value            |      |         |         |
|                                                                               |                 |     | Capacitance Change                                                                                |      |      |      |        |      |         | Within ±20% of initial value         |      |         |         |
|                                                                               |                 |     | TanQ                                                                                              |      |      |      |        |      |         | Less than 200% of specified value    |      |         |         |
| Shelf life (at 85°C)                                                          |                 |     | After 1000 hours no load test, leakage current, capacitance and tanQ are same as load life value. |      |      |      |        |      |         |                                      |      |         |         |

**FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT**

| WV      | µF/Frequency | 60Hz | 120Hz | 1kHz | 10kHz | 50kHz | 100kHz≤ |
|---------|--------------|------|-------|------|-------|-------|---------|
| 6,3~100 | ~47          | 0,75 | 1,00  | 1,55 | 2,00  | 2,00  | 2,00    |
|         | 68~680       | 0,80 | 1,00  | 1,35 | 1,50  | 1,62  | 1,75    |
|         | 820~         | 0,85 | 1,00  | 1,15 | 1,15  | 1,32  | 1,50    |
| 160~500 | ~220         | 0,80 | 1,00  | 1,40 | 1,60  | 1,70  | 1,80    |
|         | 330~         | 0,90 | 1,00  | 1,13 | 1,15  | 1,32  | 1,50    |

**Technical Details**

|                                   |                |        |      |
|-----------------------------------|----------------|--------|------|
| Range (µF)                        | 3,3            | ØD(mm) | 5,0  |
| Voltage (V)                       | 63             | L(mm)  | 11,0 |
| Impedance (Ω)                     | -.-            | F(mm)  | 2,0  |
| Ripple Current (mA)               | 31             | Ød(mm) | 0,5  |
| ESR (Ω) max.at 20°C 10KHz         | -.-            | α(mm)  | 1,5  |
| Lifetime (hrs)                    | 2000           | -.-    | -.-  |
| Operating- Temperature Range (°C) | -40°C ~ +105°C | -.-    | -.-  |

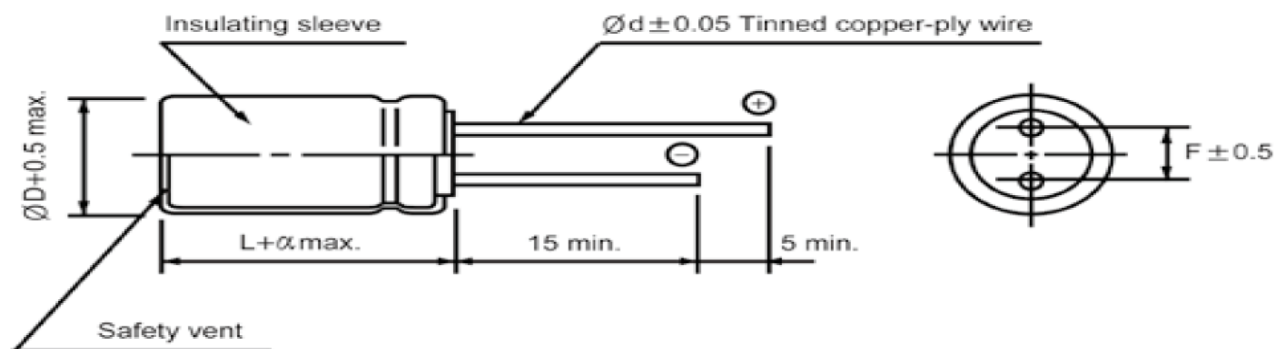

|       |       |      |        |        |        |       |            |
|-------|-------|------|--------|--------|--------|-------|------------|
| DRW:  | Lexua | CHKD | Wilson | MATL:  | ChuChu | DATE  | 09.12.2024 |
| APPD: | Jimmy |      |        | FINISH | Josy   | Sheet | 1 from 2   |



THT, Radial E-Cap., Standard Serie for general purposes, High CV value, Long Lead, ROHS Conform, Packing Bulk-Ware into Polybag/Box

### Ordering Informations:

| Serie-No. / Voltage / Range / Size | Capacity Tolerance | ROHS | Packing |
|------------------------------------|--------------------|------|---------|
|------------------------------------|--------------------|------|---------|

|                   |   |   |    |
|-------------------|---|---|----|
| 114009-6303R30511 | M | R | BU |
|-------------------|---|---|----|

| Serie | Voltage (V) | Range $\mu$ H) | D * L (mm) | Tolerance Order Code | R= ROHS<br>N= NON ROHS | BU= Bulk-Ware Long Lead<br>T/B= Tape/Box<br>L3= Lead-Length 3~3,5mm |
|-------|-------------|----------------|------------|----------------------|------------------------|---------------------------------------------------------------------|
|-------|-------------|----------------|------------|----------------------|------------------------|---------------------------------------------------------------------|

### Soldering Information

#### Lead Solder Performance



#### Lead free Solder Performance



|       |       |      |        |        |        |       |            |
|-------|-------|------|--------|--------|--------|-------|------------|
| DRW:  | Lexua | CHKD | Wilson | MATL:  | ChuChu | DATE  | 09.12.2024 |
| APPD: | Jimmy |      |        | FINISH | Josy   | Sheet | 2 from 2   |