

# MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

## I14068 (BC)


For PSU, High Ripple, 20000 hours at 105°C Series

- High reliability withstanding 20000 hours load life at 105°C
- For power supply and adapter
- Complied to the RoHS directive

Items	Performance characteristics									
Operating temperature range	-40 ~ +105°C (160V~450V); -25 ~ +105°C (500V)									
Leakage current max.	I=0.04CV + 100μA (after 1 minute) I=0.02CV + 25μA (after 5 minutes)									
Capacitance tolerance	±20% at 120Hz, 20°C									
Dissipation factor max. (at 120Hz, 20°C)	WV	160	200	250	350	400	420	450	500	
	Tanδ	0.20	0.20	0.20	0.24	0.24	0.24	0.24	0.24	
Low temperature characteristics (Impedance ratio at 120Hz)	WV	160	200	250	350	400	420	450	500	
	Z-25°C / Z+20°C	3	3	3	3	6	6	6	6	
	Z-40°C / Z+20°C	4	4	4	6	6	6	6	-	
Load life (after application of the rated voltage for 20000 hours at 105°C)	Leakage current					Less than specified value				
	Capacitance change					Within ±20% of initial value				
	Tanδ					Less than 200% of specified value				
	Φ10:15000 hours.									
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and tanδ are same as load life value.									

### ● DRAWING

Unit : mm

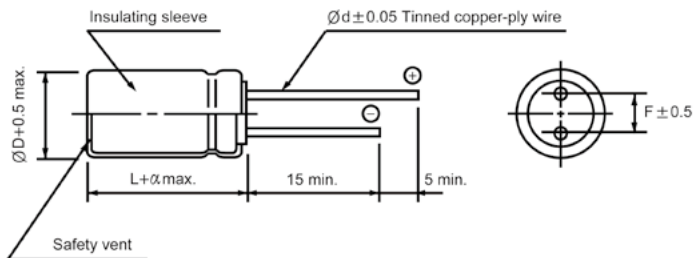

ΦD	10	12.5	16	18	22
F	5.0	5.0	7.5	7.5	10.0
Φd	0.6		0.8		
α	2.0				3.0

### ● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

Frequency μF	120Hz	1kHz	10kHz	50kHz	100kHz≤
3.3 ~ 82	1.00	1.75	2.25	2.35	2.50
100 ~ 470	1.00	1.67	2.05	2.15	2.25

# MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

## I14068 (BC) Series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV μF	160		200		250		350	
6.8					10×12.5	119	10×12.5	105
10					10×12.5	160	10×16	149
15			10×12.5	150	10×16	220	10×20	197
22	10×12.5 10×16	221 243	10×16	243	10×20	240	12.5×20	297
27	10×16	264	10×20	280	10×20	270	12.5×20	314
33	10×16	270	10×20	308	12.5×20	323	12.5×25	325
39	10×20	320	10×25	350	12.5×20	354	12.5×25	352
47	10×20	369	12.5×20	440	12.5×25	460	12.5×30	451
68	12.5×25	480	12.5×25	594	12.5×30	610	16×31.5	623
82	12.5×25	525	12.5×30 16×20	640 616	16×25	680	18×25	688
100	12.5×25	575	16×25	717	16×25	717	18×31.5	817
120	12.5×30	670	16×25	785	16×31.5	804	18×35.5	924
150	16×25	825	16×31.5	813	16×35.5	902	18×40	1083
180	16×25	891	16×35.5	951	18×31.5	1012	18×45	1230
220	16×31.5 18×25	968 968	18×31.5	1100	18×35.5	1121		
270	16×35.5	1100	18×40	1290				
330	18×31.5	1231	18×45	1390				
470	18×45	1626						

↑ ↑  
Ripple current (mA rms) at 105°C , 120Hz  
Case size ΦD×L(mm)

WV μF	400		420		450		500	
3.3							10×12.5	63
4.7					10×12.5	76	10×16	83
6.8	10×16	85			10×16	110	10×20	119
8.2	10×16	140	10×16	113	10×20	122	10×20	141
10	10×16	145	10×20	135	10×20	135	12.5×20	165
22	12.5×20	297	12.5×25	250	12.5×25	296	16×25	260
27	12.5×25	330	12.5×25	265	12.5×30	305	16×25	329
33	12.5×30	355	12.5×30 16×20	340 345	16×25	364	16×31.5	380
39	16×25	400	16×25	400	16×31.5	423	16×35.5	434
47	16×25	480	16×25	450	16×31.5	478	18×31.5	468
68	16×35.5	627	18×31.5	580	18×31.5	590	18×40	630
82	16×40	770	16×40	620	18×35.5	670	18×45	685
100	18×35.5	875	18×35.5	770	18×40	794	22×40	800
120	18×40	1003	18×45	900	18×50	940	22×50	960
150	18×50	1192						