


[illegible]

Range (μF)	4,7		∅D(mm)	5,0
Voltage	35		L(mm)	11,0
Impedance (Ω)	-.		F(mm)	2,0
Ripple Current (mA)	-.		∅d(mm)	0,5
ESR (Ω) max.at 20°C 10KHz	-.		α(mm)	1,5
Lifetime (hrs)	1000		-.	-.
Operating- Temperature Range (°C)	-.40°C ~ +85°C		-.	-.

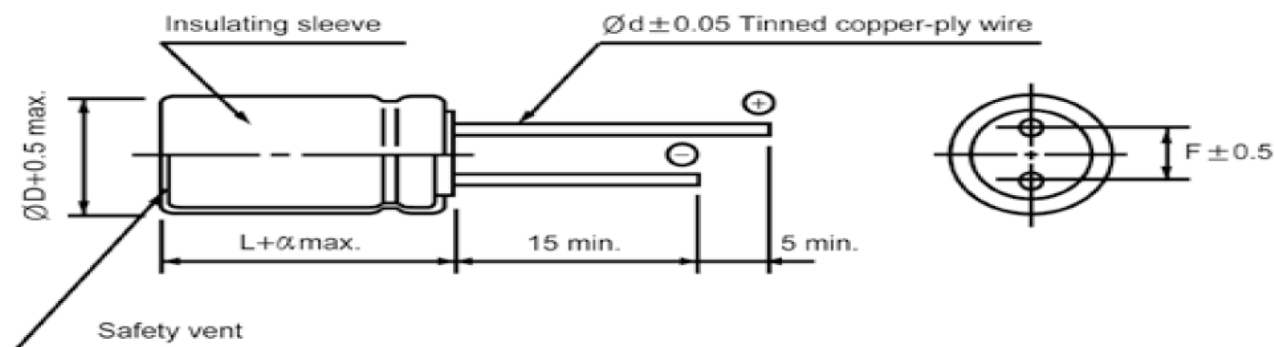

ØD	5	6,3	8	10	12,5	16
F	2,0	2,5	3,5	5,0	5,0	7,5
Ød	0,5			0,6		0,8
α	1,5			2,0		

DRW:	Lexua	CHKD	Wilson	MATL:	ChuChu	DATE	23.12.2024
APPD:	Jimmy			FINISH	Josy	Sheet	1 from 2

email:info@edcon-components.com



THT, Radial E-Cap., Bi-polarized, for audio equipment , suited for audio signal circuits, Long Lead, ROHS Conform, Packing Bulk-Ware into Polybag

Ordering Informations:

Serie-No. / Voltage / Range / Size	Capacity Tolerance	ROHS	Packing
------------------------------------	--------------------	------	---------

114074-3504R70511	M	R	BU
-------------------	---	---	----

Serie	Voltage (V)	Range μ H)	D * L (mm)	Tolerance Order Code	R= ROHS N= NON ROHS	BU= Bulk-Ware Long Lead T/B= Tape/Box L3= Lead-Length 3~3,5mm
-------	-------------	----------------	------------	----------------------	------------------------	---

Soldering Information

Lead Solder Performance



Lead free Solder Performance



DRW:	Lexua	CHKD	Wilson	MATL:	ChuChu	DATE	23.12.2024
APPD:	Jimmy			FINISH	Josy	Sheet	2 from 2