



THT, Radial E-Cap., Snap-In, ,105°C High Speed charge discharge, Suited for high frequency voltage for AC servomotor, general inverter, Suited for equipment used at voltage fluctuating area, suited for rectifier circuit of voltage doubler, ROHS Conform, Packing Box

Items			Performance Characteristics										
Operating temperature range			-40°C ~ +105°C										
Leakage current max.			I=3 √cv (μA) (after 5 minutes)										
Capacitance tolerance			±20% at 120Hz, 20°C										
Dissipation factor max. (at 120Hz, 20°C)													
			WV			350	400	420	450				
			TanQ			0,15	0,15	0,20	0,20				
Endurance of charge-discharge behavior			Leckage Current					Less than specified Value					
			Capacitance Change					Within ±20% off initial Value					
			TanQ					Less than 300% of specified value					
Load life (after application of the rated voltage for 2000hrs at 105°C)			Leckage Current					Less than specified Value					
			Capacitance Change					Within ±20% off initial Value					
			TanQ					Less than 200% of specified value					
Shelf life (at 105°C)			Shell Life (after leaving capacitor under no load at 105°C for 1000hrs)										

FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

WV / Frequency	50HZ	60HZ	120Hz	300Hz	1kHz	10kHz	50kHz≤
350 ~ 450	0,77	0,82	1,00	1,16	1,30	1,41	1,43

Technical Details

Range (μF)	180	ØD(mm)	25,0
Voltage	450	L(mm)	35,0
Impedance (Ω)	-. -	F(mm)	10,0
Ripple Current (mA)	0,87	Ød(mm)	0
ESR (Ω) max.at 20°C 10KHz	-. -	α(mm)	0
Lifetime (hrs)	3000	-. -	2,0
Operating- Temperature Range (°C)	-.25°C ~ +105°C	-. -	-. -

ØD≤40





PC Board Mounting Holes

Terminal




* Shorter terminal(4.0±0.5) is also available upon request.
Terminal length of height 20mm products is applied shorter terminal to standard terminal type.

ØD=35, 40

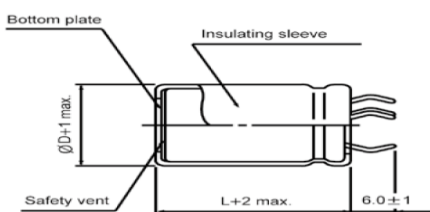

PC Board Mounting Holes



DRW:	Lexua	CHKD	Wilson	MATL:	ChuChu	DATE	15.01.2025
APPD:	Jimmy			FINISH	Josy	Sheet	1 from 2

Copyright by S.Tiede



THT, Radial E-Cap., Snap-In, ,105°C High Speed charge discharge, Suited for high frequency voltage for AC servomotor, general inverter, Suited for equipment used at voltage fluctuating area, suited for rectifier circuit of voltage doubler, ROHS Conform, Packing Box

Ordering Informations:


Serie-No. / Voltage / Range / Size	Capacity Tolerance	ROHS	Packing
------------------------------------	--------------------	------	---------

I14089-4511812535	M	R	BU
-------------------	---	---	----

Serie	Voltage (V)	Range μ H)	D * L (mm)	Tolerance Order Code	R= ROHS	BU= Bulk-Ware (Box)
					N= NON ROHS	

Soldering Information

Lead Solder Performance

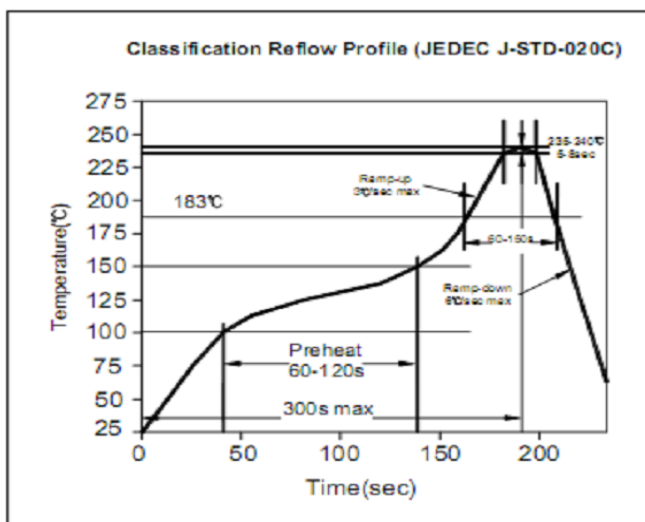

Lead free Solder Performance



DRW:	Lexua	CHKD	Wilson	MATL:	ChuChu	DATE	15.01.2025
APPD:	Jimmy			FINISH	Josy	Sheet	2 from 2