



**THT, Radial E-Cap., High Reliability, Suitable for Slim application, Long Lead, ROHS Conform, Packing Bulk-Ware into Polybag**


| Items                                                                    |                 | Performance Characteristics                                                                       |  |  |  |  |  |  |                                   |         |         |  |
|--------------------------------------------------------------------------|-----------------|---------------------------------------------------------------------------------------------------|--|--|--|--|--|--|-----------------------------------|---------|---------|--|
| Operating temperature range                                              |                 | -40°C +105°C (250V) , -25°C to +105°C (350V~500V)                                                 |  |  |  |  |  |  |                                   |         |         |  |
| Leakage current max.                                                     |                 |                                                                                                   |  |  |  |  |  |  |                                   |         |         |  |
|                                                                          |                 | I = 0,02CV + 15µA (after 5 minutes)                                                               |  |  |  |  |  |  |                                   |         |         |  |
|                                                                          |                 |                                                                                                   |  |  |  |  |  |  |                                   |         |         |  |
| Capacitance tolerance                                                    |                 | ±20% at 120Hz, 20°C                                                                               |  |  |  |  |  |  |                                   |         |         |  |
| Dissipation factor max.<br>(at 120Hz, 20°C)                              |                 |                                                                                                   |  |  |  |  |  |  |                                   |         |         |  |
|                                                                          |                 | WV                                                                                                |  |  |  |  |  |  |                                   | 250     | 350~500 |  |
|                                                                          |                 | TanQ                                                                                              |  |  |  |  |  |  |                                   | 0,15    | 0,20    |  |
| Low temperature characteristics (Impedance ratio at 120Jz)               |                 |                                                                                                   |  |  |  |  |  |  | 250                               | 350~500 |         |  |
|                                                                          | Z-25°C / Z+20°C | 2                                                                                                 |  |  |  |  |  |  | 3                                 | 8       |         |  |
|                                                                          | Z-40°C / Z+20°C | 3                                                                                                 |  |  |  |  |  |  | 4                                 | -       | -       |  |
| Load life ( after application of the rated voltage for 2000hrs at 105°C) |                 | Leakage Current                                                                                   |  |  |  |  |  |  | Less than specified Value         |         |         |  |
|                                                                          |                 | Capacitance Change                                                                                |  |  |  |  |  |  | Within ±20% of initial value      |         |         |  |
|                                                                          |                 | TanQ                                                                                              |  |  |  |  |  |  | Less than 200% of specified value |         |         |  |
| Shelf life (at 105°C)                                                    |                 | After 1000 hours no load test, leakage current, capacitance and tanQ are same as load life value. |  |  |  |  |  |  |                                   |         |         |  |

**FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT**

|  | Frequency   | 50Hz | 120Hz | 1kHz | 10kHz |  | 100kHz≤ |
|--|-------------|------|-------|------|-------|--|---------|
|  | Coefficient | 0,75 | 1,00  | 1,35 | 1,50  |  | 2,00    |
|  |             |      |       |      |       |  |         |
|  |             |      |       |      |       |  |         |
|  |             |      |       |      |       |  |         |

**Technical Details**

|                                   |                |  |        |      |  |  |  |  |
|-----------------------------------|----------------|--|--------|------|--|--|--|--|
| Range (µF)                        | 15             |  | ØD(mm) | 8,0  |  |  |  |  |
| Voltage                           | 350            |  | L(mm)  | 40,0 |  |  |  |  |
| Impedance (Ω)                     | ~.             |  | F(mm)  | 3,5  |  |  |  |  |
| Ripple Current (mA)               | 145            |  | Ød(mm) | 0,5  |  |  |  |  |
| ESR (Ω) max.at 20°C 10KHz         | ~.             |  | α(mm)  | 1,5  |  |  |  |  |
| Lifetime (hrs)                    | 2000           |  | ~.     | ~.   |  |  |  |  |
| Operating- Temperature Range (°C) | ~25°C ~ +105°C |  | ~.     | ~.   |  |  |  |  |

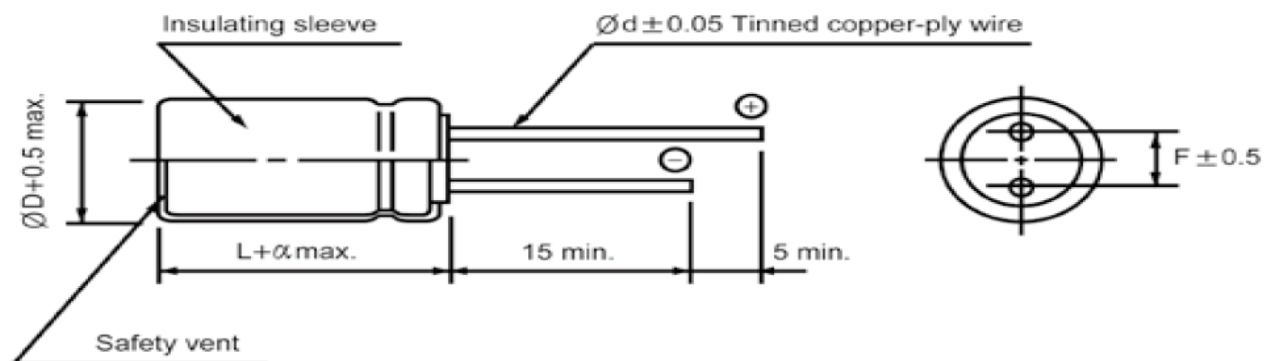

|    |     |     |      |
|----|-----|-----|------|
| ØD | 8   | 10  | 12,5 |
| F  | 3,5 | 5,0 | 5,0  |
| Ød | 0,5 | 0,6 | 0,6  |
| α  | 1,5 | 2,0 |      |

|       |       |      |        |        |        |       |            |
|-------|-------|------|--------|--------|--------|-------|------------|
| DRW:  | Lexua | CHKD | Wilson | MATL:  | ChuChu | DATE  | 03.02.2025 |
| APPD: | Jimmy |      |        | FINISH | Josy   | Sheet | 1 from 2   |



THT, Radial E-Cap., High Reliability, Suitable for Slim application, Long Lead, ROHS Conform, Packing Bulk-Ware into Polybag

### Ordering Informations:

| Serie-No. / Voltage / Range / Size | Capacity Tolerance | ROHS | Packing |
|------------------------------------|--------------------|------|---------|
|------------------------------------|--------------------|------|---------|

|                   |   |   |    |
|-------------------|---|---|----|
| I14114-3511500840 | M | R | BU |
|-------------------|---|---|----|

| Serie | Voltage (V) | Range $\mu$ H) | D * L (mm) | Tolerance Order Code | R= ROHS<br>N= NON ROHS | BU= Bulk-Ware Long Lead<br>T/B= Tape/Box<br>L3= Lead-Length 3~3,5mm |
|-------|-------------|----------------|------------|----------------------|------------------------|---------------------------------------------------------------------|
|-------|-------------|----------------|------------|----------------------|------------------------|---------------------------------------------------------------------|

### Soldering Information

#### Lead Solder Performance



#### Lead free Solder Performance



|       |       |      |        |        |        |       |            |
|-------|-------|------|--------|--------|--------|-------|------------|
| DRW:  | Lexua | CHKD | Wilson | MATL:  | ChuChu | DATE  | 03.02.2025 |
| APPD: | Jimmy |      |        | FINISH | Josy   | Sheet | 2 from 2   |