



THT, Radial E-Cap., High Reliability withstanding to 10000hours at 105°C, WV to 500V, Suitable for Slim application, Long Lead, ROHS Conform, Packing Bulk-Ware into Polybag


Items		Performance Characteristics										
Operating temperature range		-40°C +105°C (250V) ; -25°C ~ +105°C (350~500V)										
Leakage current max.												
		I = 0,02CV + 15µA (after 5 minutes)										
Capacitance tolerance		±20% at 120Hz, 20°C										
Dissipation factor max. (at 120Hz, 20°C)		Capacitance > 1000µF ; tanQ increases by 0,02 for each 1000µF from below value.										
		WV									250	350~500
		TanQ									0,15	0,20
Low temperature characteristics (Impedance ratio at 120Jz)	WV									250	350~500	
	Z-25°C / Z+20°C									3	8	
	Z-40°C / Z+20°C									4	-	
Load life (after application of the rated voltage for 10000hrs at 105°C)		Leakage Current							Less than specified Value			
		Capacitance Change							Within ±20% of initial value			
		TanQ							Less than 200% of specified value			
		ø8, (250V)= 5000hours ø10~ø12,5 : (250V) 10000Hours,; 350~500V : 5000hours										
Shelf life (at 105°C)		After 1000 hours no load test, leakage current, capacitance and tanQ are same as load life value.										

FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

	Frequency	50HZ	120Hz	1kHz	10kHz		100kHz≤
	Coefficient	0,75	1,00	1,35	1,50		2,00

Technical Details

Range (µF)	100	ØD(mm)	10,0
Voltage	250	L(mm)	50,0
Impedance (Ω)	.-.	F(mm)	5,0
Ripple Current (mA)	585	Ød(mm)	0,6
ESR (Ω) max.at 20°C 10KHz	.-.	α(mm)	2
Lifetime (hrs)	10000	.-.	.-.
Operating- Temperature Range (°C)	.-40°C ~ +105°C	.-.	.-.

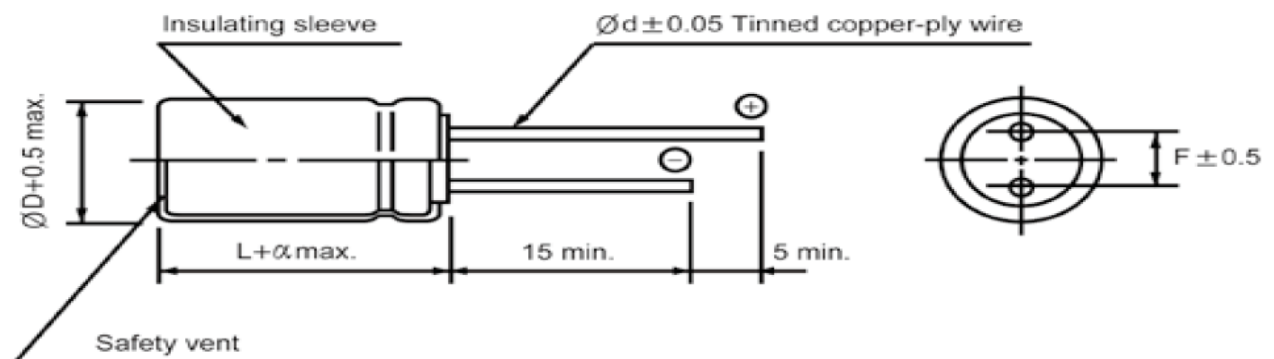

ØD	8	10	12,5
F	3,5	5,0	5,0
Ød	0,5	0,6	0,8
α	1,5	2,0	

DRW:	Lexua	CHKD	Wilson	MATL:	ChuChu	DATE	17.01.2025
APPD:	Jimmy			FINISH	Josy	Sheet	1 from 2



THT, Radial E-Cap., High Reliability withstanding to 10000hours at 105°C, WV to 500V, Suitable for Slim application, Long Lead, ROHS Conform, Packing Bulk-Ware into Polybag

Ordering Informations:

Serie-No. / Voltage / Range / Size	Capacity Tolerance	ROHS	Packing
------------------------------------	--------------------	------	---------

I14115-2511011050	M	R	BU
-------------------	---	---	----


Serie	Voltage (V)	Range μ H)	D * L (mm)	Tolerance Order Code	R= ROHS N= NON ROHS	BU= Bulk-Ware Long Lead T/B= Tape/Box L3= Lead-Length 3~3,5mm
-------	-------------	----------------	------------	----------------------	------------------------	---

Soldering Information

Lead Solder Performance



Lead free Solder Performance

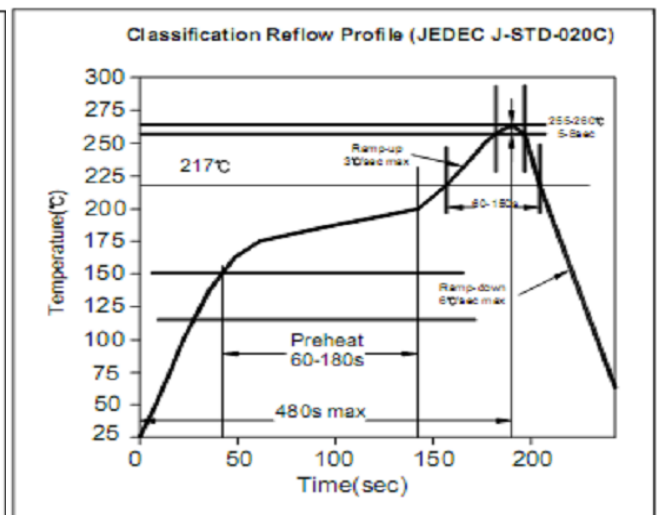

DRW:	Lexua	CHKD	Wilson	MATL:	ChuChu	DATE	17.01.2025
APPD:	Jimmy			FINISH	Josy	Sheet	2 from 2