






EDCON-COMPONENTS



Technical Discription

Curent Rating:	2,0A
Contact Resistance:	30mΩ max.
Withstanding Voltage:	500VAC for 1 minute
Insulation Resistance:	3000MΩ Min
Operating Temperature:	.-40°c to + 105°C
Contact Material:	Phosphor Bronze
Contact Plating:	Matte SN over Ni
Insulator Material:	PC UL94V-0
Terminated with	2,5mm FLAT-ribbon Cable

Drawing

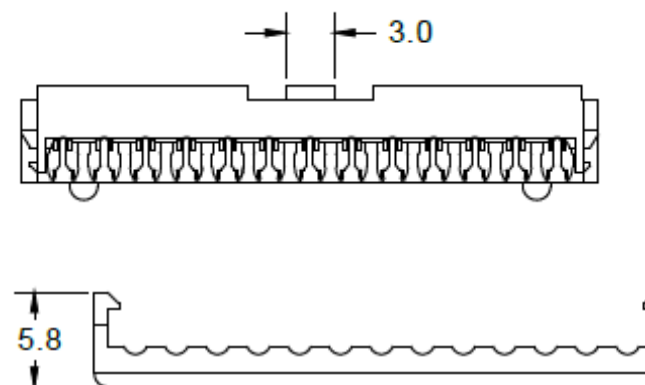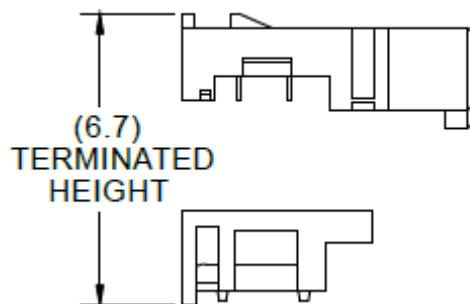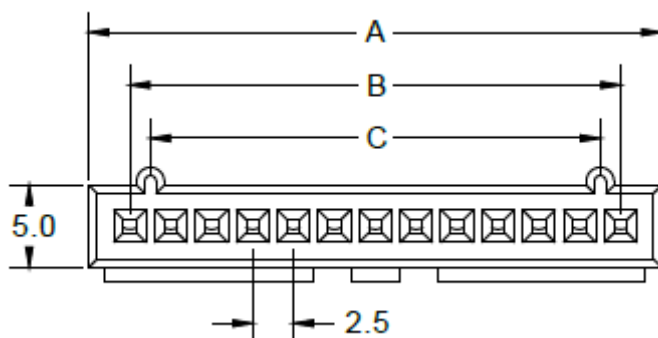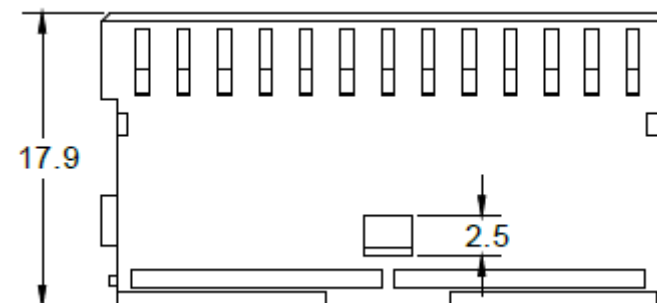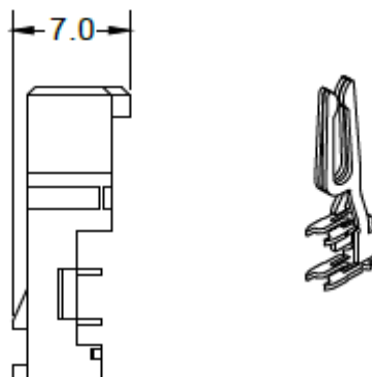

**IDC Wire to Board Connector
Single Inline Row**

Part No.: **T68P159**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.06.2019
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	

EDCON-COMPONENTS



Ordering Informations

Serie	No. Of Position	Contact Plating	Contact Material	Color of Body	Special Function	Special Function	ROHS	Packing		
T68P159	02	TN	PB	BK	N	N	R	BU		

02= 2Pos.	TN= tinned			N= No Function	N= No Function	R= ROHS Conform	BU= Bulk-Ware
2 ~ 20Pos.		PB= Phosphor Bronze	BK= Black			N= NON ROHS Conform	TU= Tube Packing
							TY= Tray Packing
							IV= Individual Packing

IDC Wire to Board Connector Single Inline Row	
Part No.:	T68P159
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.06.2019
APPD:	Schumi			FINISH	Jamy			Sheet No.	3 from 3