

# SMAJ5918B THRU SMAJ5942B

## Features


- Lead Free Finish/Rohs Compliant (Note1) ("P" Suffix designates Compliant. See ordering information)
  - Low Zener Impedance
  - Low Regulation Factor
  - $V_Z$  – tolerance:  $\pm 5\%$
  - For Surface Mount Applications
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL rating 1

## Maximum Ratings

- Junction Temperature: 150°C
- Storage Temperature: -65°C to +175°C
- 1.5 Watt DC Power Dissipation ( $T_L \leq 75^\circ\text{C}$ )
- Thermal Resistance Junction to Lead: 50°C /W
- Forward Voltage @ 200mA: 1.5 Volts


**1.5 Watt  
Zener Diode  
5.1 to 51 Volts**

## DO-214AC (SMAJ)(LEAD FRAME)

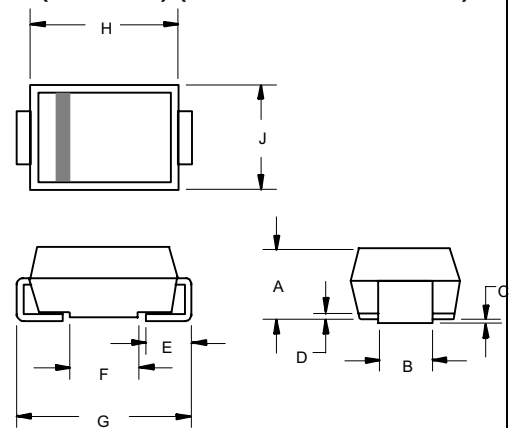

DIM	DIMENSIONS				NOTE
	INCHES		MM		
A	.079	.096	2.00	2.44	
B	.050	.064	1.27	1.63	
C	.002	.008	.05	.20	
D	---	.02	---	.51	
E	.030	.060	.76	1.52	
F	.065	.091	1.65	2.32	
G	.189	.220	4.80	5.59	
H	.157	.181	4.00	4.60	
J	.090	.115	2.25	2.92	

### SUGGESTED SOLDER PAD LAYOUT

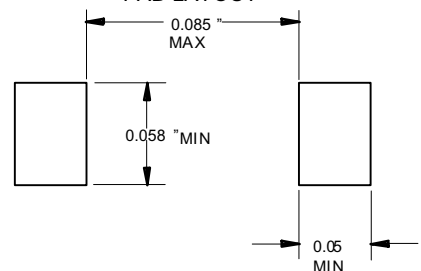

Note: 1. High Temperature Solder Exemptions Applied, see EU Directive Annex 7.

# SMAJ5918B THRU SMAJ5942B

## ELECTRICAL CHARACTERISTICS @25°C

MCC PART NUMBER	ZENER VOLTAGE $V_z$ (1)	TEST CURRENT $I_{zT}$	MAXIMUM DYNAMIC IMPEDANCE $Z_{zT}$ @ $I_{zT}$	KNEE CURRENT $I_{zk}$	KNEE IMPEDANCE $Z_{zk}$	MAXIMUM REVERSE CURRENT $I_R$	REVERSE VOLTAGE $V_R$	DEVICE MARKING
	VOLTS	mA	OHMS	mA	OHMS	$\mu$ A	VOLTS	
SMAJ5918B	5.1	73.5	4.0	1.0	350	2.5	2.0	18B
SMAJ5919B	5.6	66.9	2.0	1.0	250	2.5	3.0	19B
SMAJ5920B	6.2	60.5	2.0	1.0	200	2.5	4.0	20B
SMAJ5921B	6.8	55.1	2.5	1.0	200	2.5	5.2	21B
SMAJ5922B	7.5	50.0	3.0	0.5	400	2.5	6.0	22B
SMAJ5923B	8.2	45.7	3.5	0.5	400	2.5	6.5	23B
SMAJ5924B	9.1	41.2	4.0	0.5	500	2.5	7.0	24B
SMAJ5925B	10	37.5	4.5	0.25	500	0.5	8.0	25B
SMAJ5926B	11	34.1	5.5	0.25	550	0.5	8.4	26B
SMAJ5927B	12	31.2	6.5	0.25	550	0.5	9.1	27B
SMAJ5928B	13	28.8	7.0	0.25	550	0.5	9.9	28B
SMAJ5929B	15	25.0	9.0	0.25	600	0.5	11.4	29B
SMAJ5930B	16	23.4	10.0	0.25	600	0.5	12.2	30B
SMAJ5931B	18	20.8	12.0	0.25	650	0.5	13.7	31B
SMAJ5932B	20	18.7	14.0	0.25	650	0.5	15.2	31B
SMAJ5933B	22	17.0	17.5	0.25	650	0.5	16.7	33B
SMAJ5934B	24	15.6	19.0	0.25	700	0.5	18.2	34B
SMAJ5935B	27	13.9	23.0	0.25	700	0.5	20.6	35B
SMAJ5936B	30	12.5	28.0	0.25	750	0.5	22.8	36B
SMAJ5937B	33	11.4	33.0	0.25	800	0.5	25.1	37B
SMAJ5938B	36	10.4	38.0	0.25	850	0.5	27.4	38B
SMAJ5939B	39	9.6	45.0	0.25	900	0.5	29.7	39B
SMAJ5940B	43	8.7	53.0	0.25	950	0.5	32.7	40B
SMAJ5941B	47	8.0	67.0	0.25	1000	0.5	35.8	41B
SMAJ5942B	51	7.3	70.0	0.25	1100	0.5	38.8	42B

1) Based on DC-measurement at thermal equilibrium while maintaining the lead temperature( $T_L$ ) at 30°C, 9.5mm(3/8") from the diode body.

# SMAJ5918B THRU SMAJ5942B

## Characteristics ( $T_j=25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter
$V_Z$	Reverse zener voltage @ $I_{ZT}$
$I_{ZT}$	Reverse current
$Z_{ZT}$	Maximum zener impedance @ $I_{ZT}$
$I_{ZK}$	Reverse current
$Z_{ZK}$	Maximum zener impedance @ $I_{ZK}$
$I_R$	Reverse leakage current @ $V_R$
$V_R$	Breakdown voltage
$I_F$	Forward current
$V_F$	Forward voltage @ $I_F$

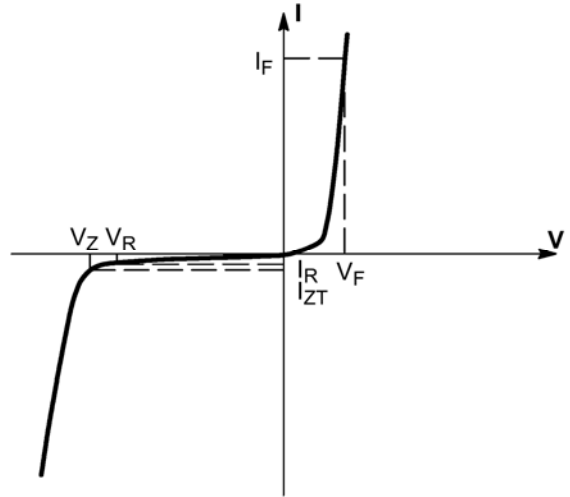


Figure 1. Zener voltage regulator

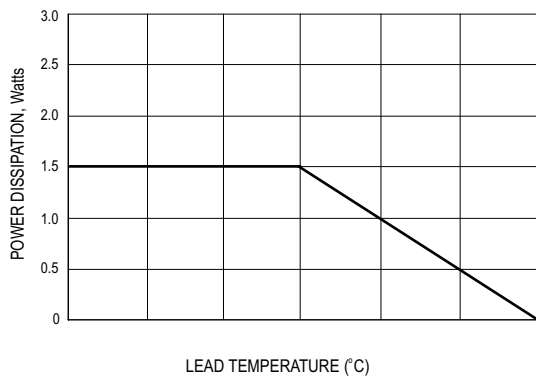


Figure 2. Steady state power derating

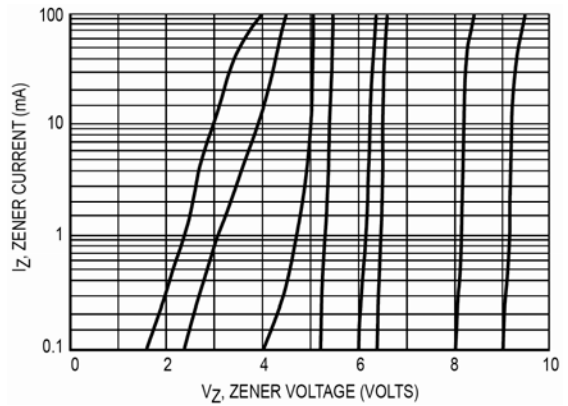


Figure 3.  $V_Z$  - 3.3 thru 10 volts

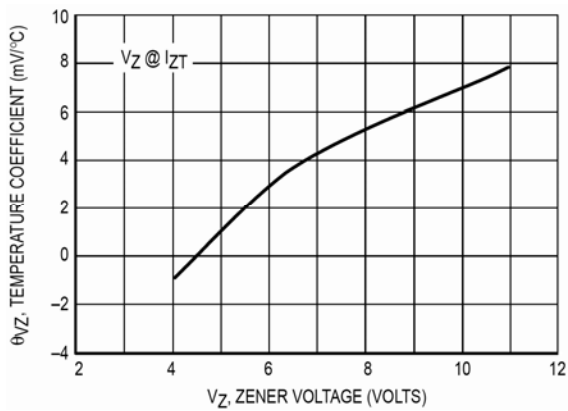


Figure 4. Zener voltage - 3.3 to 12 volts

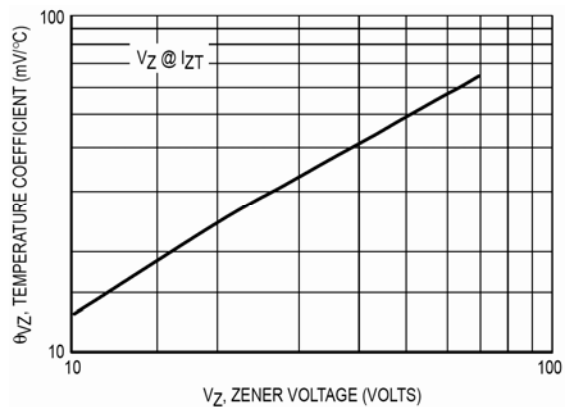


Figure 5. Zener voltage - 14 to 43 volts

# SMAJ5918B THRU SMAJ5942B

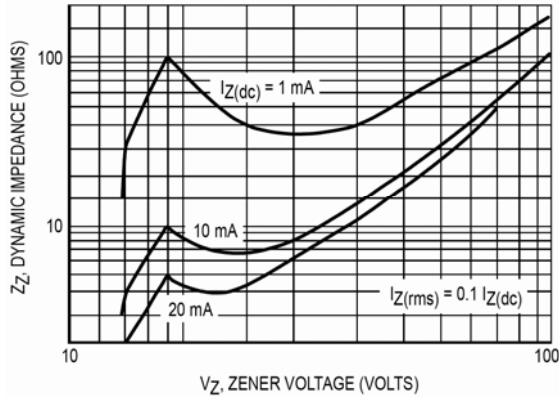


Figure 6. Effect of zener voltage

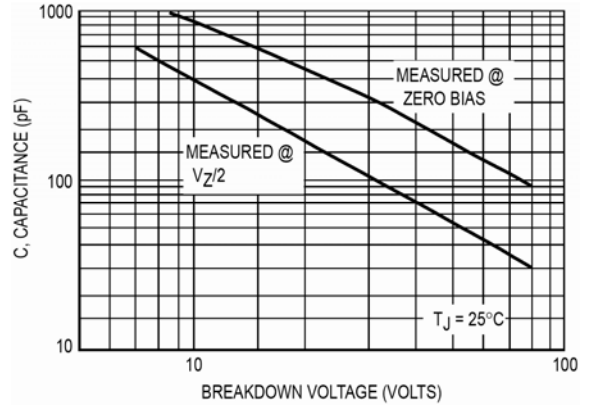


Figure 7. Capacitance curve

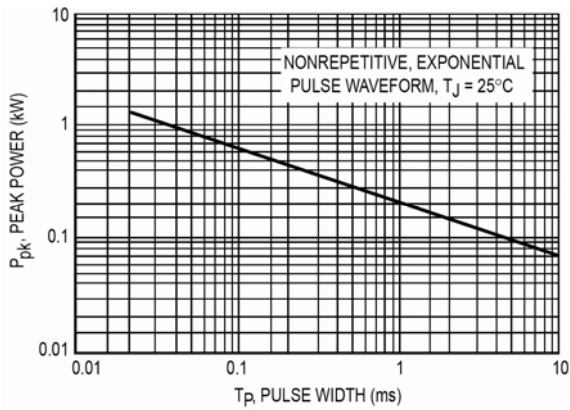


Figure 8. Typical pulse rating curve

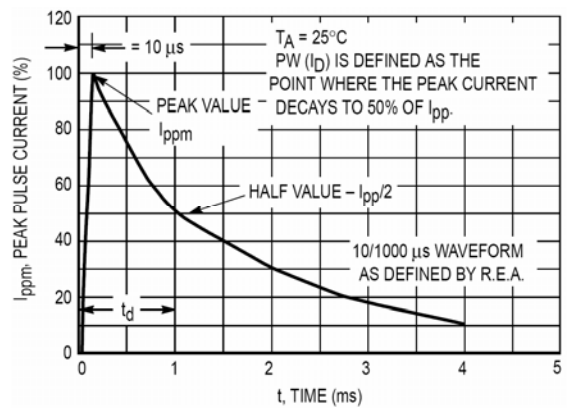


Figure 9. Pulse waveform

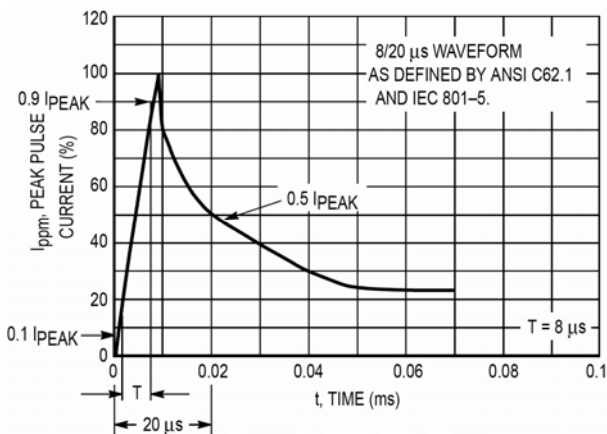


Figure 10. Pulse waveform

TM

## Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel;7.5Kpcs/Reel