

™

# ER3A-HT THRU ER3M-HT

## 3.0 Amp High Efficient Rectifiers 50 to 1000 Volts

### Features

- Lead Free Finish/Rohs Compliant (Note1) ("P" Suffix designates Compliant. See ordering information)
- High surge current capability
- High reliability
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL rating 1

### Maximum Ratings

- Operating Temperature: -55°C to +125°C
- Storage Temperature: -55°C to +150°C

MCC Part Number	Device Marking	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
ER3A-HT	ER3A	50V	35V	50V
ER3B-HT	ER3B	100V	70V	100V
ER3D-HT	ER3D	200V	140V	200V
ER3G-HT	ER3G	400V	280V	400V
ER3J-HT	ER3J	600V	420V	600V
ER3K-HT	ER3K	800V	560V	800V
ER3M-HT	ER3M	1000V	700V	1000V


### Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	$I_{F(AV)}$	3.0A	$T_A = 55^\circ\text{C}$
Peak Forward Surge Current	$I_{FSM}$	150A	8.3ms, half sine
Maximum Instantaneous Forward Voltage ER3A-HT~ER3D-HT ER3G-HT ER3J-HT~ER3M-HT	$V_F$	1.0V 1.3V 1.7V	$I_{FM} = 3.0A$ ; $T_A = 25^\circ\text{C}^*$
Maximum DC Reverse Current At Rated DC Blocking Voltage	$I_R$	10uA 200uA	$T_A = 25^\circ\text{C}$ $T_A = 100^\circ\text{C}$
Maximum Reverse Recovery Time ER3A-HT~ER3G-HT ER3J-HT~ER3M-HT	$T_{rr}$	50ns 75ns	$I_F=0.5A, I_R=1.0A$ $I_{RR}=0.25A$
Typical Junction Capacitance ER3A-HT~ER3G-HT ER3J-HT~ER3M-HT	$C_J$	80pF 50pF	Measured at 1.0MHz, $V_R=4.0V$

\*Pulse Test: Pulse Width 300µsec, Duty Cycle 1%


Note: 1. High Temperature Solder Exemptions Applied, see EU Directive Annex 7.

### DO-214AB (HSMC) (Round Lead)

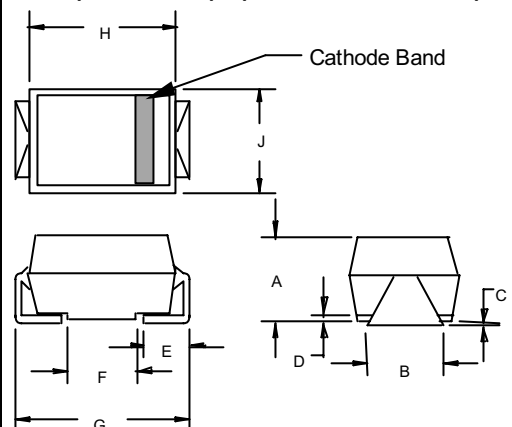

DIM	DIMENSIONS				NOTE
	INCHES		MM		
	MIN	MAX	MIN	MAX	
A	.200	.214	5.08	5.43	
B	.177	.203	4.70	5.30	
C	.002	.005	.05	.13	
D	—	.02	—	.51	
E	.047	.056	1.20	1.42	
F	.168	.179	4.27	4.55	
G	.309	.322	7.85	8.18	
H	.239	.243	6.08	6.18	
J	.234	.240	5.95	6.10	

### SUGGESTED SOLDER PAD LAYOUT

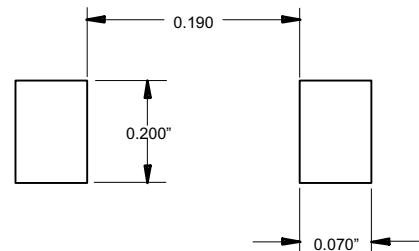

# ER3A-HT THRU ER3M-HT

## RATINGS AND CHARACTERISTIC CURVES

FIG.1- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM


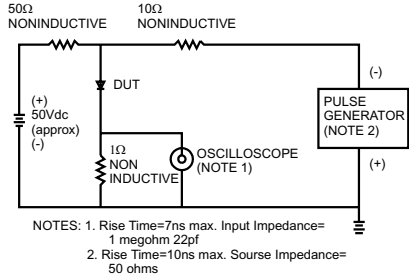


FIG.2- MAXIMUM AVERAGE FORWARD CURRENT DERATING




FIG.3- TYPICAL REVERSE CHARACTERISTICS

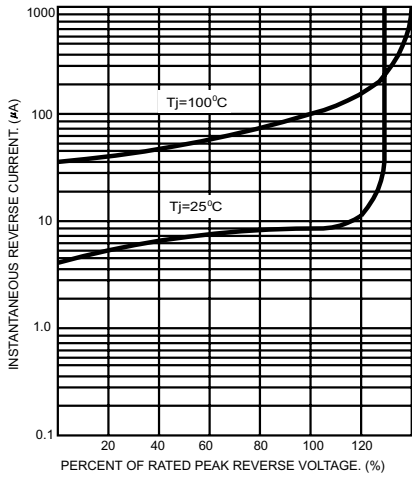


FIG.5- TYPICAL FORWARD CHARACTERISTICS

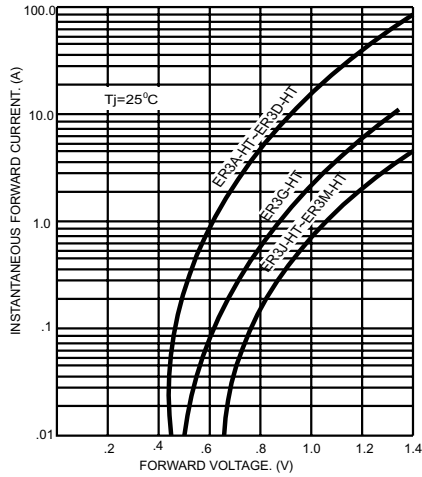


FIG.4- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT


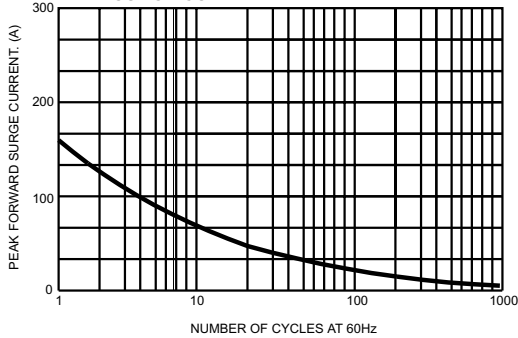


FIG.6- TYPICAL JUNCTION CAPACITANCE

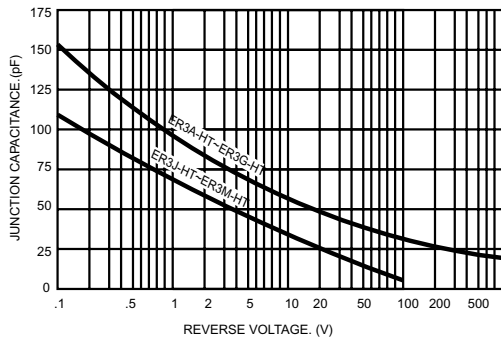

## Ordering Information

Device	Packing
(Part Number)P	Tape&Reel;1.5Kpcs/Reel