

™

BAS16TW MMBD4148TW

Features


- Power dissipation: 200mW ($T_{amb}=25^{\circ}C$)
- Collector current: 150mA

200mW Switching Diode

Maximum Ratings

- Operating Temperature: $-55^{\circ}C$ to $+150^{\circ}C$
- Storage Temperature: $-55^{\circ}C$ to $+150^{\circ}C$


SOT-363

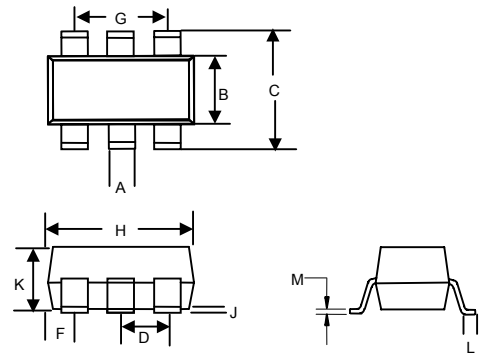

Electrical Characteristics @ 25°C Unless Otherwise Specified

Reverse Voltage	V_R	75V	$I_R=100 \mu A$
Peak Forward Current	I_F	150mA	
Maximum Instantaneous Forward Voltage	V_F	0.715V 0.855 1.0V 1.25V	$I_{FM} = 1mA;$ $I_{FM} = 10mA;$ $I_{FM} = 50mA;$ $I_{FM} = 150mA;$
Maximum DC Reverse Current At Rated DC Blocking Voltage	I_R	$1.0 \mu A$ $0.025 \mu A$	$V_R=75Volts$ $V_R=20Volts$
Diode Capacitance	C_D	2pF	Measured at 1.0MHz, $V_R=0V$
Reverse Recovery Time	T_{rr}	4ns	$I_F=I_R=10mA,$ $R_L = 100 OHM$ $I_{rr}=0.1I_R$

6 4

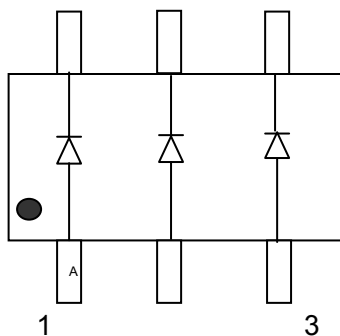

Marking: KA2

DIM	DIMENSIONS				NOTE
	INCHES		MM		
	MIN	MAX	MIN	MAX	
A	.004	.012	0.10	0.30	
B	.045	.053	1.15	1.35	
C	.079	.087	2.00	2.20	
D	.026		0.65Nominal		
F	.012	.016	0.30	0.40	
H	.071	.087	1.80	2.20	
J	---	.004	---	0.10	
K	.035	.039	0.90	1.00	
L	.010	.016	0.25	0.40	
M	.004	.016	0.10	0.25	