


TM

BAS21A/C/S


Features

- Power dissipation: 225mW ($T_{amb}=25^{\circ}C$)
- Forward current: 200mA
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1




BAS21A

Marking: JS2



BAS21C

Marking: JS3






BAS21S

Marking: JS4

225mW 250Volt Switching Diode

SOT-23



Maximum Ratings

- Operating Temperature: $-55^{\circ}C$ to $+150^{\circ}C$
- Storage Temperature: $-55^{\circ}C$ to $+150^{\circ}C$


Electrical Characteristics @ 25°C Unless Otherwise Specified

Reverse Breakdown Voltage	$V_{(BR)}$	250V	$I_R=100 \mu A$
Maximum Instantaneous Forward Voltage	V_F	1100mV	$I_{FM} = 100mA$; $T_J = 25^{\circ}C$
Maximum DC Reverse Current At Rated DC Blocking Voltage	I_R	1 μA	$V_R=200Volts$ $T_J = 25^{\circ}C$
Diode Capacitance	C_D	5pF	Measured at 1.0MHz, $V_R=0V$
Reverse Recovery Time	T_{rr}	50nS	

DIMENSIONS

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.110	.120	2.80	3.04	
B	.083	.098	2.10	2.64	
C	.047	.055	1.20	1.40	
D	.035	.041	.89	1.03	
E	.070	.081	1.78	2.05	
F	.018	.024	.45	.60	
G	.0005	.0039	.013	.100	
H	.035	.044	.89	1.12	
J	.003	.007	.085	.180	
K	.015	.020	.37	.51	

Suggested Solder Pad Layout

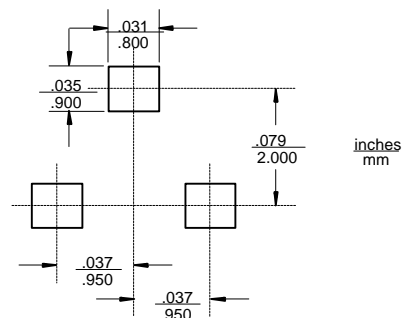

Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel;3Kpcs/Reel