

TM

CMP SH-3/3A/3C/3S

Features



- Low Current Leakage
- For Surface Mount Applications
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1

**350mW 30Volt
Switching Diode**

Maximum Ratings

- Operating Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C

SOT-23



Electrical Characteristics @ 25°C Unless Otherwise Specified


Reverse Voltage	V_R	30V	
Average Rectified Current	I_O	100mA	
Power Dissipation	P_{TOT}	350mW	
Maximum Instantaneous Forward Voltage	V_F	0.33V 0.45V 1.0V	$I_{FM} = 2mA;$ $I_{FM} = 15mA;$ $I_{FM} = 100mA;$
Maximum DC Reverse Current At Rated DC Blocking Voltage	I_R	500nA 100μA	$V_R=25Volts$ $T_J = 25^\circ C$ $T_J = 100^\circ C$
Typical Junction Capacitance	C_J	4pF	Measured at 1.0MHz, $V_R=0V$
Reverse Recovery Time	T_{rr}	4nS	$I_F = I_R = 10mA$ $I_{RR} = 1.0mA$ $R_L = 100\Omega$

*Pulse test: Pulse width 300 μsec, Duty cycle 2%


DIMENSIONS

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.110	.120	2.80	3.04	
B	.083	.098	2.10	2.64	
C	.047	.055	1.20	1.40	
D	.035	.041	.89	1.03	
E	.070	.081	1.78	2.05	
F	.018	.024	.45	.60	
G	.0005	.0039	.013	.100	
H	.035	.044	.89	1.12	
J	.003	.007	.085	.180	
K	.015	.020	.37	.51	


Suggested Solder Pad Layout

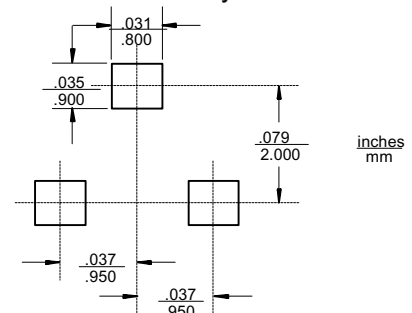


CMP SH-3/3A/3C/3S




CMP SH-3 Marking: D95



CMP SH-3A Marking: DB1



CMP SH-3C Marking: DB2



CMP SH-3S Marking: DA5

Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel;3Kpcs/Reel