


EDCON-COMPONENTS




SPECIFICATION:

Current Rating: DC12V / 50mA
 Insulator Resistance: 100 Mega Ω min.
 Contact Resistance: 100 m Ω max.
 Travel: 0,25 / +/- 0,1mm
 Operating Temperature: -40°C to +105°C
 Lifetime: look order code
 Operating Force: look order code


Common Specifications

Life Test	50/80 Cycles / Min with 5VDC 5mA Resistive load Cycles of Operation: As per individual Specifications
Dry Heat Proof	80°C +/- 2°C for 96hours after Test Kept in Normal Condition for 30Min.
Moisture Resistance	60°C +/- 2°C 90~95% RH for 96 Hours After Test, Kept in Normal Condition for 30 Minutes
Cold Proof	-30°C for 96 Hours After Test Kept in Normal Condition for 30 Minutes.
Operating Force	If refers to the maximum load at the time of switching over of the contacts. (Point A in the figure)
Travel	This refers to the state of repeating the contact opening or closing momentarily at the time of the changeover of the switch to ON or OFF. Longer duration of this state


Drawing

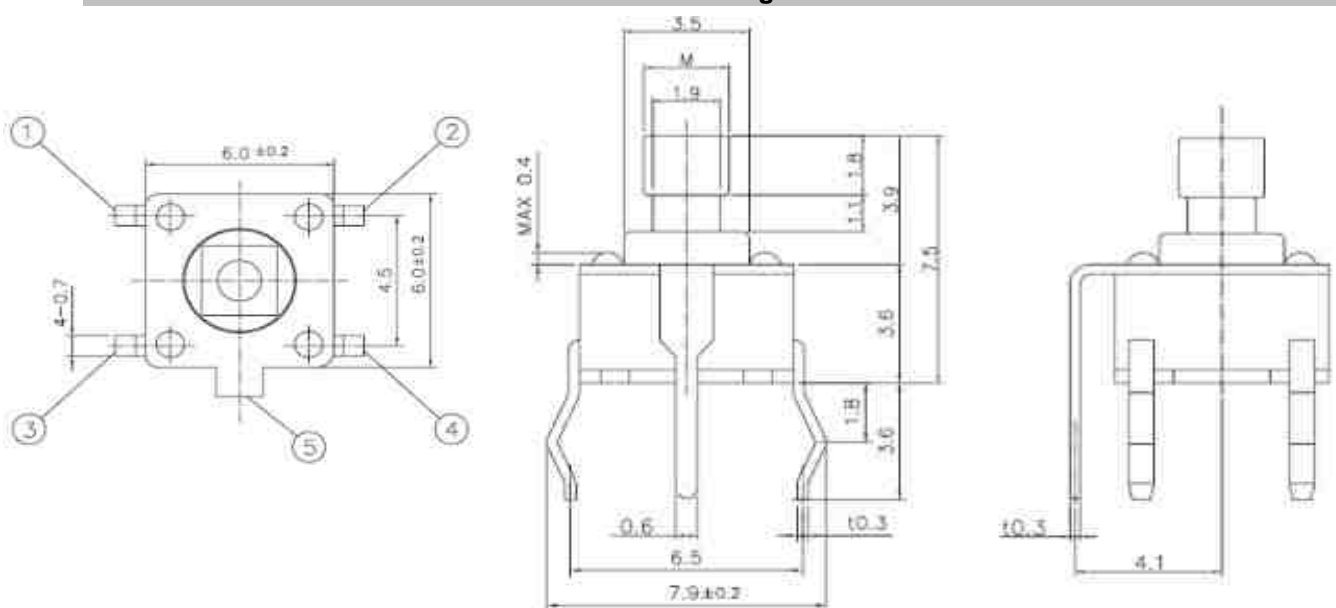

PCB Layout

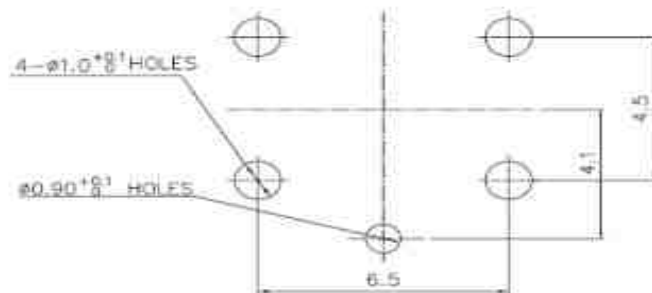

Circuit Diagram




TACT SWITCH THT
6,0x6,0mm

Part No.: **Q11024**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.07.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	Customer:

EDCON-COMPONENTS




Ordering Informations

Serie	Total length (l)	Knob Size	Operating Force	Grounding Tab	Electrical life	Function	ROHS	Packing		
Q11024	075	A	101	A	803	N	R	BU102		
	075= 7,5mm	A= 2,4x2,4mm	101 = 100gr	A= 4,1mm	803= 80000 cycles of 100gr. O-Force	N= No function	N= non ROHS	BU= Bulk Ware 1000PCS		
		B= 2,8x2,8mm	131 = 130gr	B= 5,0mm	803= 80000 cycles of 130gr. O-Force		R= ROHS conform			
			161= 160gr		803= 80000 cycles of 180gr. O-Force					
			251= 250gr		503= 50000 cycles of 250gr. O-Force					
			351= 350gr		503= 50000 cycles of 350gr. O-Force					
			501= 500gr		303= 30000 cycles of 500gr. O-Force					


TACT SWITCH THT 6,0x6,0mm	
Part No.:	Q11024
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.07.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 3



Soldering Profile for Lead Free Soldering

Classification Reflow Profile (JEDEC J-STD-020C)

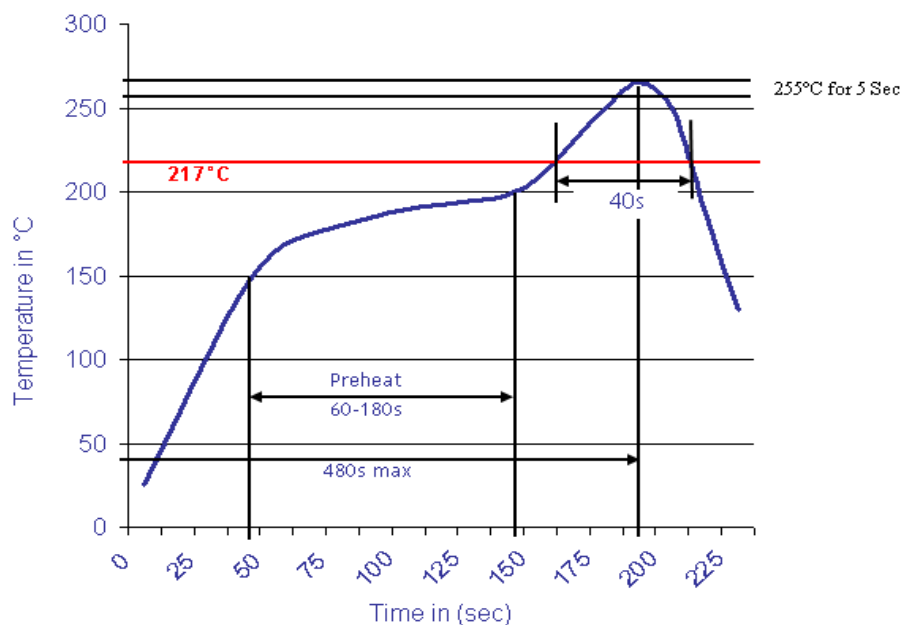

**TACT SWITCH THT
6,0x6,0mm**

Part No.: **Q11024**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.07.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	Customer: