


# EDCON-COMPONENTS




## SPECIFICATION:

Current Rating:	DC12V / 50mA
Insulator Resistance:	100 Mega $\Omega$ min.
Contact Resistance:	100 m $\Omega$ max.
Travel:	0,25 / +/- 0,1mm
Operating Temperature:	-.40°C to +105°C
Lifetime:	look order code
Operating Force:	look order code


## Common Specifications

Life Test	50/80 Cycles / Min with 5VDC 5mA Resistive load Cycles of Operation: As per individual Specifications
Dry Heat Proof	80°C +/- 2°C for 96hours after Test Kept in Normal Condition for 30Min.
Moisture Resistance	60°C +/- 2°C 90~95% RH for 96 Hours After Test, Kept in Normal Condition for 30 Minutes
Cold Proof	. 30°C for 96 Hours After Test Kept in Normal Condition for 30 Minutes.
Operating Force	If refers to the maximum load at the time of switching over of the contacts. (Point A in the figure)
Travel	This refers to the state of repeating the contact opening or closing momentarily at the time of the changeover of the switch to ON or OFF. Longer duration of this state


## Drawing

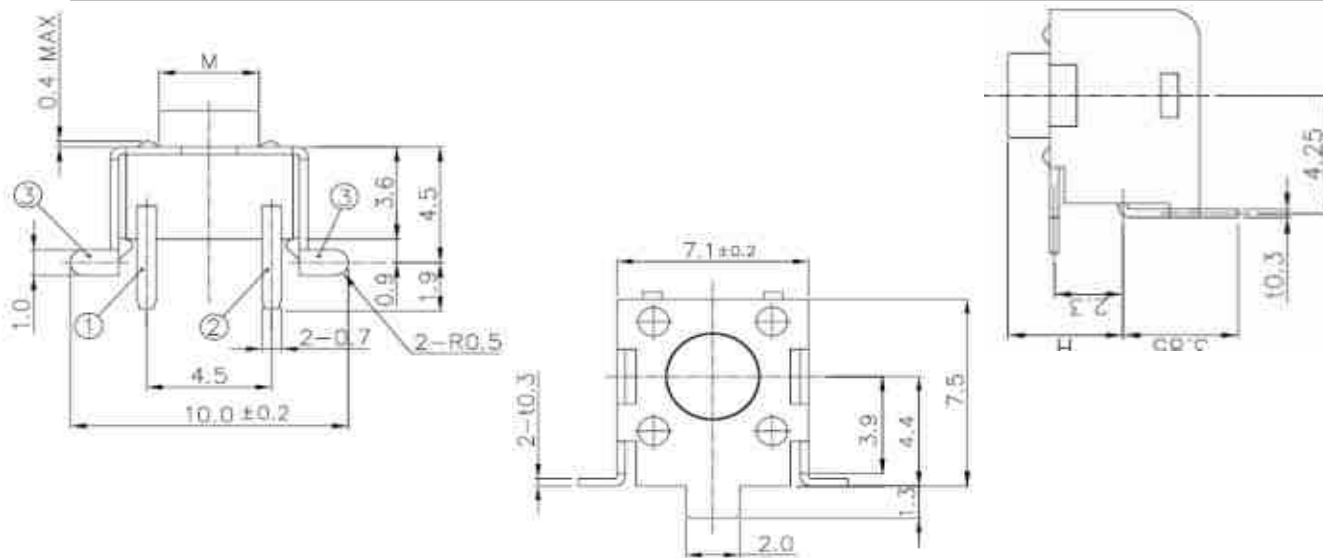

## PCB Layout

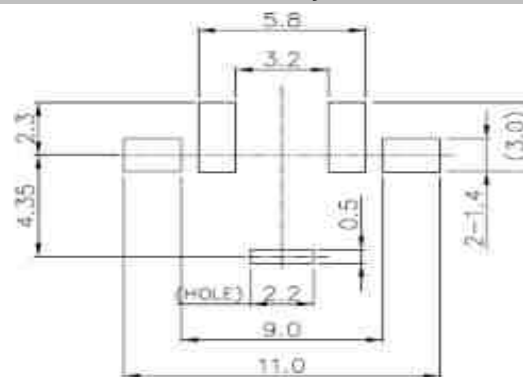

## Circuit Diagram




## SMT TACT SWITCH

Part No.: **Q12026**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.07.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 3

# EDCON-COMPONENTS




## Ordering Informations

Serie	Total length	Function	Operating Force	Function	Electrical life	Function	ROHS	Packing		
<b>Q12026</b>	<b>031</b>	<b>N</b>	<b>101</b>	<b>N</b>	<b>803</b>	<b>N</b>	<b>R</b>	<b>BU102</b>		
	031= 3,15mm	N= No function	101 = 100gr	N= No function	803= 80000 cycles of 100gr. O-Force	N= No function	N= non ROHS	BU= Bulk Ware 1000PCS		
	038= 3,85mm		131 = 130gr		803= 80000 cycles of 130gr. O-Force		R= ROHS conform			
	058= 5,85mm		161= 160gr		803= 80000 cycles of 160gr. O-Force					
	061= 6,15mm		251= 250gr		503= 50000 cycles of 250gr. O-Force					
	068= 6,85mm		351= 350gr		503= 50000 cycles of 350gr. O-Force					
	073= 7,35mm		501= 500gr		303= 30000 cycles of 500gr. O-Force					
	083= 8,35mm									
	085= 8,55mm									
	096= 9,65mm									
	113= 11,35mm	169= 16,95mm								
	118= 11,85mm	158= 15,85mm								
	123= 12,35mm	151= 15,15mm								

<b>SMT TACT SWITCH</b>	
Part No.:	<b>Q12026</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.07.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 3



**Soldering Profile for Lead Free Soldering**

**Classification Reflow Profile (JEDEC J-STD-020C)**



**SMT TACT SWITCH**

Part No.: **Q12026**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.07.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	