


# EDCON-COMPONENTS




## SPECIFICATION:

Current Rating:	DC12V / 50mA
Insulator Resistance:	100 Mega $\Omega$ min.
Contact Resistance:	100 m $\Omega$ max.
Travel:	0,25 / +/- 0,1mm
Operating Temperature:	.-40°C to +105°C
Lifetime:	look order code
Operating Force:	look order code


## Common Specifications

Life Test	50/80 Cycles / Min with 5VDC 5mA Resistive load Cycles of Operation: As per individuall Specifications
Dry Heat Proof	80°C +/- 2°C for 96hours after Test Kept in Normal Condition for 30Min.
Moisture Resistance	60°C +/- 2°C 90~95% RH for 96 Hours After Test, Kept in Normal Condition for 30 Minutes
Cold Proof	. 30°C for 96 Hours After Test Kept in Normal Condition for 30 Minutes.
Operating Force	If refers to the maximum load at the time of switching over of the contacts. (Point A in the figure)
Travel	This refers to the state of repeating the contact opening or closing momentarily at the time of the changeover of the switch to ON or OFF. Longer duration of this state


## Drawing

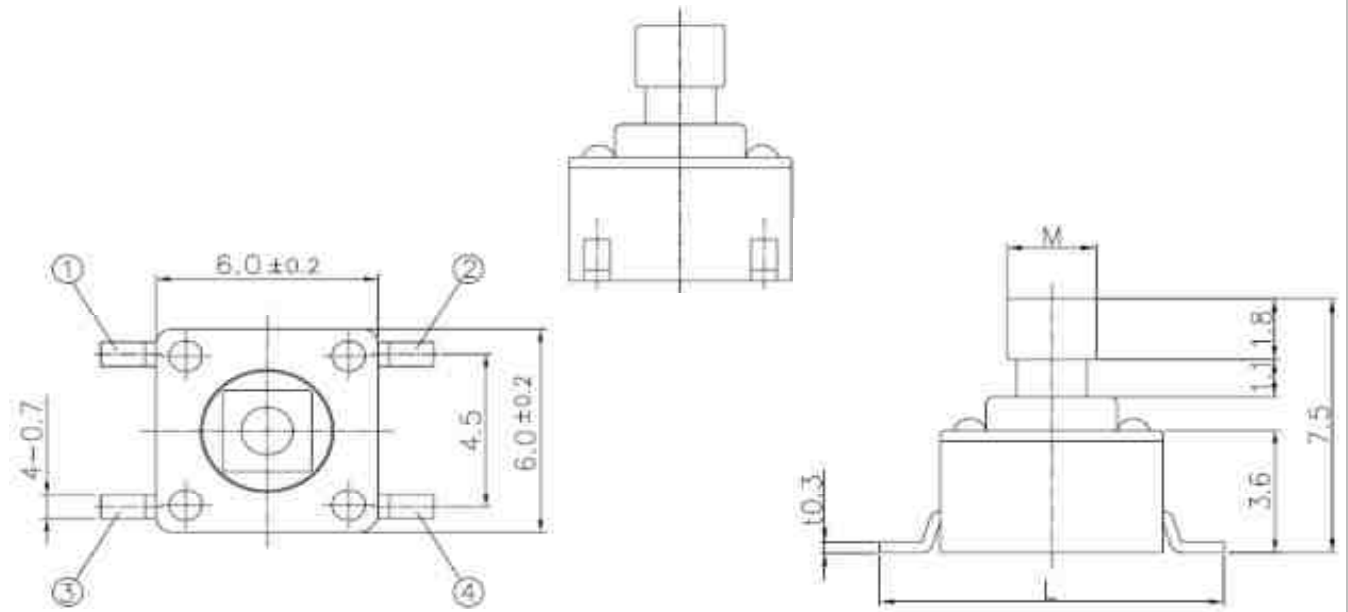

## PCB Layout

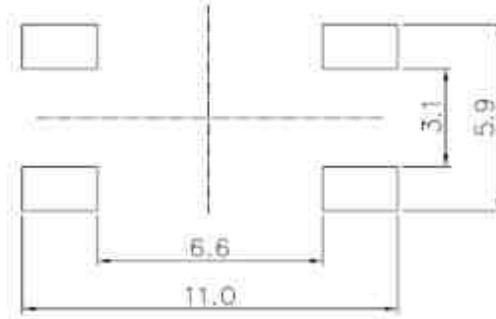

## Circuit Diagramm



## SMT TACT SWITCH

Part No.: **Q12037**

Customer:


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	29.08.2021
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 3

[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)

Copyright by S.Tiede

# EDCON-COMPONENTS



## Ordering Informations


Serie	Total length	Knob Dim. (M)	Operating Force	Lead Length (L)	Electrical life	Function	ROHS	Packing		
<b>Q12037</b>	-	<b>075</b>	<b>A</b>	<b>101</b>	<b>A</b>	<b>803</b>	<b>N</b>	<b>R</b>	<b>TR</b>	
	075= 7,5mm	A= 2,4x2,4mm	101 = 100gr	A= L= 8mm	803= 1000000 cycles by 100gr. O-Force	N= No function	N= non ROHS	TR= Tape / Reel		
		B= 2,8x2,8mm	131 = 130gr	B= L= 9mm	803= 1000000 cycles by 130gr. O-Force		R= ROHS conform			
			161 = 160gr		803= 1000000 cycles by 160gr. O-Force					
			251 = 250gr		503= 500000 cycles by 250gr. O-Force					
			351 = 350gr		503= 300000 cycles by 350gr. O-Force					
			501 = 500gr		303= 100000 cycles by 500gr. O-Force					

### SMT TACT SWITCH

Part No.: **Q12037**


Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	29.08.2021
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 3	



## Soldering Profile for Lead Free Soldering

### Classification Reflow Profile (JEDEC J-STD-020C)

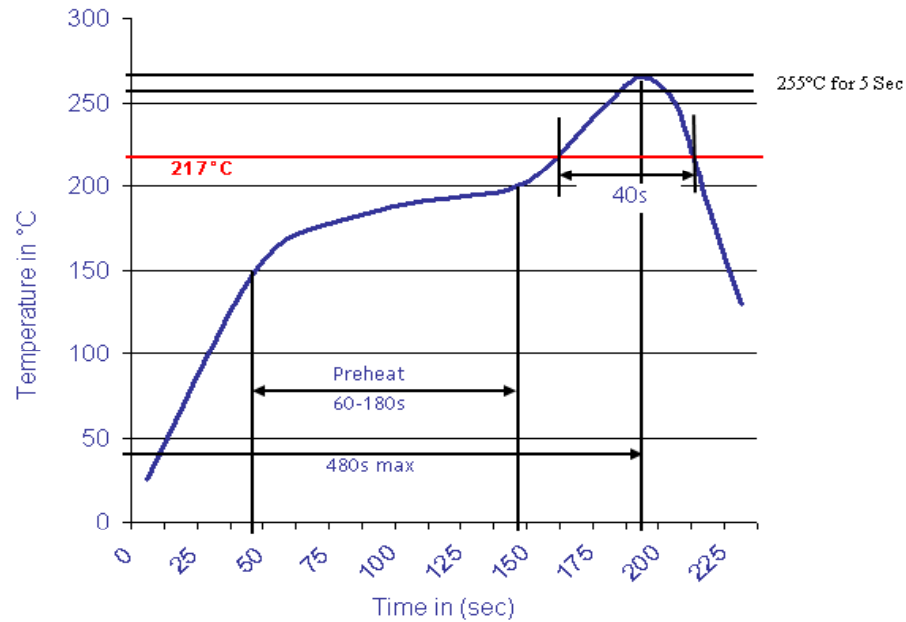

## SMT TACT SWITCH

Part No.: **Q12037**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	29.08.2021
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	