



EDCON-COMPONENTS



Drawing

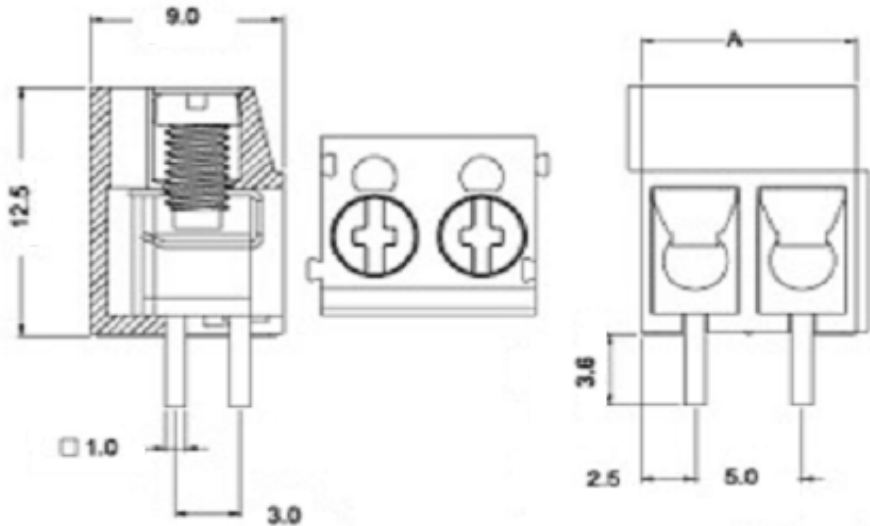

P.C.B. Layout



	A [mm]
2P	10.0
3P	15.0

Specification

Electrical

Wire range 26-16 AWG

Mechanical

Ambient temperature -40°C ~ +105°C
Screw, Torque M3, 0.45Nm (4.0lb-In.)

Dimensions

Pitch 5.00mm
Poles 2P + 3P

Material

Housing PA66 (UL94V-0)
Pin header Brass, Tin-plated
Screw steel, Zinc-plated
Wire guard Phosphor Bronze, Tin plated



Certification



Wire Protector Terminal Block /
Pitch 5.00mm

Part No.: A12L039

Customer:

DRW:	Bill	CHKD	Lord	MATL:	Jimmy	TOLERANCE	Sam	DATE	14.03.2009
APPD:	Louis			FINISH	Georg		Sheet No.		1 from 3

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS




Ordering Informations

Serie	-	No. of Pole	Body-Color	wire protector	Screw	-	Customer Request
A12L039	-	XX	XX	X	X	-	X


XX = total	WH - white	1 - with wire protector	A - Slotted screw
02	GN - green		
03	BL - blue (standard)	2 - without wire protector	B - Cross-slotted screw (standard)



PG - Phoenix Green
OR - orange
GR - gray
BK - black
LG - light gray



wire protector



without wire protector



Certification



Wire Protector Terminal Block /
Pitch 5.00mm

Part No.: A12L039

DRW:	Bill	CHKD	Lord	MATL:	Jimmy	TOLERANCE	Sam	DATE	14.03.2009
APPD:	Louis			FINISH	Georg			Sheet No.	2 from 3

Customer:


www.edcon-components.com

email: info@edcon-components.com



Soldering - Profil

Classification Reflow Profile (JEDEC J-STD-020C)

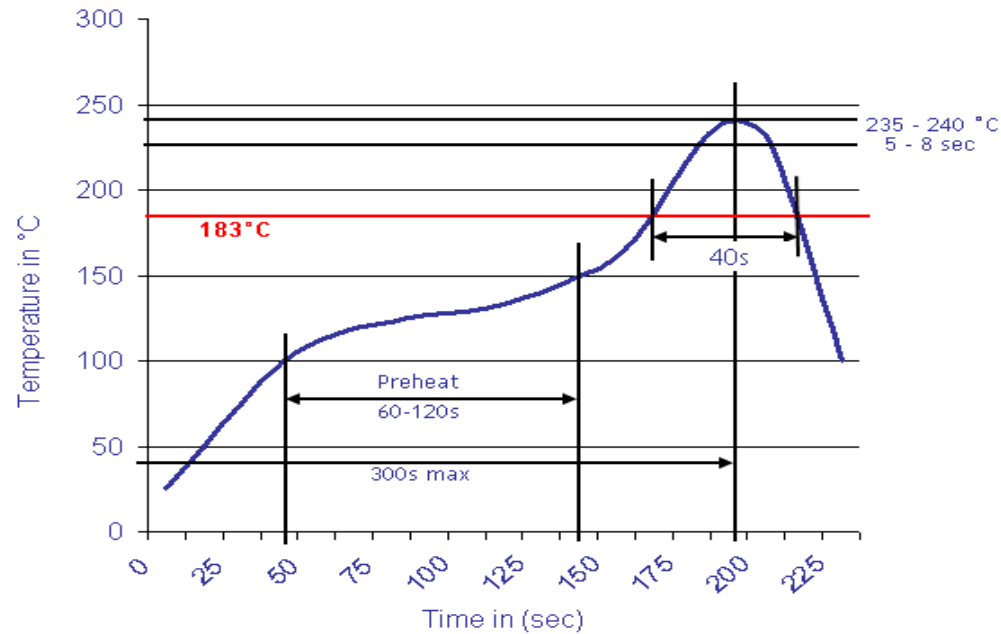

Wire Protector Terminal Block /
Pitch 5.00mm

Part No.: A12L039

DRW:	Bill	CHKD	Lord	MATL:	Jimmy	TOLERANCE	Sam	DATE	14.03.2009
APPD:	Louis			FINISH	Georg		Sheet No.	3 from 3	

Customer: