



Technical Specification

Insulator Material: PBT + 15% GF UL94V-0
 Contact Resistance: 30m Ohm max.
 Insulator Resistance: 5000 M Ohm max.
 Temperature Rating: -55°C ~ +105°C
 Contact Material: Beryllium Copper
 Contact: Tin Plated
 Durability: 10 Cycles min.
 Application for: Coin Type
 Battery Dimension: D= 24,0mm / T=5,0mm

Ordering Information

Serie	Contact Material	Contact Plating	ROHS	Packing		
-------	------------------	-----------------	------	---------	--	--

B23017	PB	TN	R	TY		
---------------	-----------	-----------	----------	-----------	--	--

PB= Phosphor Bronze	TN= Tin plated	N= Non ROHS	TY= Tray
		R= ROHS Conform	




Battery Coin Cell Holder	
Part No.:	B23017
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	12.03.2011
APPD:	Join			FINISH	Shieh	Sheet	1 from 3



Technical Dimensions

PCB Layout

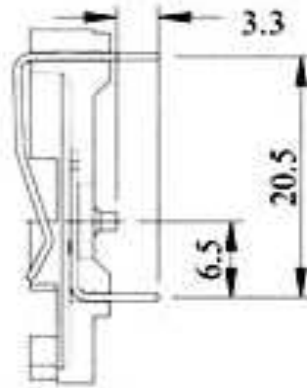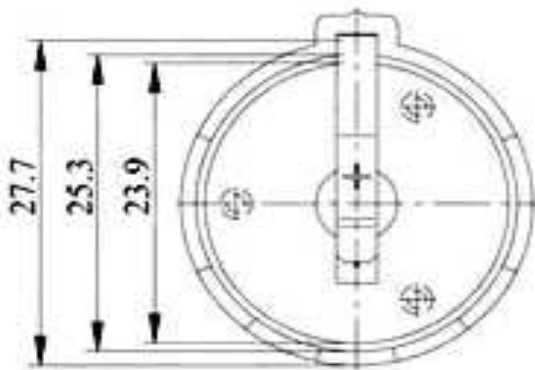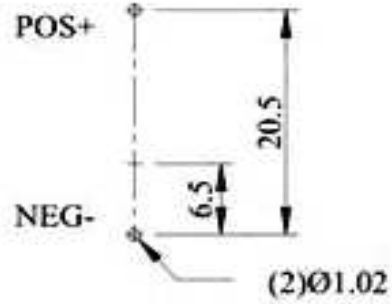


Battery Coin Cell Holder	
Part No.:	B23017
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	12.03.2011
APPD:	Join			FINISH	Shieh	Sheet	2 from 3



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

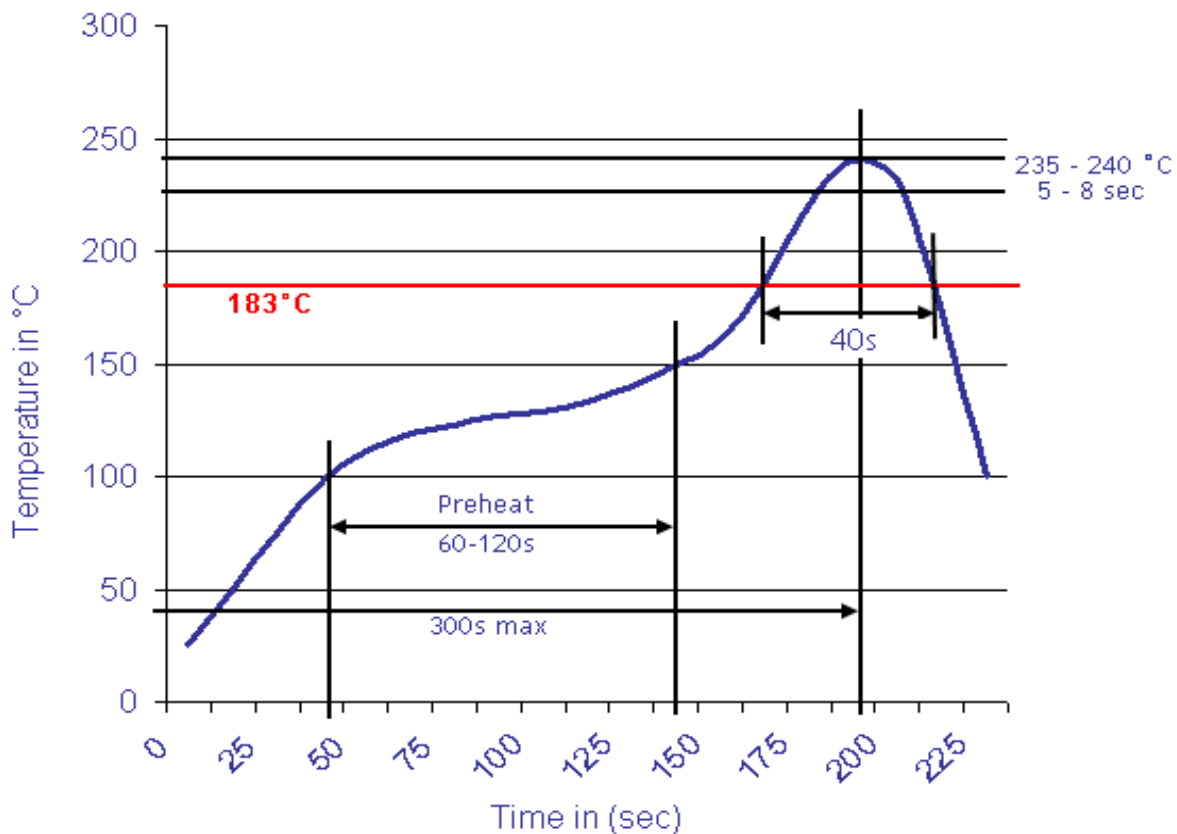

Battery Coin Cell Holder

Part No.: **B23017**

Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	12.03.2011
APPD:	Join			FINISH	Shieh	Sheet	3 from 3