




Specification

L (min)	N1=N2	2.2mH
SRF (min)	N1=N2	45mΩ
Current (max)		6A

Technical Drawing

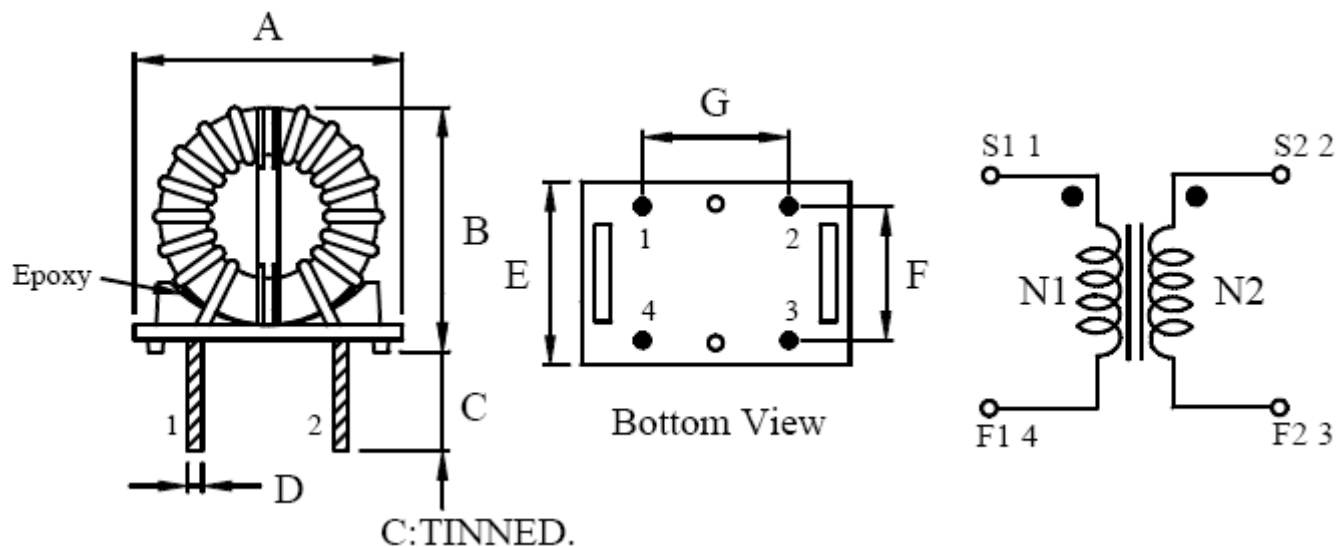

A	23.0 max	C	5.0 ±1.0	E	15.0 ±0.5	G	12.0 ±0.5
B	22.5 max	D	0.7 ±0.1	F	11.0 ±0.5	---	---

Odering Information

Serie	-	Tolerance	ROHS	Packing	
-------	---	-----------	------	---------	--

F13001	-	J	R	TY	
--------	---	---	---	----	--

EDCON	-	J = 5%	R = ROHS conform	TY = Tray Packing
Serie		K = 10%		
		L = 15%	N = NON ROHS con.	
		M = 20%		
		N = 30%		

Toroidal Coil Inductors
 Part No.: **F13001**
 Customer:

DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	22.11.2010
APPD:	Ping			FINISH	Hui	Sheet	1 from 1