





## Drawing

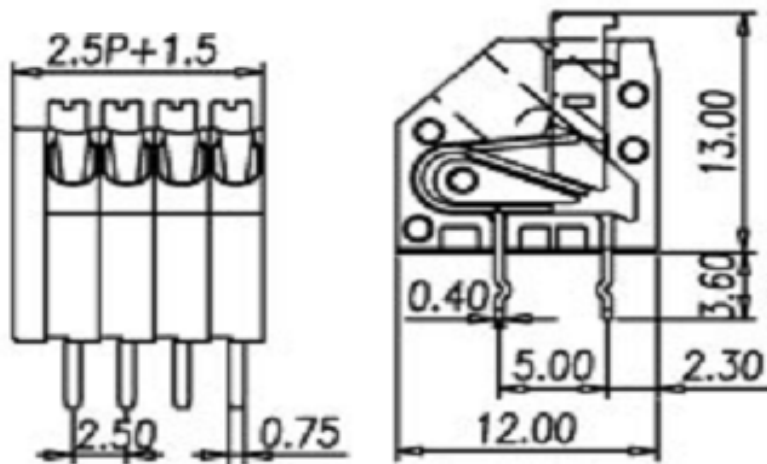

## P.C.B. Layout

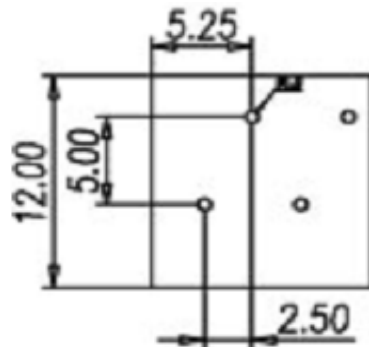

## Specifications

### APPROVAL

#### Electrical

Standard  
Rated voltage  
Rated current  
Wire range

UL	IEC
300V	250V
2A	2A
22-20 AWG	0.5mm <sup>2</sup>

#### Mechanical

Temperature range  
Strip length

-40°C ~ +105°C  
7.5 ~ 8.5mm

#### Dimensions

Pitch  
Poles

2.50mm  
2P - 25P

#### Material

Housing  
Pin header  
Wire guard

Nylon PA66 (UL94V-0)  
Brass, Tin plated  
Stainless steel



### Certification



Screwless Terminal Block

Pitch 2.50mm

Part No.: **A11E016**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	25.09.2009	Customer:
APPD:	Schumi			FINISH	Jamy			Sheet No.	1 from 3	



## Ordering Informations

Serie	-	No. of Pole	Body-Color	-	Customer Request
A11E016	-	XX	XX	-	X

XX = total	<b>WH</b> - white
02	<b>GN</b> - green
...	<b>GR</b> - gray
25	<b>(standard)</b>
	<b>PG</b> - Phoenix Green
	<b>OR</b> - orange
	<b>BK</b> - black
	<b>BL</b> - blue
	<b>LG</b> - light gray



**Certification**



Screwless Terminal Block  
Pitch 2.50mm


Part No.: **A11E016**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	25.09.2009	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 3		



## Soldering - Profil

### Classification Reflow Profile (JEDEC J-STD-020C)

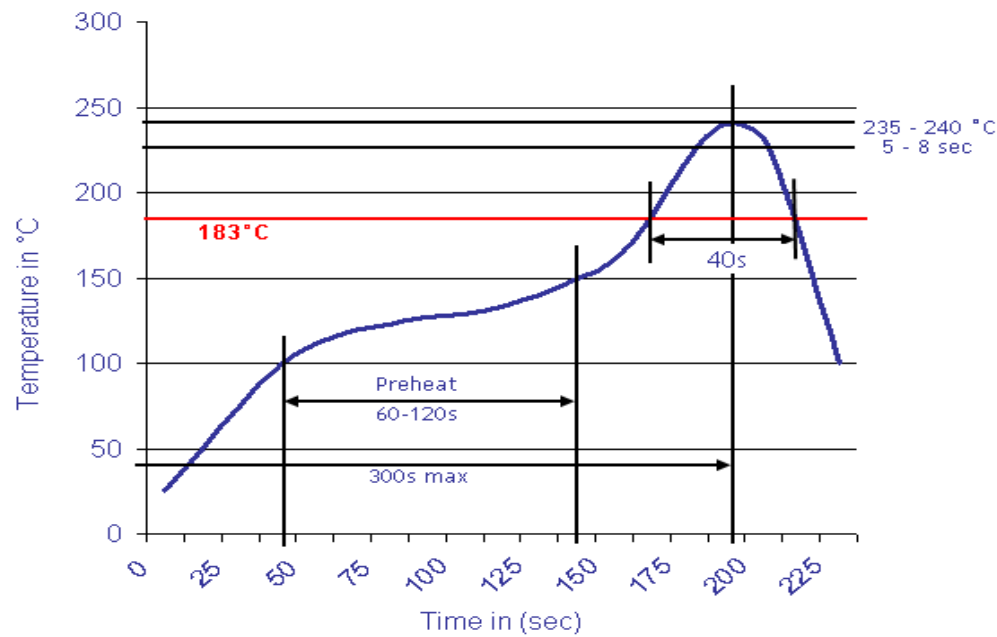

Screwless Terminal Block  
Pitch 2.50mm

Part No.: **A11E016**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	25.09.2009	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3		

