



R47006-025

Features:

Size 0603
Lead Free and compliant with the European Union
Fast tripping resettable circuit protection
Surface mount packaging for automated assembly
Operating Temperature: -40°C ~ +85°C

Technical Specifications:

I_H Hold current maximum current device will pass without interruption in 20° C still air unless

I_T Trip current: minimum current that will switch the device from low resistance, Resistance in 20°C still unless otherwise specified.

I_{max} Maximum current device can VMAXIMAX 100 vcycles --- NO arcing or burning.

V_{max} Maximum Voltage device can withstand without damage at rated current.

P_d power dissipated from device when in the tripped state in 20°C still air unless otherwise specified.

R_{min} Minimum resistance of device as supplied at 20°C unless otherwise specified.

R₁ max. Maximum device resistance in the nonstripped state 1 hour post reflow.

Thermal Derating chart-I H (A)

Range	Maximum ambient operating temperature (°C)								
	.-40	.-20	0	23	40	50	60	70	85
250mA	0,32	0,29	0,27	0,25	0,21	0,18	0,16	0,14	0,10

Approval:



SMT POLY FUSE SIZE 0603

Part No.: **R47006-025**

Customer:

DRW:	Lexua	CHKD	Wilson	MATL:	ChuChu	DATE	25.02.2011
APPD:	Jimmy			FINISH	Josy	Sheet	1 from 3

Copyright by EDCON-COMPONENTS H.Schmitt 11.6.2009


www.edcon-components.com

[email:info@edcon-components.com](mailto:info@edcon-components.com)



Technical Drawing and Informations

Dimensions

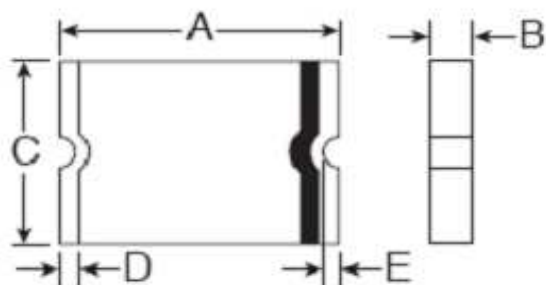


A (mm)		B (mm)		C (mm)		D (mm)		E (mm)	
Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
1,40	1,80	0,60	1,00	0,40	0,75	0,15	0,50	---	0,40

Performance Rating:

Range	ICH	IT	V max	I m ax	Pd typ	Maximum Time to Trip		Resistance:		
	(A)	(A)	(V DC)	(A)	(W)	Current	Time	Rmin	Rmax	R1max
	(A)	(A)	(V DC)	(A)	(W)	(A)	(Sec.)	(Ω)	(Ω)	(Ω)
250mA	0,2	0,55	9,0	40,0	0,5	8,0	0,08	0,50		3,00

PAD Layout

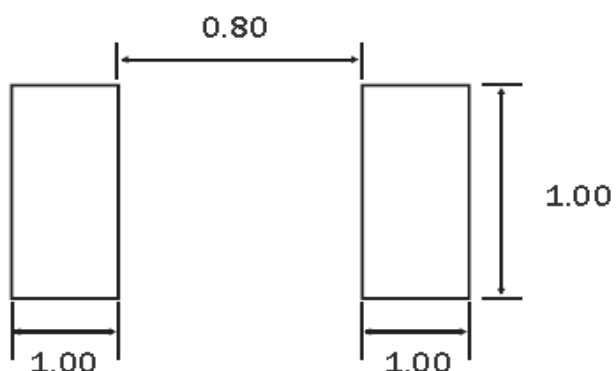

SMT POLY FUSE SIZE 0603

Part No.: **R47006-025**

Customer:

DRW:	Lexua	CHKD	Wilson	MATL:	ChuChu	DATE	25.02.2011
APPD:	Jimmy			FINISH	Josy	Sheet	2 from 3

Copyright by EDCON-COMPONENTS H.Schmitt 11.6.2009


www.edcon-components.com

email:info@edcon-components.com




Soldering Information

Lead Solder Performance

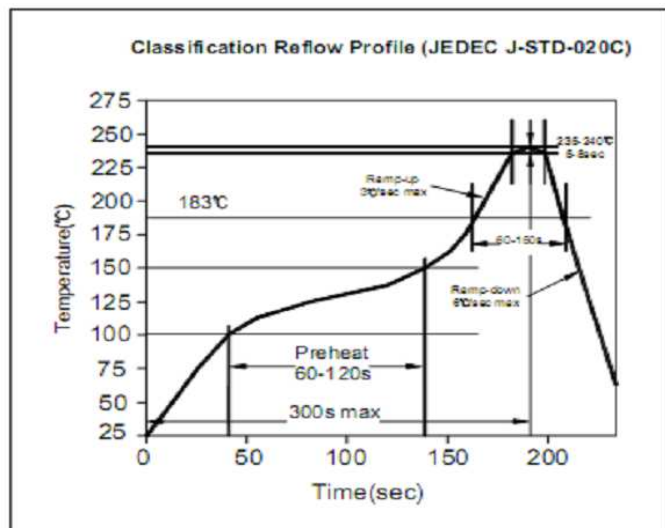

Lead free Solder Performance

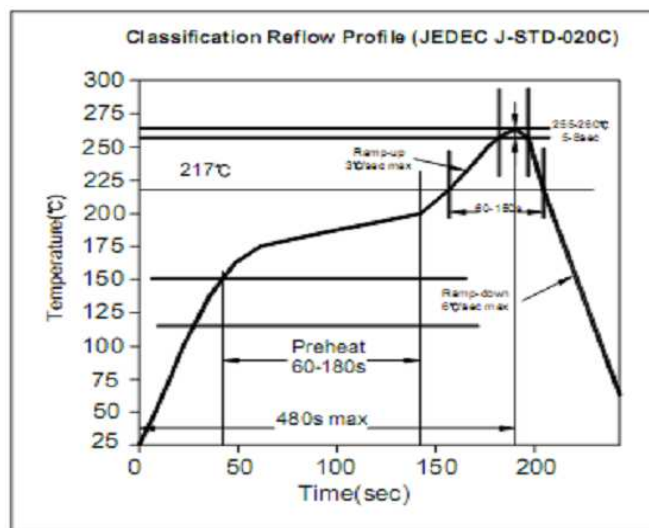

Ordering Informations:

Item-No. & Range	ROHS	Packing
------------------	------	---------

R47006-025	R	TR
-------------------	----------	-----------

025 = 250mA

R= ROHS

N= Non
ROHS

TR= Tape /
Reel
Standard)

BU= Bulk

**SMT POLY FUSE SIZE
0603**

Part No.: **R47006-025**

Customer:

DRW:	Lexua	CHKD	Wilson	MATL:	ChuChu	DATE	25.02.2011
APPD:	Jimmi			FINISH	Josi	Sheet	3 from 3

Copyright by EDCON-COMPONENTS H.Schmitt 11.6.2009

www.edcon-components.com

email:info@edcon-components.com