



### Technical Specification

#### Features


Structure of electronic to prevent wasteful electric power consumption.

The RH type bead cores are mainly produced for the cable wire assemblers and MATV CATV makers.

#### Applications

Personal Computers, communications equipment, electronic games machine, CRTs, Hard disk drive, Printers, High current DC lines and other computer peripheral products.

### Dimensions

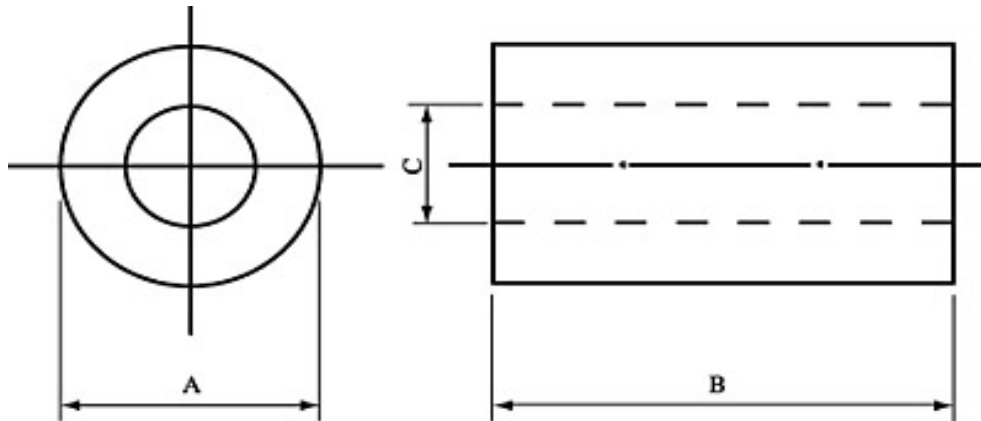

Dimensions of Core		
Outside A (mm)	Length B (mm)	Inside C (mm)
2,50mm ± 0,15mm	4,00mm ± 0,30mm	0,80mm ± 0,15mm

**RH Ferrit 2,5x4,0x0,8mm**

Serie No.: **G32001**


Customer:

DRW:	Johnny	CHKD	Carlo	MATL:	Wor	DATE	11.10.2011
APPD:	Elva			FINISH	Vienna	Sheet	1 from 2

Copyright by EDCON-COMPONENTS



Typical Impedance v.s. Frequency Curve:

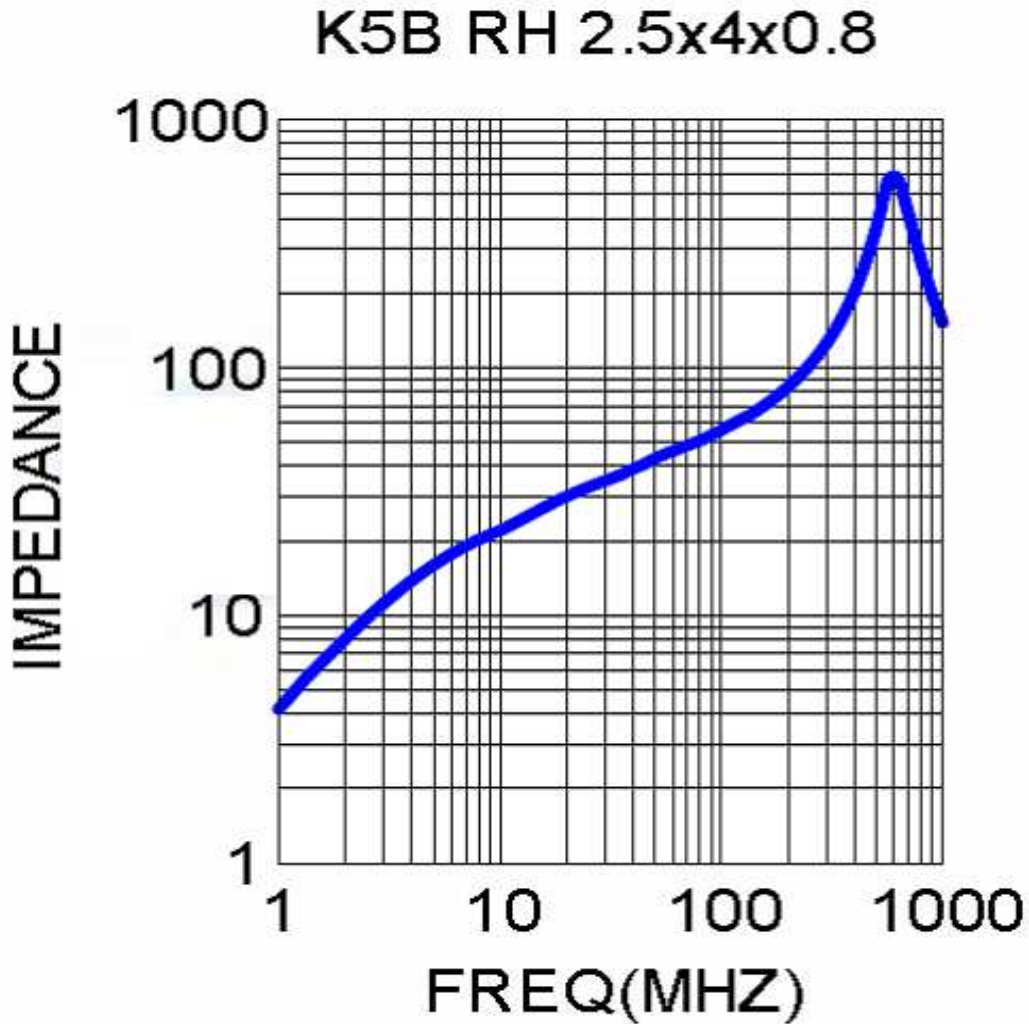

Ordering Information

Serie	Material	ROHS	Packing
G32001	K5B	R	TY

K5B= Type of Material	R= ROHS conform	BU101= Bulk Ware
	N=NON ROHS conform	

<b>RH Ferrit 2,5x4,0x0,8mm</b>	
Serie No.:	<b>G32001</b>
Customer:	

DRW:	Johnny	CHKD	Carlo	MATL:	Wor	DATE	11.10.2011
APPD:	Elva			FINISH	Vienna	Sheet	2 from 2