



Technical Specification

Features


Structure of electronic to prevent wasteful electric power consumption.

The RH type bead cores are mainly produced for the cable wire assemblers and MATV CATV makers.

Applications

Personal Computers, communications equipment, electronic games machine, CRTs, Hard disk drive, Printers, High current DC lines and other computer peripheral products.

Dimensions

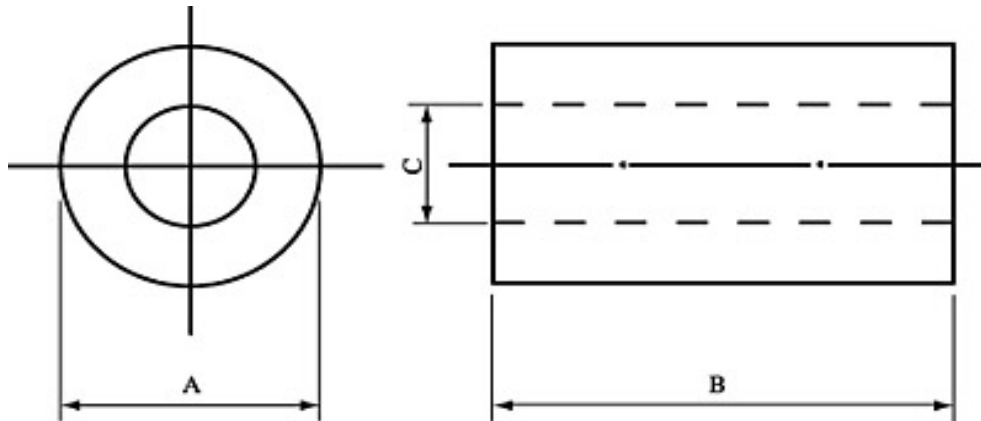

Dimensions of Core		
Outside A (mm)	Length B (mm)	Inside C (mm)
14,2mm ± 0,15mm	15,0mm ± 0,30mm	7,0mm ± 0,15mm

RH Ferrit 14,2x7,0x15,0mm

Serie No.: **G32002**


Customer:

DRW:	Johnny	CHKD	Carlo	MATL:	Wor	DATE	11.10.2011
APPD:	Elva			FINISH	Vienna	Sheet	1 from 2

Copyright by EDCON-COMPONENTS



Typical Impedance v.s. Frequency Curve:

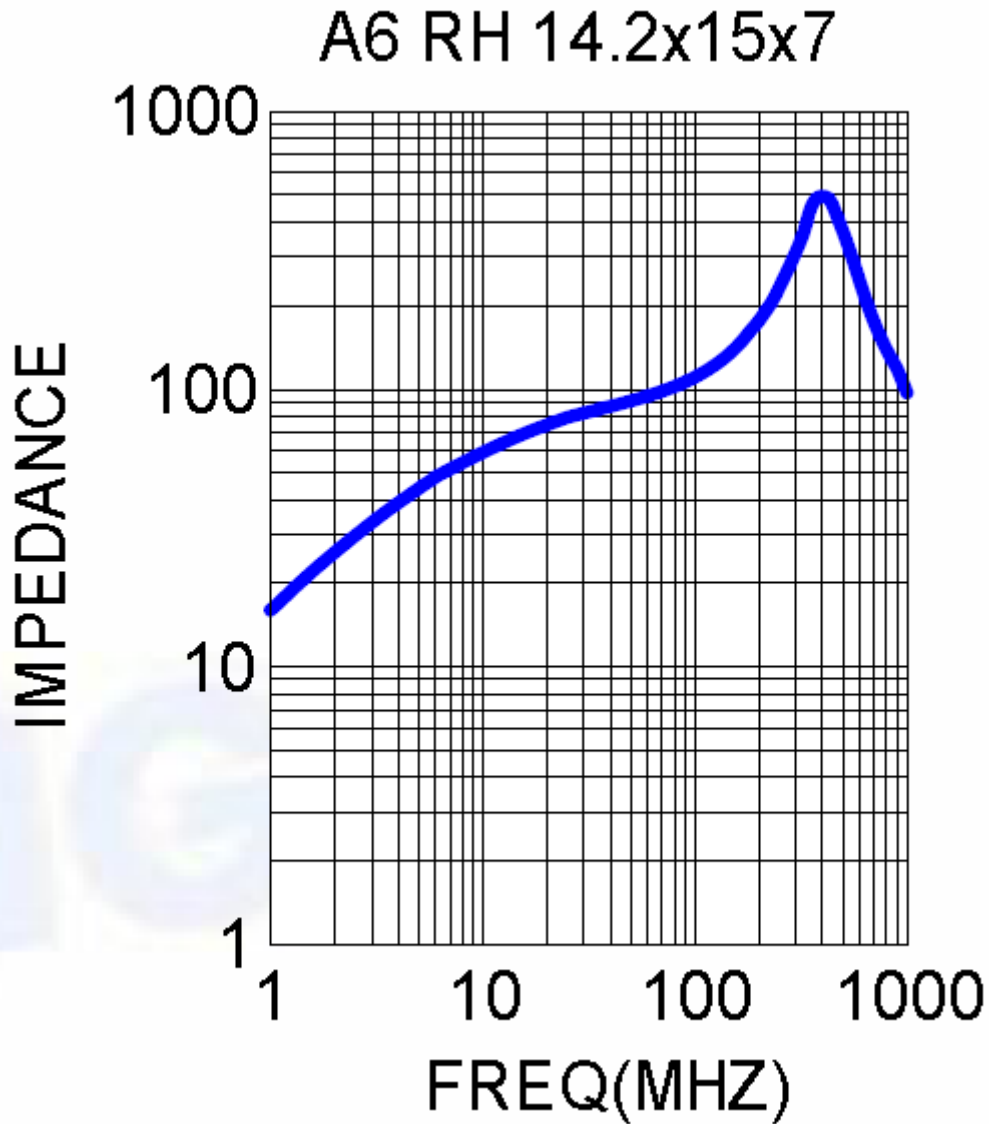

Ordering Information

Serie	Material	ROHS	Packing
G32002	A6	R	TY

A6= Type of Material	R= ROHS conform	BU101= Bulk Ware TY= Tray Packing
	N=NON ROHS conform	

RH Ferrit 14,2x7,0x15,0mm	
Serie No.:	G32002
Customer:	

DRW:	Johnny	CHKD	Carlo	MATL:	Wor	DATE	11.10.2011
APPD:	Elva			FINISH	Vienna	Sheet	2 from 2