



Technical Specification

Features


Structure of electronic to prevent wasteful electric power consumption.

The RH type bead cores are mainly produced for the cable wire assemblers and MATV CATV makers.

Applications

Personal Computers, communications equipment, electronic games machine, CRTs, Hard disk drive, Printers, High current DC lines and other computer peripheral products.

Dimensions

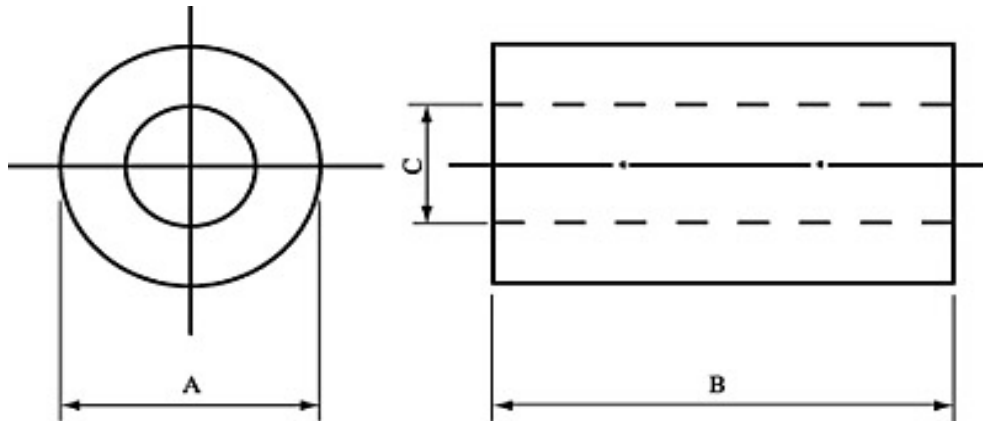

Dimensions of Core		
Outside A (mm)	Length B (mm)	Inside C (mm)
2,5mm ± 0,15mm	7,0mm ± 0,30mm	0,8mm ± 0,15mm

RH Ferrit 2,5x7,0x0,8mm

Serie No.: **G32003**


Customer:

DRW:	Johnny	CHKD	Carlo	MATL:	Wor	DATE	11.10.2011
APPD:	Elva			FINISH	Vienna	Sheet	1 from 2



Typical Impedance v.s. Frequency Curve:

K5B RH 2.5x7x0.8

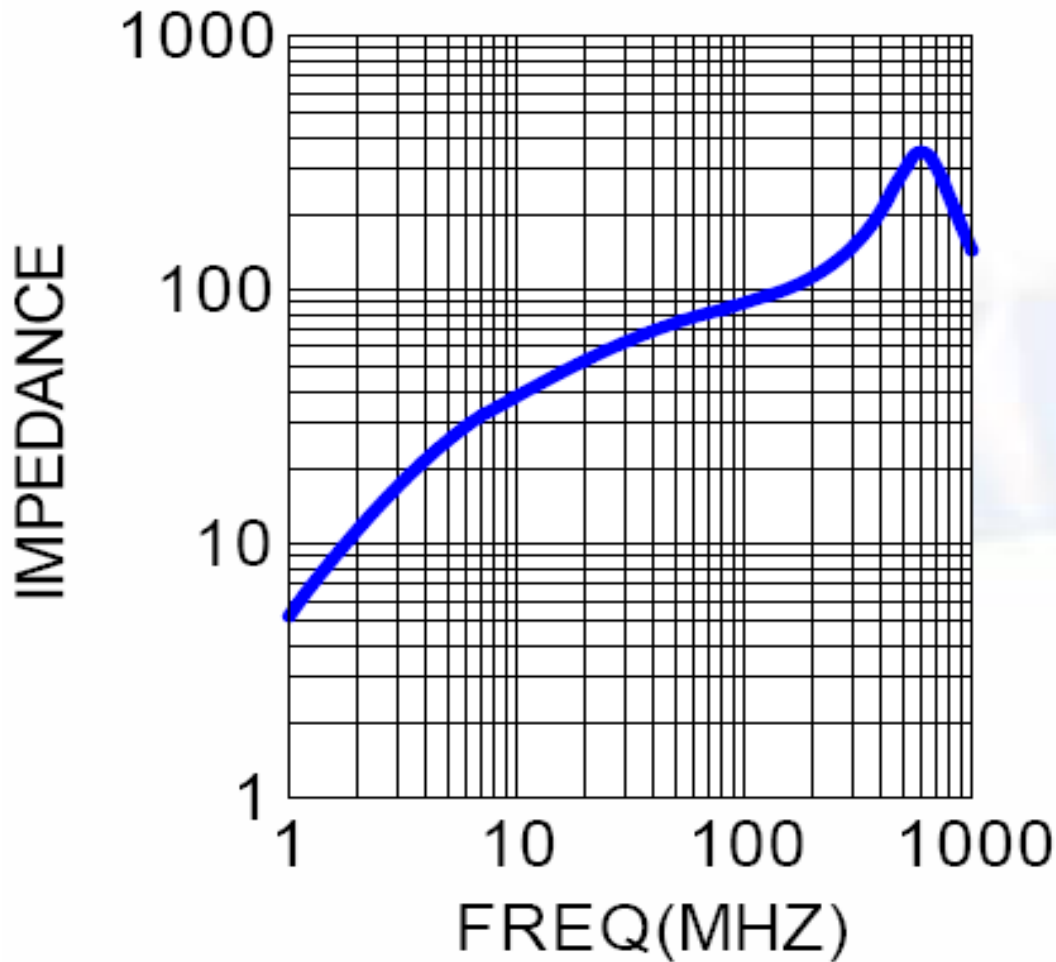

Ordering Information

Serie	Material	ROHS	Packing
G32003	K5B	R	TY

K5B= Type of Material	R= ROHS conform	BU101= Bulk Ware
	N=NON ROHS conform	

RH Ferrit 2,5x7,0x0,8mm	
Serie No.:	G32003
Customer:	

DRW:	Johnny	CHKD	Carlo	MATL:	Wor	DATE	11.10.2011
APPD:	Elva			FINISH	Vienna	Sheet	2 from 2