



### Technical Specification

#### Features


Structure of electronic to prevent wasteful electric power consumption.

The RH type bead cores are mainly produced for the cable wire assemblers and MATV CATV makers.

#### Applications

Personal Computers, communications equipment, electronic games machine, CRTs, Hard disk drive, Printers, High current DC lines and other computer peripheral products.

### Dimensions

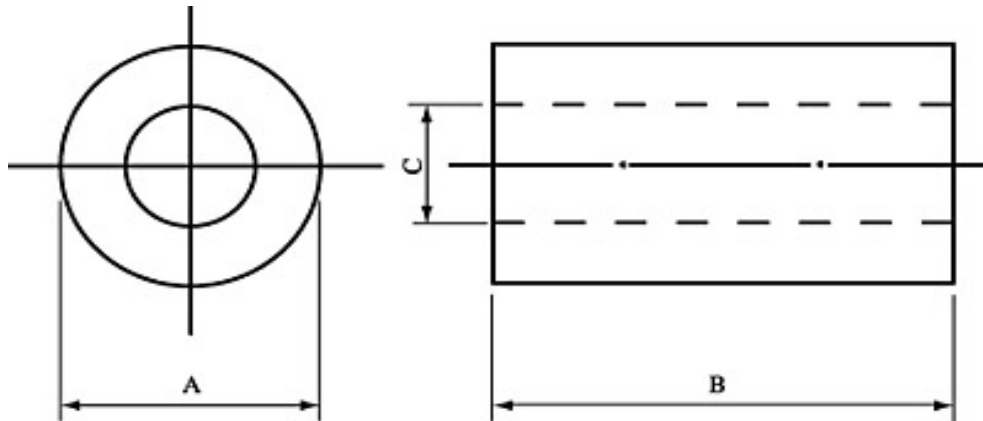

Dimensions of Core		
Outside A (mm)	Length B (mm)	Inside C (mm)
14,2 ± 0,40mm	28,5mm ± 0,60mm	6,35mm ± 0,50mm

### Electrical Informations

Specifiactions	Turns	Test Conditions		Value	Unit	Tol.
Impedance @ 25Mhz	1	25 Mhz	Z	150	Ω	± 25%
Impedance @ 100Mhz	1	100Mhz	Z	280	Ω	± 25%
Impedance @ 25Mhz	2	25 Mhz	Z	400	Ω	typ.
Impedance @ 100Mhz	2	100Mhz	Z	510	Ω	typ.


Operating Temperature: -20°C to + 60°C  
 Storage Temperature: 25°C to + 125°C  
 Test conditions 33% RH / 20°C

<b>RH Ferrit</b>	
<b>14,2x28,5x6,35mm</b>	
Serie No.:	<b>G32134</b>
Customer:	
DRW:	Johnny
CHKD:	Carlo
MATL:	Wor
APPD:	Elva
FINISH:	Vienna
DATE:	16.07.2015
Sheet:	1 from 2

Copyright by S.Tiede



Typical Impedance v.s. Frequency Curve:

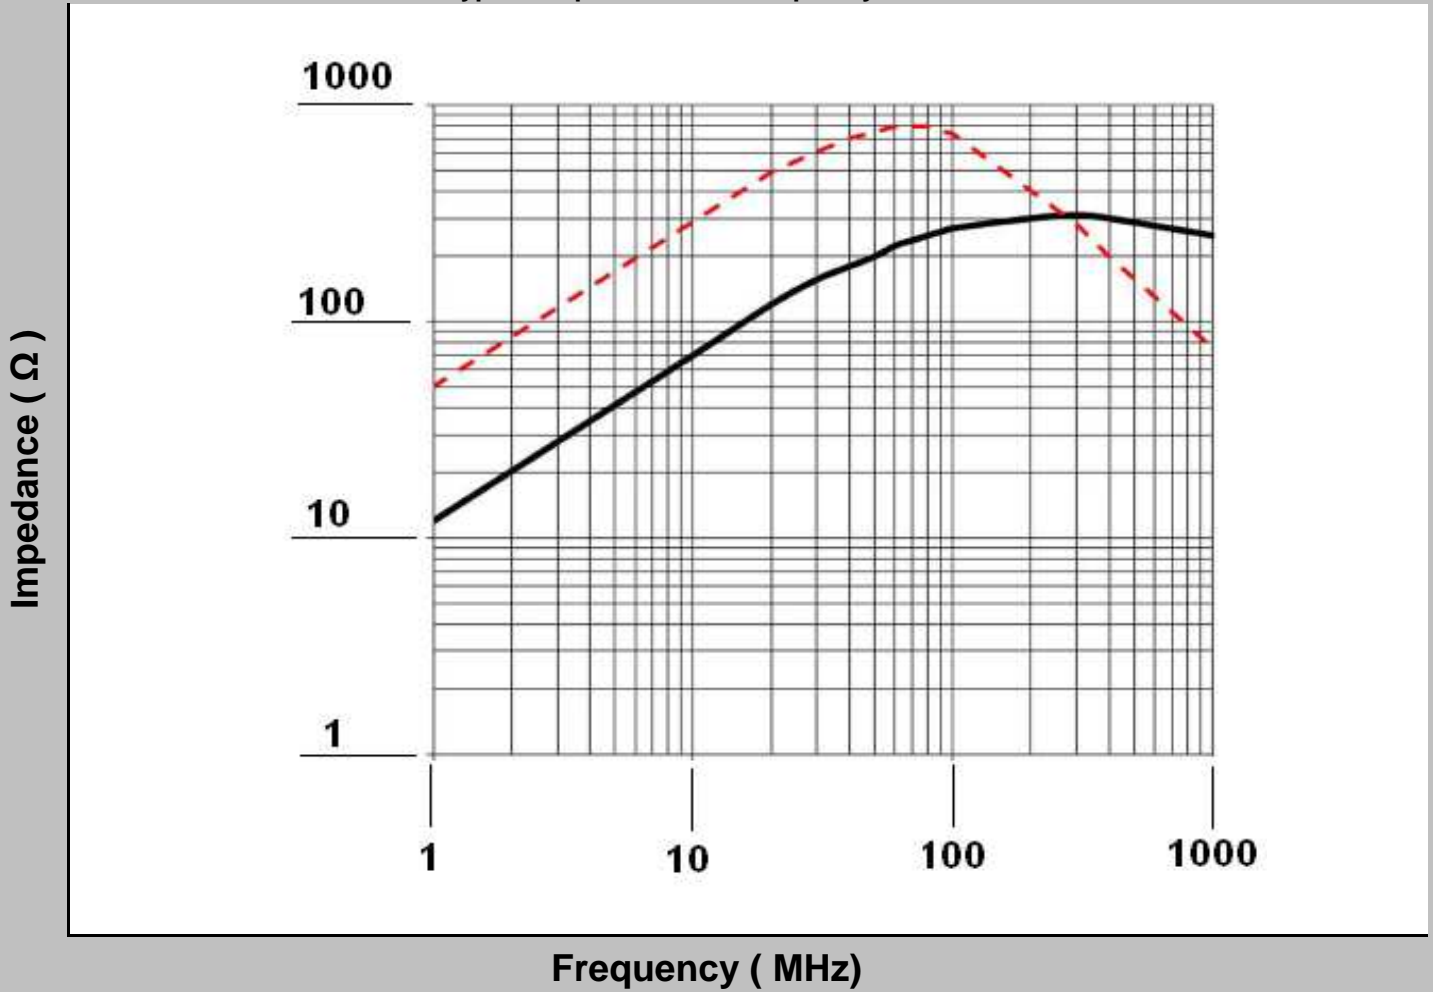

Ordering Information

Serie	Material	ROHS	Packing
G32134	K5B	R	TY

	R= ROHS conform	BU101= Bulk Ware
	N=NON ROHS conform	
K5B= Type of Material		TY= Tray Packing

<b>RH Ferrit</b> <b>14,2x28,5x6,35mm</b>	
Serie No.:	<b>G32134</b>
Customer:	

DRW:	Johnny	CHKD	Carlo	MATL:	Wor	DATE	16.07.2015
APPD:	Elva			FINISH	Vienna	Sheet	2 from 2

Copyright by S.Tiede