



Technical Specification

Features


Structure of electronic to prevent wasteful electric power consumption.

The RH type bead cores are mainly produced for the cable wire assemblers and MATV CATV makers.

Applications

Personal Computers, communications equipment, electronic games machine, CRTs, Hard disk drive, Printers, High current DC lines and other computer peripheral products.

Dimensions

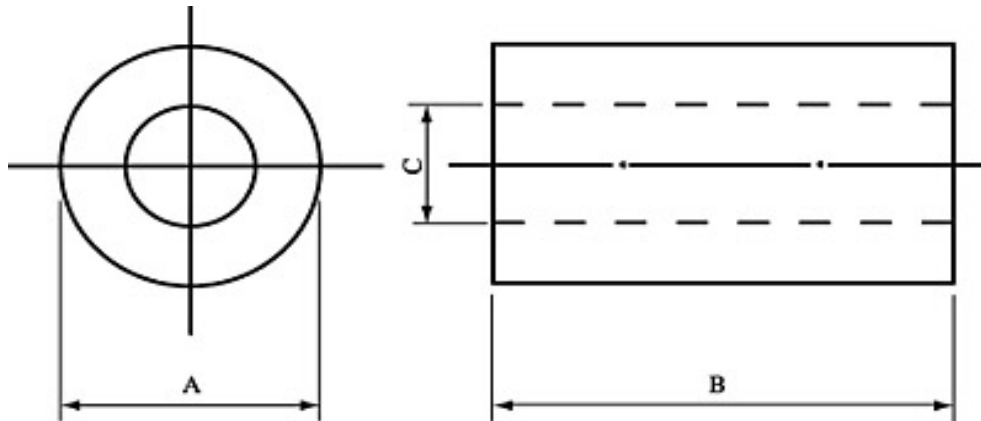

Dimensions of Core		
Outside A (mm)	Length B (mm)	Inside C (mm)
17,5mm ± 0,40mm	28,5mm ± 0,60mm	10,5mm ± 0,50mm

Electrical Characteristics	
Z1 (Ω)	Z2 (Ω)
f= 25Mhz	f= 100Mhz
≥50	≥120


RH Ferrit	
17,5x28,5x10,5mm	
Serie No.:	G32158
Customer:	

DRW:	Johnny	CHKD	Carlo	MATL:	Wor	DATE	11.11.2014
APPD:	Elva			FINISH	Vienna	Sheet	1 from 2

Copyright by S.Tiede



Typical Impedance v.s. Frequency Curve:

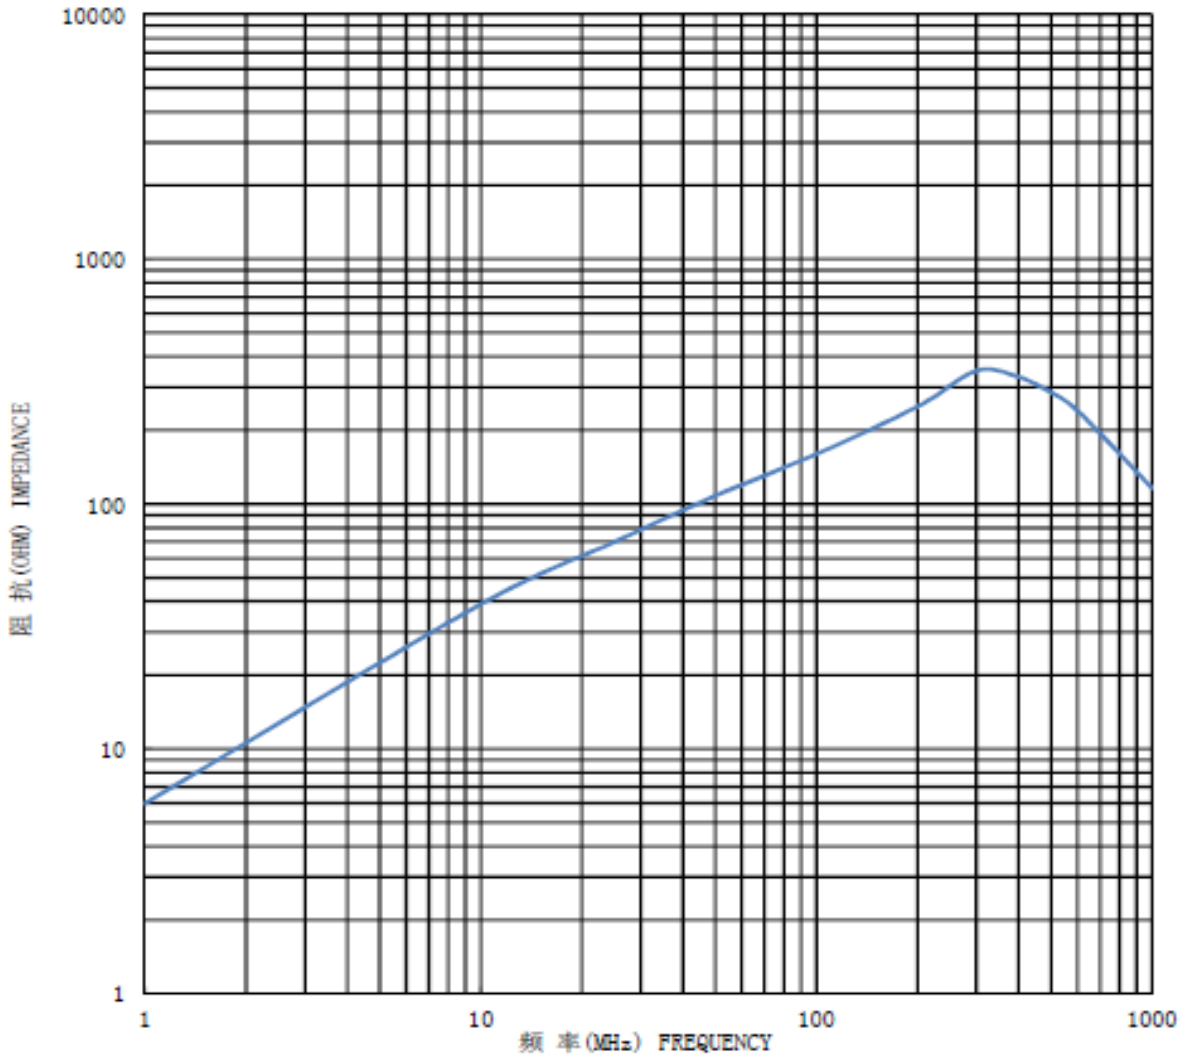

Ordering Information

Serie	Material	ROHS	Packing
G32158	K5B	R	TY

	R= ROHS conform	BU101= Bulk Ware
	N=NON ROHS conform	
K5B= Type of Material		TY= Tray Packing

RH Ferrit	
17,5x28,5x10,5mm	
Serie No.:	G32158
Customer:	

DRW:	Johnny	CHKD	Carlo	MATL:	Wor	DATE	11.11.2014
APPD:	Elva			FINISH	Vienna	Sheet	2 from 2

Copyright by S.Tiede