



### Technical Specification

#### Features


Structure of electronic to prevent wasteful electric power consumption.

The RH type bead cores are mainly produced for the cable wire assemblers and MATV CATV makers.

#### Applications

Personal Computers, communications equipment, electronic games machine, CRTs, Hard disk drive, Printers, High current DC lines and other computer peripheral products.

### Dimensions

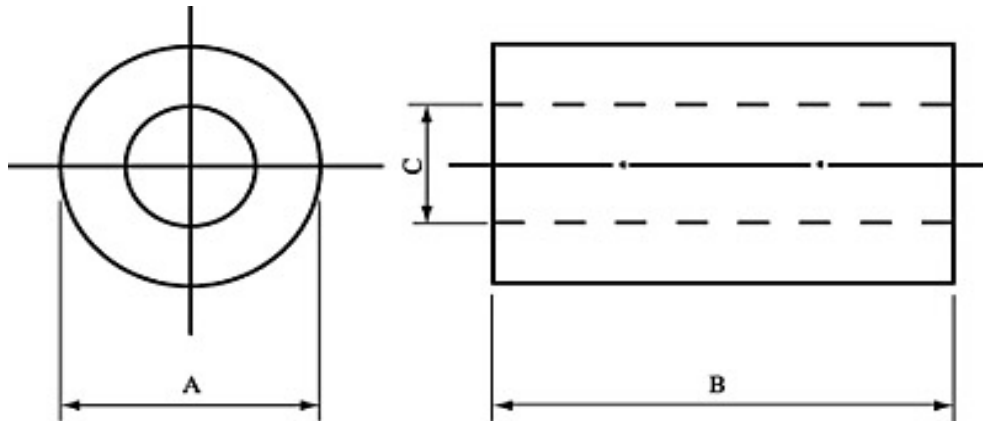

Dimensions of Core		
Outside A (mm)	Length B (mm)	Inside C (mm)
15,8mm ± 0,40mm	50,5mm ± 0,60mm	7,9mm ± 0,50mm

Electrical Characteristics			
	Test F.	Z= Ω	Tol.
Z1 (Ω)	f= 25Mhz	300	±25%
Z2 (Ω)	f= 100Mhz	450	±25%

**RH Ferrit 50,5x15,8x7,9mm**

Serie No.: **G32173**


Customer:

DRW:	Johnny	CHKD	Carlo	MATL:	Wor	DATE	16.07.2015
APPD:	Elva			FINISH	Vienna	Sheet	1 from 2

Copyright by S.Tiede



Typical Impedance v.s. Frequency Curve:

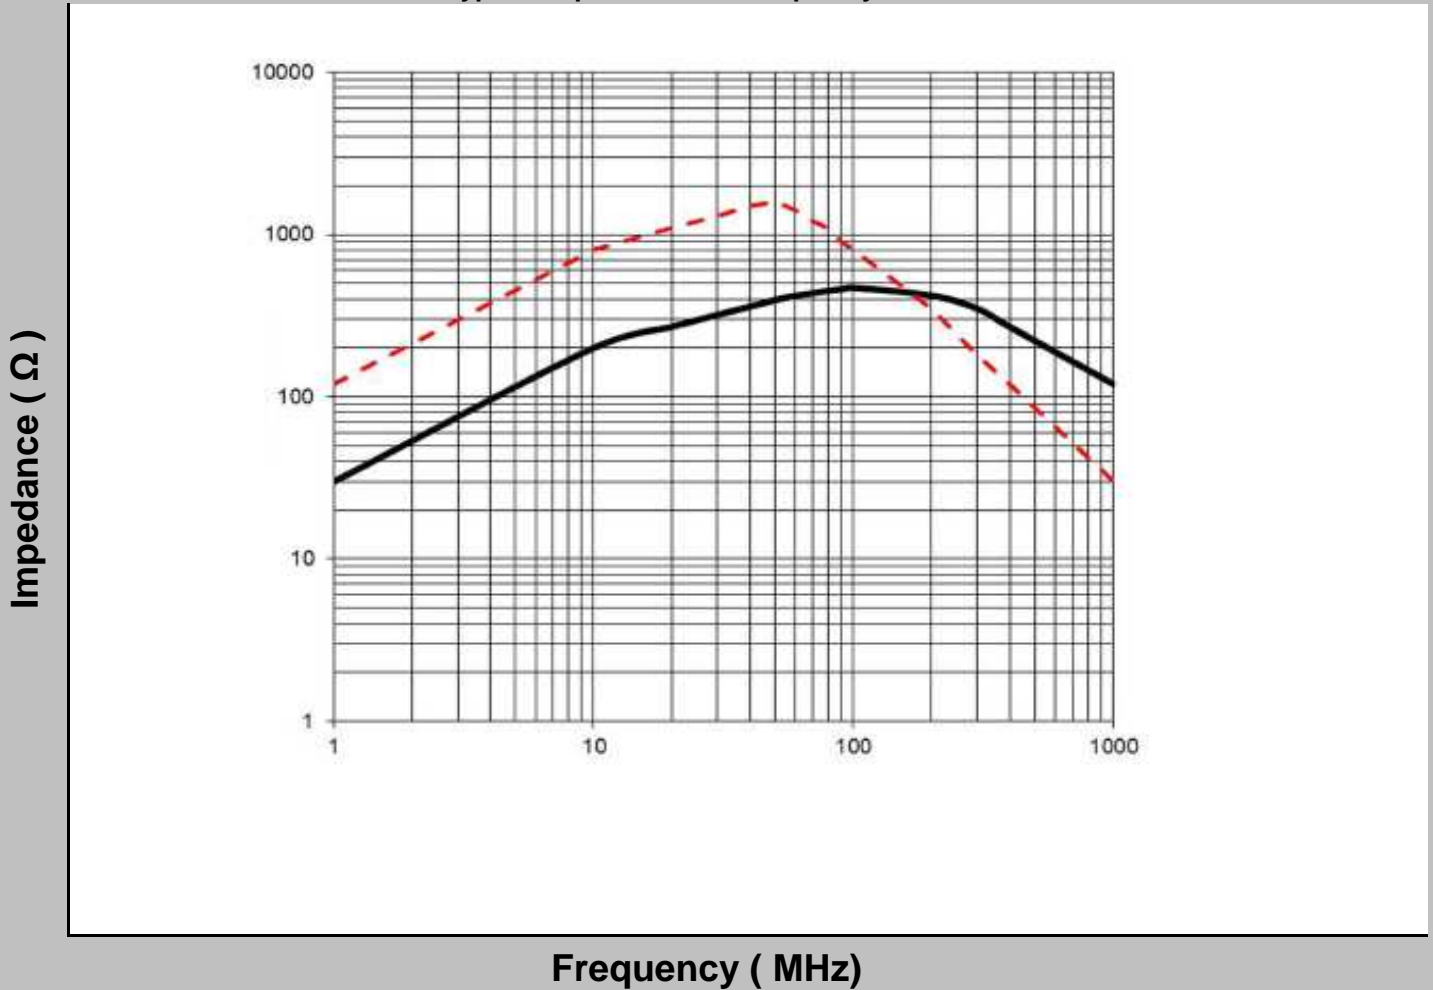

Ordering Information

Serie	Material	ROHS	Packing
G32173	K5B	R	TY

	R= ROHS conform	BU101= Bulk Ware
	N=NON ROHS conform	
K5B= Type of Material		TY= Tray Packing

<b>RH Ferrit 50,5x15,8x7,9mm</b>	
Serie No.:	<b>G32173</b>
Customer:	

DRW:	Johnny	CHKD	Carlo	MATL:	Wor	DATE	16.07.2015
APPD:	Elva			FINISH	Vienna	Sheet	2 from 2

Copyright by S.Tiede