


# EDCON-COMPONENTS






## Specifications

Current Rating:	3 Ampere
Insulator Resistance:	5000 Megaohm min.
Contact Resistance	20m Ohm max.
Dielectric Withstanding:	AC 1000V
Operating Temperature:	.-40°C to +105°C
Contact Material:	Brass
Insulator Material:	Polyester, UL 94V-0
Standard:	P.B.T.
Contact Plating:	Tin, Gold or Selective Plated
Standard:	Gold Flash Overall

## P.C.B Layout

## Drawing (mm)

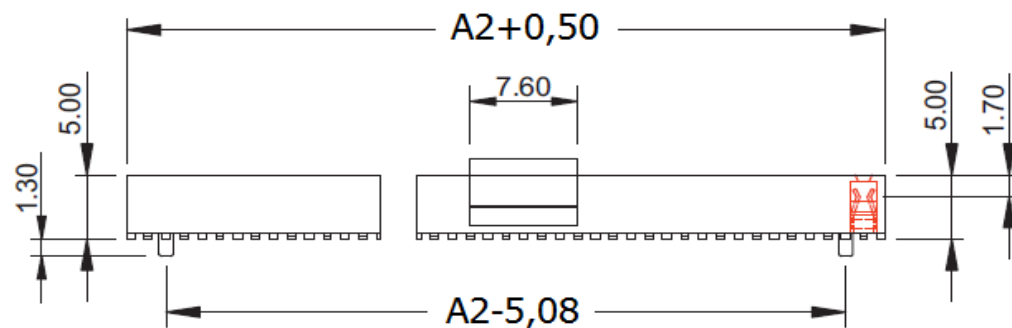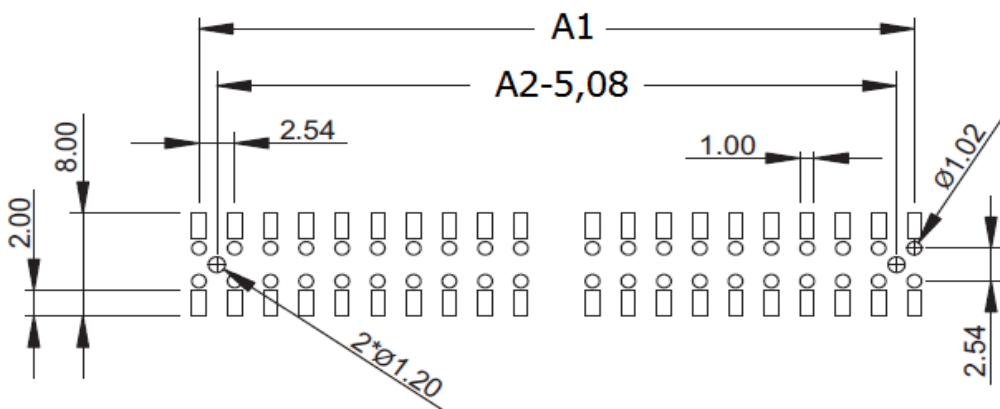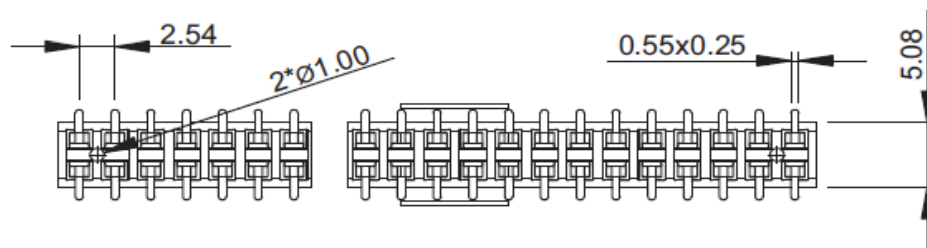

A1 = (No. contacts :2 -1) x 2,54

A2 = (No. contacts :2 ) x 2,54

**Female Header Pitch  
2,54mm**

	X=	X.X=	X.XX=	X.XXX=	Angle
DRW:	±0,35	±0,25	±0,20	±0,15	±5°
APPD:	Wilson	TOLERANCE	Mason	DATE	07.04.2021
	Jamy		Sheet No.	1 from 4	


Part No.: **T27A1074 -**

Customer:

[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)



# EDCON-COMPONENTS



## Pin Code length table free configuration

## Drawing (mm)


Order Code	Dimension (mm)			
	D			
A01	5,08			
A02				
A03				
A04				
A05				
A06				
A07				
A08				
A09				
A10				
A11				
A12				
A13				
A14				
A15				
A16				
A17				
A18				
A19				
A20				
A21				
A22				

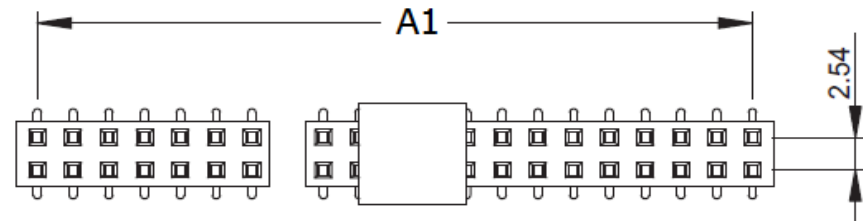

<b>Female Header Pitch</b> <b>2,54mm</b>
Part No.: <b>T27A1074 -</b>
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	07.04.2021
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 4

# EDCON-COMPONENTS



## Ordering Informations

Serie	No. of Pos.	Construction	Contact Plating	Material	Special Function	Pin Length Code	ROHS	Packing		
<b>T27A1074 -</b>	<b>XX</b>	<b>SS</b>	<b>G0</b>	<b>PB</b>	<b>N</b>	<b>A01</b>	<b>R</b>	<b>BU</b>		

<b>04 ~ 80 Pos.</b>	<b>SS=</b> straight SMT	<b>G0=</b> Gold Flash (Standard)	<b>PB=</b> P.B.T	<b>N=</b> No	look Table No. 1	<b>N=</b> NO ROHS conform	<b>BU=</b> Bulk (Standard)					
		<b>T0=</b> Tin plated						<b>NY=</b> Nylon-6T	<b>R=</b> ROHS conform	<b>TU=</b> Tube w/o Cap		
		<b>GA=</b> 10µ Gold Plating	<b>PA=</b> PA-46					<b>TC=</b> Tube w. pic and Place Cap				
		<b>GB=</b> 15µ Gold Plating									<b>TY=</b> Tray packing w/o Cap	
		<b>GC=</b> 20µ Gold Plating										<b>TR=</b> Tape/Reel w. pic and Place Cap
		<b>S0=</b> Selectiv Plating Gold Flash / Tin										


<b>Female Header Pitch 2,54mm</b>
Part No.: <b>T27A1074 -</b>
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	07.04.2021
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4


[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)


# EDCON-COMPONENTS



## Soldering Profile for Lead Soldering ( P.B.T. )

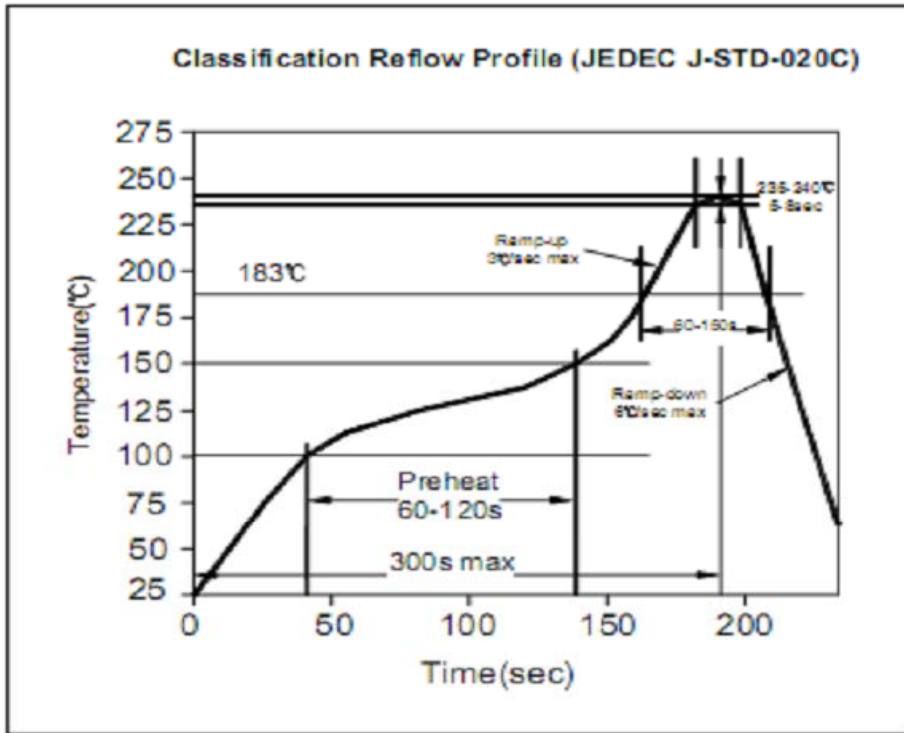

## Soldering Profile for Lead Free Soldering ( Nylon 6T )

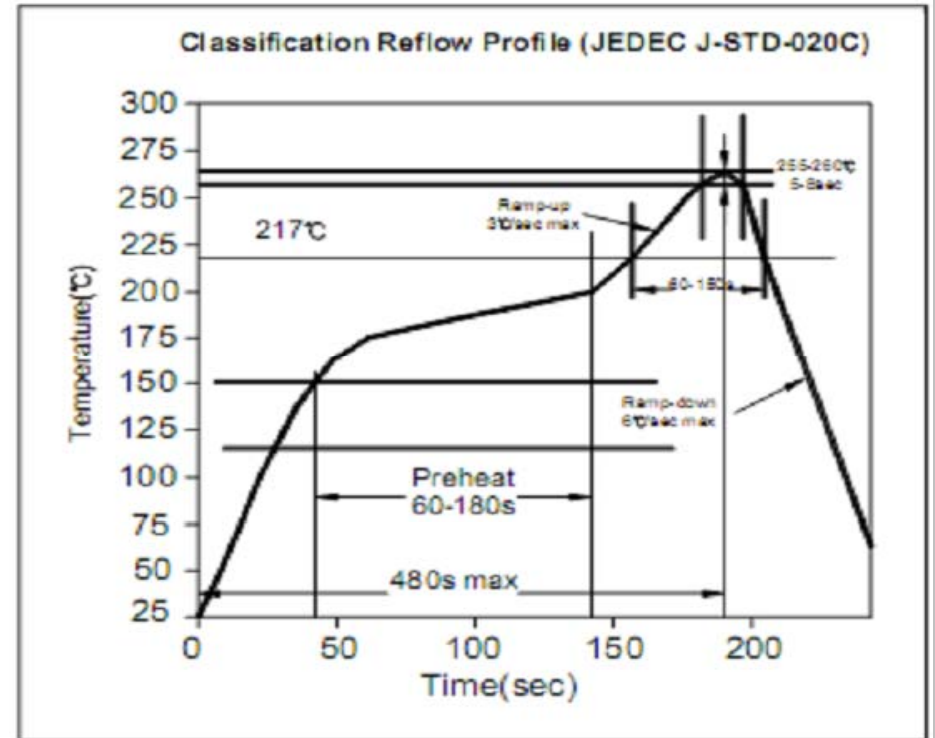

**Female Header Pitch  
2,54mm**

Part No.: **T27A1074 -**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	07.04.2021
APPD:	Schumi			FINISH	Jamy		Sheet No.		4 from 4

[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)