



# EDCON-COMPONENTS



## Drawing

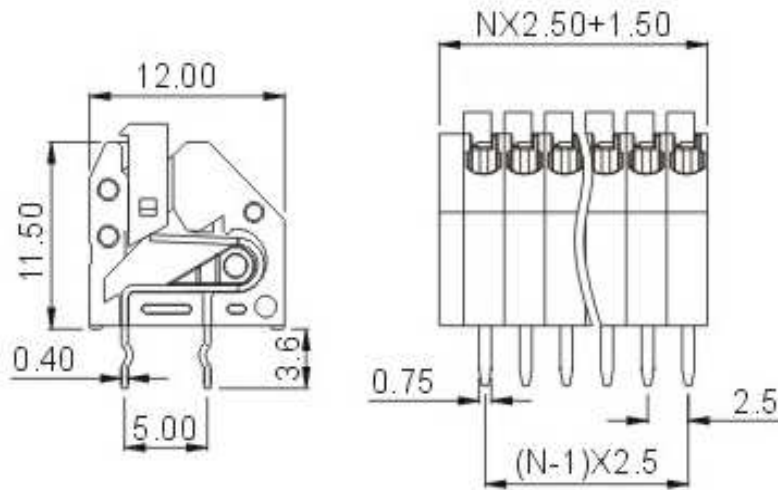

## P.C.B. Layout

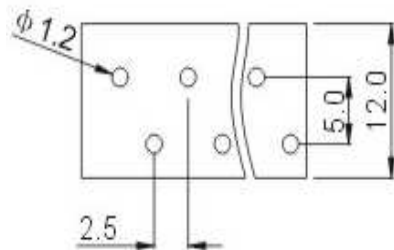

## Specifications

APPROVAL		UL <sup>®</sup> US	CE
<b>Electrical</b>			
Standard		UL	IEC
Rated voltage		300V	250V
Rated current		2A	6A
Wire range		24-20 AWG	0.5mm <sup>2</sup>
Withstanding voltage		AC2000V/1min	
<b>Mechanical</b>			
Ambient temperature		-40°C ~ +105°C	
Strip length		8.5 - 9.5mm	
<b>Dimensions</b>			
Pitch		2.50mm	
Poles		1P-xxP	
<b>Material</b>			
Housing		PA66 (UL94V-0)	
Pin header		Phosphor Bronze, Tin plated	
Wire guard		Stainless steel	



## Certification



Screwless Terminal Block

Pitch 2.50mm

Part No.: **A11E009**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	20.07.2009	Customer:
APPD:	Schumi			FINISH	Jamy			Sheet No.	1 from 3	

[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)



**Ordering Informations**

Serie	-	No. of Pole	Body-Color	Pitch-Layout	-	Customer Request
<b>A11E009</b>	-	<b>XX</b>	<b>XX</b>	<b>X</b>	-	<b>X</b>

XX = total	<b>WH</b> - white	<b>1</b> - Single Pitch
	<b>GN</b> - green	<b>2</b> - Double Pitch
	<b>GR</b> - gray	
	<b>PG</b> - Phoenix Green	
	<b>OR</b> - orange	
	<b>BK</b> - black	
	<b>BL</b> - blue	
	<b>LG</b> - light gray	



**Certification**



Screwless Terminal Block  
Pitch 2.50mm


Part No.: **A11E009**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	20.07.2009	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 3		



Soldering - Profil

Classification Reflow Profile (JEDEC J-STD-020C)

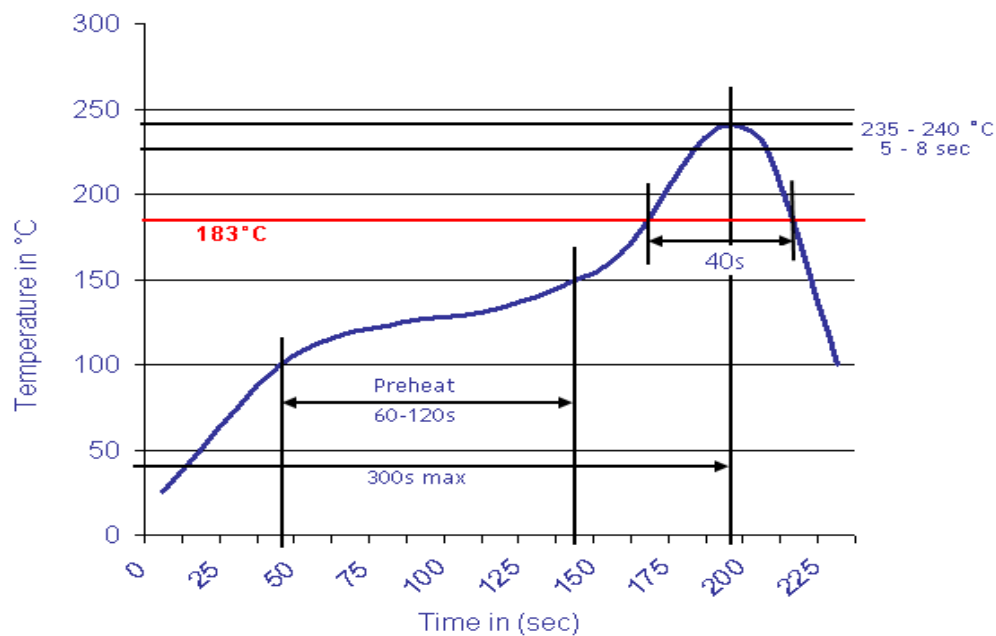

Screwless Terminal Block  
Pitch 2.50mm

Part No.: **A11E009**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	20.07.2009	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3		