




# EDCON-COMPONENTS



## Drawing

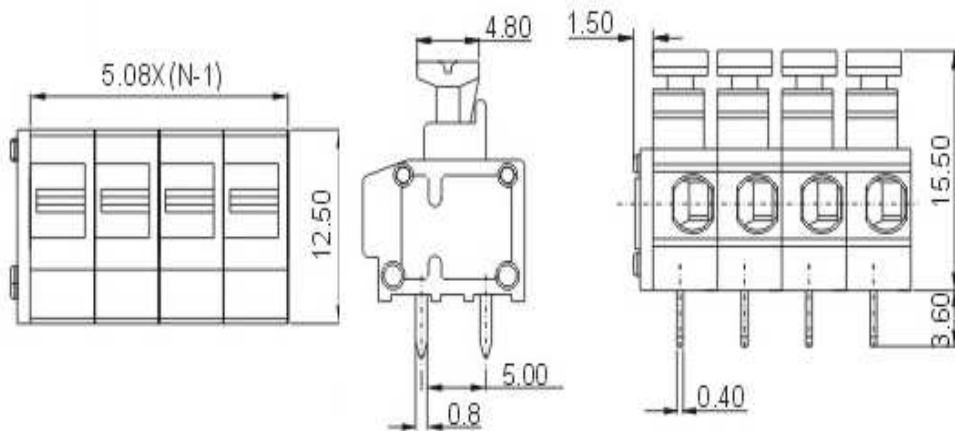

## P.C.B. Layout

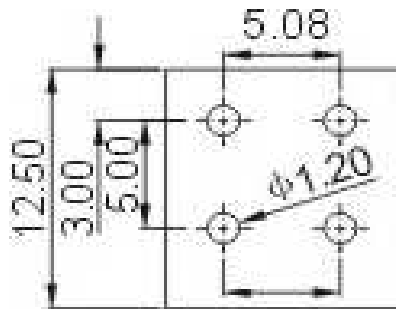

## Specifications

### APPROVAL

#### Electrical

Standard  
 Rated voltage  
 Rated current  
 Wire range  
 Withstanding voltage



UL  
 300V  
 5A  
 20-18 AWG



IEC  
 250V  
 10A  
 1.5mm<sup>2</sup>  
 AC2000V/1Min

#### Mechanical

Wire strip length  
 Operating temperature

9 ~ 10mm  
 -40°C ~ +105°C

#### Dimensions

Pitch  
 Poles

5.08mm  
 1P - xxP

#### Material

Housing  
 Pin header  
 Wire guard

PA66 (UL94V-0)  
 Phosphor Bronze, Tin plated  
 Stainless steel



### Certification




Screwless Terminal Block /  
 Pitch 5.08mm

Part No.: **A11M011**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.07.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	Customer:

[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)



Ordering Informations

Serie	-	No. of Pole	Body-Color	-	Customer Request
A11M011	-	XX	XX	-	X

XX = total	WH - white
	GN - green
	GR - gray
	PG - Phoenix Green
	OR - orange
	BK - black
	BL - blue
	LG - light gray




**Certification**



Screwless Terminal Block /  
Pitch 5.08mm


Part No.: **A11M011**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.07.2009	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 3		



Soldering - Profil

Classification Reflow Profile (JEDEC J-STD-020C)

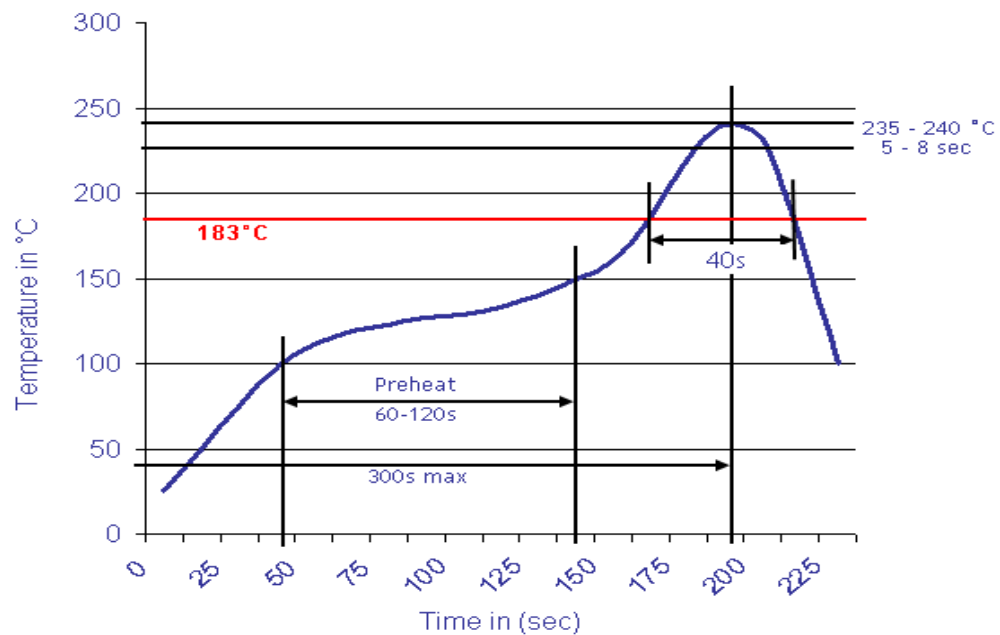

Screwless Terminal Block /

Pitch 5.08mm

Part No.: **A11M011**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.07.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	

Customer:

email: [info@edcon-components.com](mailto:info@edcon-components.com)