

Data Sheet

Screwless Terminal Block

Pitch: 6,35 mm

Serie: A11S001

Customer Information for special Item

EDCON Customer : 0

Customer Version No. : 0



EDCON-COMPONENTS



Technical Discription

Drawing (Dimension in mm)

	UL	IEC
Electrical		
Standard		
Rated voltage	160V	160V
Rated current	12A	12A
Wire range		26-18 AWG
Withstanding voltage		AC2500V/1min
Mechanical		
Operating temperature		-40°C ~ +105°C
Strip length		10mm
Dimensions		
Pitch		6.35mm
Poles		1P - xxP
Material		
Housing		PA66 (UL94V-0)
Pin header		Phosphor Bronze, Tin plated
Wire guard		Stainless steel

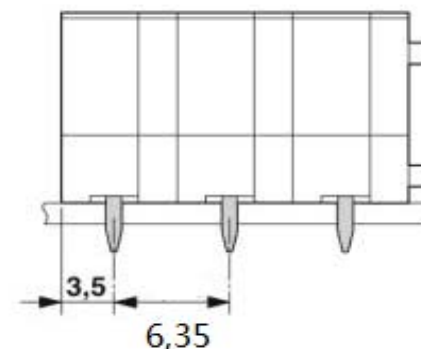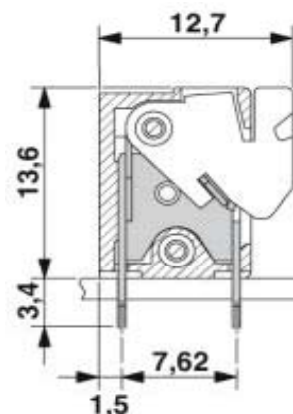

Screwless Terminal Block

Part No.: **A11S001**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.08.2017
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	

EDCON-COMPONENTS



Ordering Informations

Serie	No. of Pos.	Body Color	Special function	Approval Code	ROHS	Packing	EDCON Cust. No.	Customer Version		
A11S001	01	GN	N	N	R	B				

Pitch:
6,35

01 = Number of Pos. Standard 1 ~ 12Pos.	GY = Gray (Standard)	N = No special	N = NON Approval	R = ROHS Conform	B = Standard Package	xxxxxx = Customer Number	xxx = Customer Version ??(Printing)
	GN = Green		A = UL /UR Approval Please consult EDCON for available	N = NON ROHS Conform	I = Individual Package		
			B = VDE Approval Please consult EDCON for available				
	OR = Orange		C = TÜV Approval Please consult EDCON for available				
	BK = Black		1 = Approval for Material				

Screwless Terminal Block


Part No.: **A11S001**
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.08.2017
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

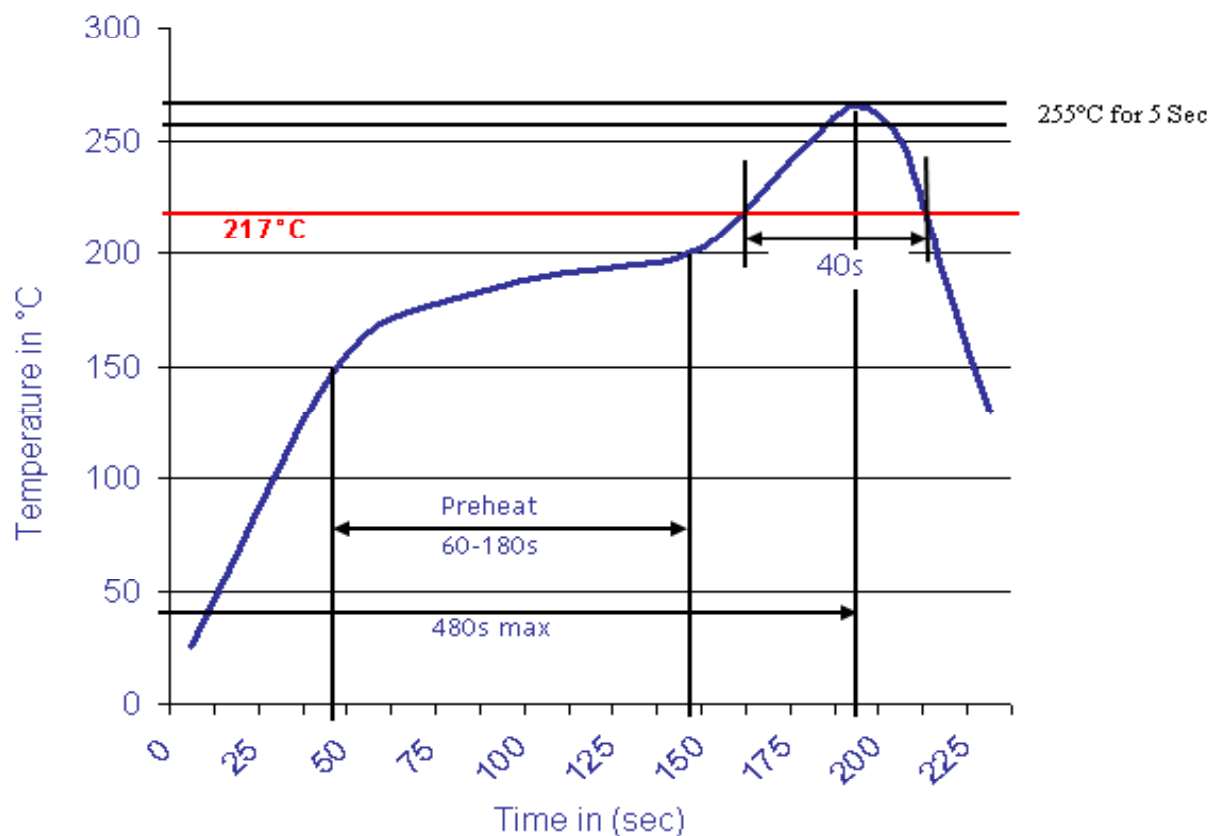

Screwless Terminal Block

Part No.: **A11S001**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.08.2017
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	