




Drawing

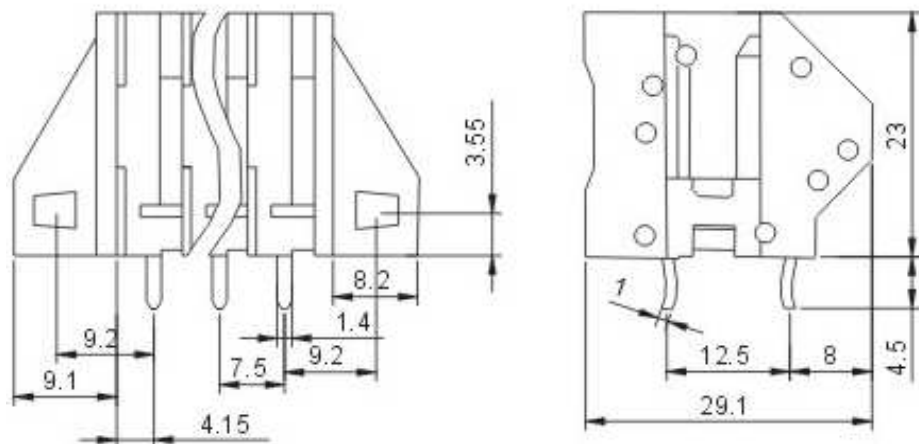

P.C.B. Layout

Specifications

Electrical

Standard	UL	IEC
Rated voltage	300V	250V, 450V
Rated current	10A	41A
Wire range	24-10 AWG	6.0mm ²
Withstanding voltage	AC2000V/1Min	

Mechanical

Wire strip length	11 ~ 12mm
Operating temperature	-40°C ~ +105°C

Dimensions

Pitch	10.00mm
Poles	1P - xxP

Material

Housing	PA66 (UL94V-0)
Pin header	Phosphor Bronze, Tin plated
Wire guard	Stainless steel



Screwless Terminal Block /

Pitch 10.00mm

Part No.: **A11T017**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.07.2009	Customer:
APPD:	Schumi			FINISH	Jamy			Sheet No.	1 from 3	



Ordering Informations

Serie	-	No. of Pole	Body-Color	-	Customer Request
A11T017	-	XX	XX	-	X

XX = total	WH - white
	GN - green
	GR - gray
	PG - Phoenix Green
	OR - orange
	BK - black
	BL - blue
	LG - light gray




Screwless Terminal Block / Pitch 10.00mm
Part No.: A11T017
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.07.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 3



Soldering - Profil

Classification Reflow Profile (JEDEC J-STD-020C)

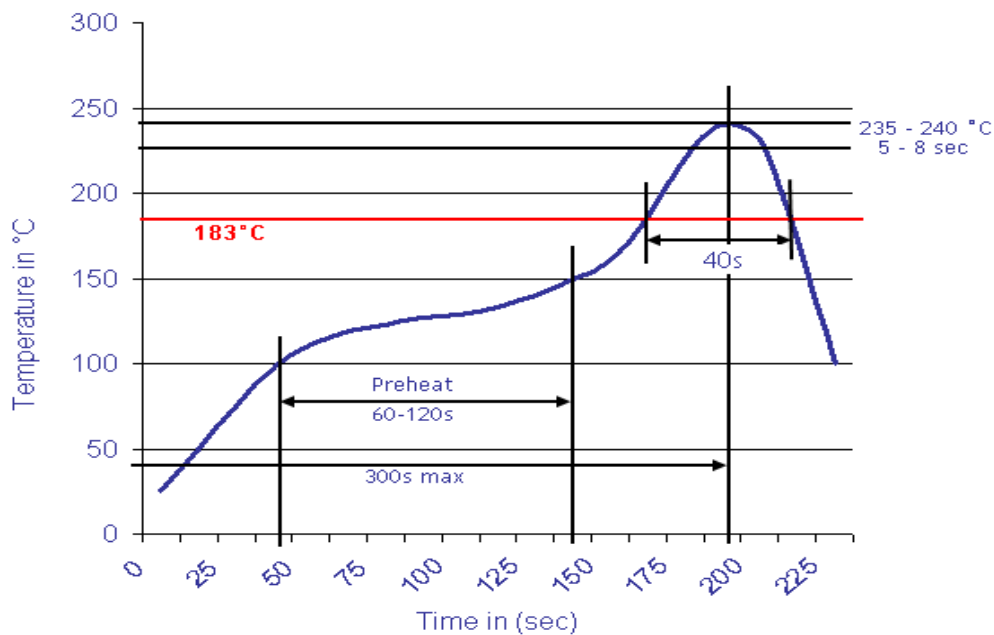

Screwless Terminal Block /

Pitch 10.00mm

Part No.: **A11T017**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.07.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	

Customer: