




EDCON-COMPONENTS

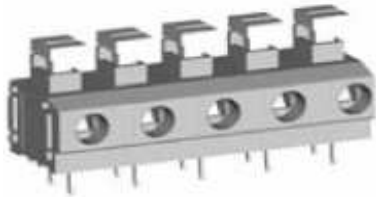

Drawing

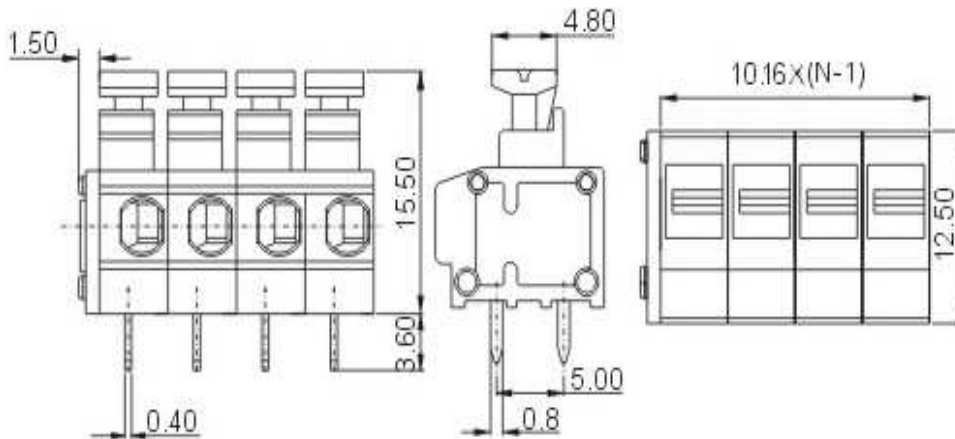

P.C.B. Layout

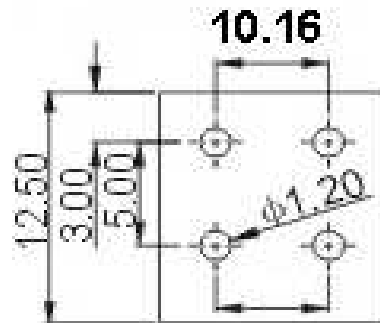

Specifications

APPROVAL

Electrical

Standard
 Rated voltage
 Rated current
 Wire range
 Withstanding voltage



UL	IEC
300V	250V
5A	10A
20-18 AWG	2 x 0.75mm ²
AC2000V/1Min	

Mechanical

Wire strip length
 Operating temperature

9 ~ 10mm
 -40°C ~ +105°C

Dimensions

Pitch
 Poles

10.16mm
 1P - xxP

Material

Housing
 Pin header
 Wire guard

PA66 (UL94V-0)
 Phosphor Bronze, Tin plated
 Stainless steel



Certification



Screwless Terminal Block /


Pitch 10.16mm

Part No.: **A11U007**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.07.2009	Customer:
APPD:	Schumi			FINISH	Jamy			Sheet No.	1 from 3	

www.edcon-components.com

email: info@edcon-components.com

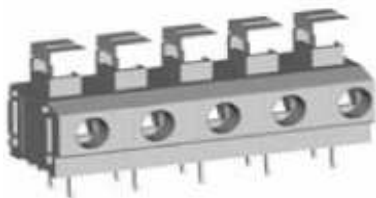

Ordering Informations

Serie	-	No. of Pole	Body-Color	-	Customer Request
A11U007	-	XX	XX	-	X

XX = total	WH - white
	GN - green
	GR - gray
	PG - Phoenix Green
	OR - orange
	BK - black
	BL - blue
	LG - light gray




Certification




Screwless Terminal Block / Pitch 10.16mm
Part No.: A11U007
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.07.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 3

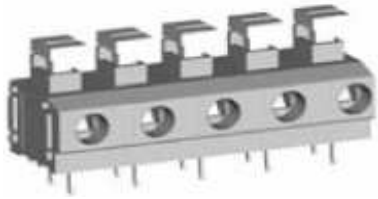

Soldering - Profil

Classification Reflow Profile (JEDEC J-STD-020C)

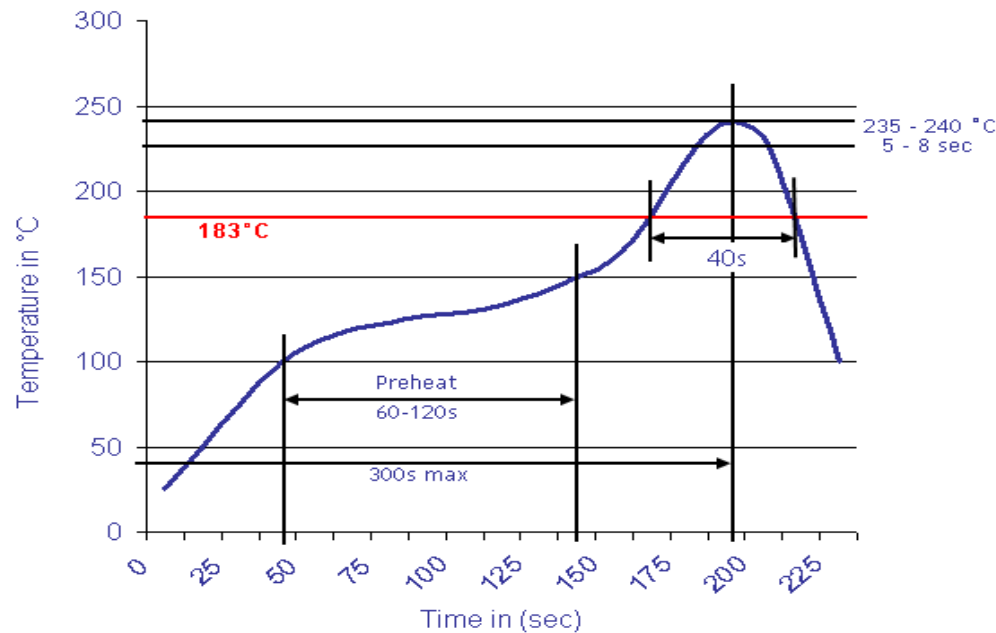

Screwless Terminal Block /

Pitch 10.16mm

Part No.: **A11U007**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.07.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	

Customer:

email: info@edcon-components.com