

# Data Sheet

## Pluggable Terminal Block Pitch 5,00mm

**Pitch: 5,00 mm**

**Serie: A12L060**

### Customer Information for special Item

**EDCON Customer : xxxxxx**

**Customer Version No. : xx**



## Technical Description

### Electrical:

Rated voltage:

Rated current:

Withstanding Voltage: AC/1min:

Operating Temperature:

### Mechanical:

Wire range: Solid wire: AWG

Wire range: Stranded wire: AWG

### Material:

Housing Terminal Body:

Material Contact

UL	IEC	VDE
300V	250V	
2A	4A	
2000V		






-40°C ~ +125°C

	0,14-0,5mm	
	0,14-0,5mm	

Thermoplastik UL94V-0

Phosphor Bronze / Tin plated

## Drawing (Dimension in mm)

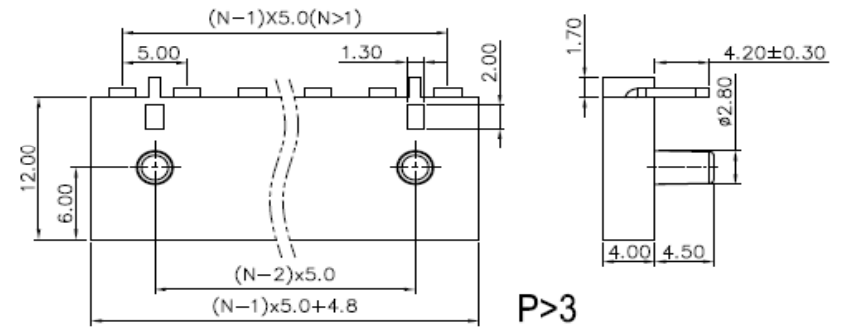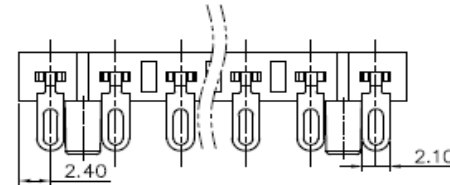

Tolerances unless otherwise specified (mm)

x	x.x	x.xx	x.xxx	Angle
±	±	±	±	±3°
Wilson	TOLERANCE	Mason	DATE	02.04.2020
Jamy		Sheet No.	1 from 4	

**Pluggable Terminal Block Pitch 5,00mm**

Part No.: **A12L060**

Customer:

DRW:	Jason	CHKD	Wilson
APPD:	Schumi		

MATL:

FINISH

# EDCON-COMPONENTS



## PCB Layout Dimension (mm)

Bottom-VIEW

## Dimensions (mm)

N	Tol. N	N1	Tol. N1	No. of Pos.
10,00	± 0,35	9,80	± 0,35	<b>02</b>
15,00	± 0,35	14,80	± 0,35	<b>03</b>
20,00	± 0,35	19,80	± 0,35	<b>04</b>
25,00	± 0,35	24,80	± 0,35	<b>05</b>
30,00	± 0,35	29,80	± 0,35	<b>06</b>
35,00	± 0,35	34,80	± 0,35	<b>07</b>
40,00	± 0,35	39,80	± 0,35	<b>08</b>
45,00	± 0,35	44,80	± 0,35	<b>09</b>
50,00	± 0,35	49,80	± 0,35	<b>10</b>
55,00	± 0,35	54,80	± 0,35	<b>11</b>
60,00	± 0,35	59,80	± 0,35	<b>12</b>
65,00	± 0,35	64,80	± 0,35	<b>13</b>
70,00	± 0,35	69,80	± 0,35	<b>14</b>
75,00	± 0,35	74,80	± 0,35	<b>15</b>
80,00	± 0,35	79,80	± 0,35	<b>16</b>
85,00	± 0,35	84,80	± 0,35	<b>17</b>
90,00	± 0,35	89,80	± 0,35	<b>18</b>

<b>Pluggable Terminal Block Pitch 5,00mm</b>	
Part No.:	<b>A12L060</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2020
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 4

# EDCON-COMPONENTS



## Ordering Informations

Serie	No. of Pos.	Body Color	Srew Type	Approval Code	ROHS	Packing	EDCON Cust. No.	Customer Version		
<b>A12L060</b>	<b>02</b>	<b>NA</b>	<b>N</b>	<b>N</b>	<b>R</b>	<b>B</b>	<b>xxxxxx</b>	<b>xx</b>		

Pitch
5,00

02= Number of Pos.	NA= Natural		N= NON Approval	R= ROHS Conform	B= Standard Package Box/ Polybag	xxxxxx= Customer Number	xx= Customer Version (Printing) ??
Standard 2 ~ 18Pos.			N= NON ROHS Conform		I= Individual Package		
		N= no Function					


<b>Pluggable Terminal Block Pitch 5,00mm</b>	
Part No.:	<b>A12L060</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2020
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

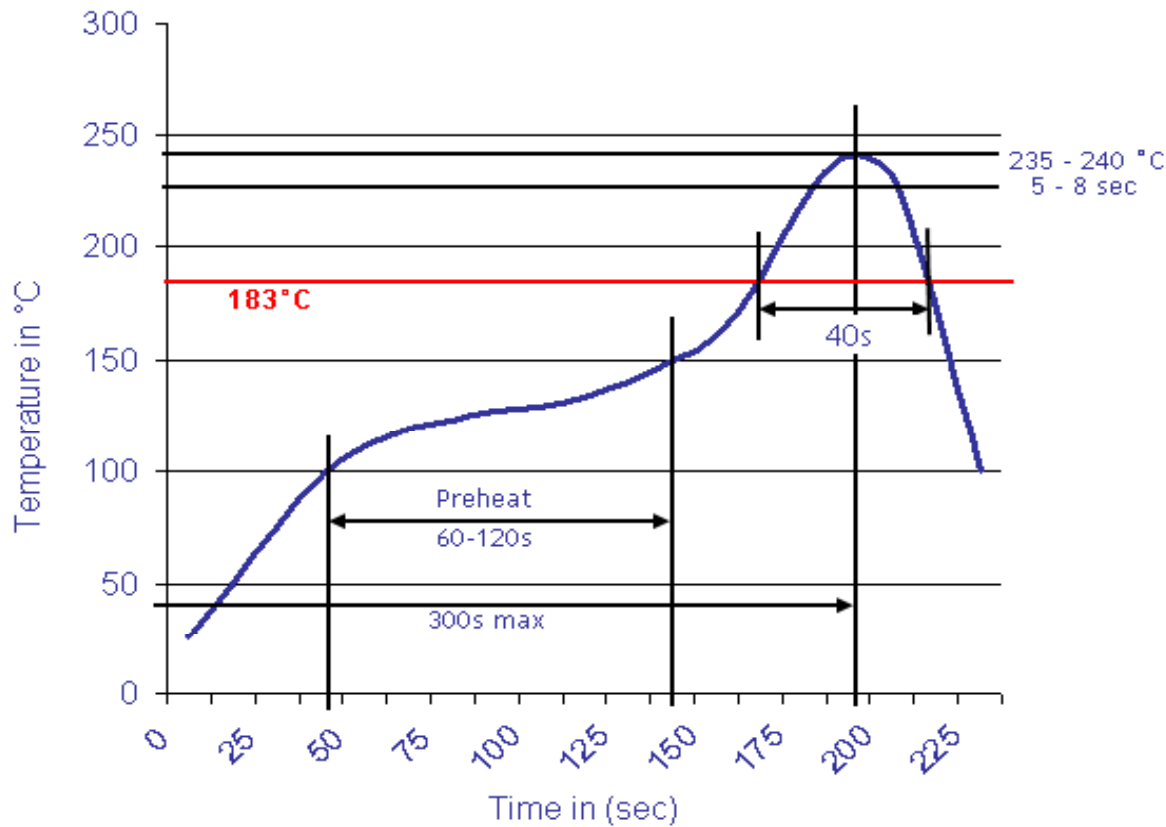

Pluggable Terminal Block Pitch  
5,00mm

Part No.: **A12L060**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2020
APPD:	Schumi			FINISH	Jamy		Sheet No.		4 from 4

