


EDCON-COMPONENTS




Drawing

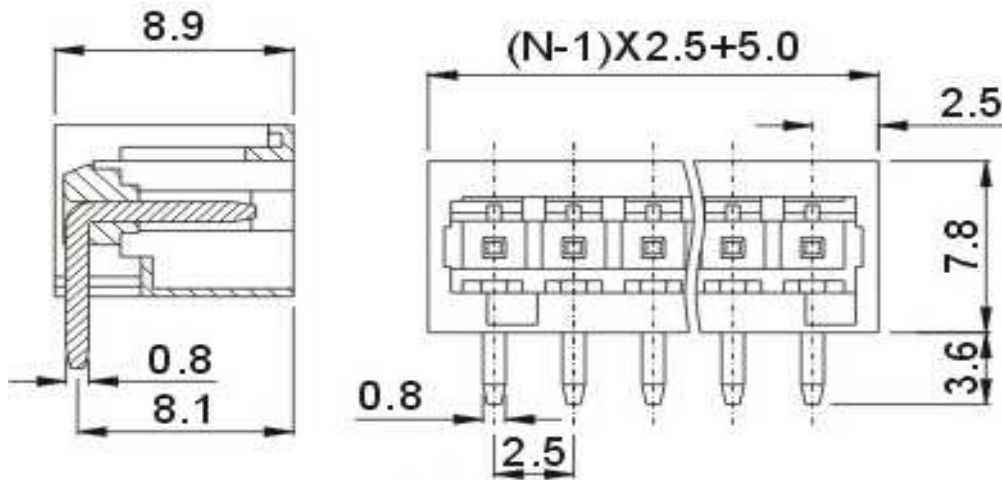

Specification

APPROVAL		(UL)	CE
Electrical		pending	
Standard		UL	IEC
Rated voltage		150V	130V
Rated current		4A	6A
Withstanding voltage		AC 1250V/1min	
Mechanical			
Ambient temperature		-40°C ~ +105°C	
Dimensions			
Pitch		2.5mm	
Poles		2P - 24P	
Material			
Housing		PA66 (UL94V-0)	
Pin header		Brass, Tin plated	

P.C.B. Layout

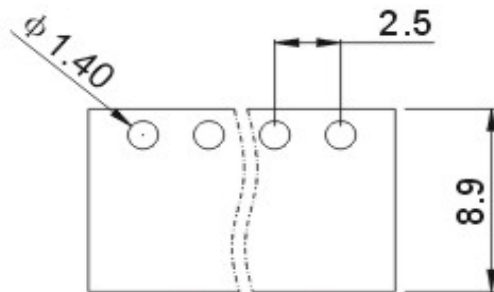

Certification



Pluggable Terminal Block /
Pitch 2.50mm

Part No.: A14E016

Customer:

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.10.2009
APPD:	Pete			FINISH	Mike			Sheet No.	1 from 3

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	-	No. of Pole	Body-Color	-	Customer Request
A14E016	-	XX	XX	-	X
		XX = total	WH - white		
		02	GN - green		
		...	GR - gray		
		24	TP - transparent		
			OR - orange		
			BK - black		
			BL - blue		
			RD - red		
			YW - yellow		
			PG - Phoenix Green		



Certification



Pluggable Terminal Block / Pitch 2.50mm	
Part No.:	A14E016
Customer:	

DRW:	Justin	CHKD:	Frank	MATL:	Jordan	TOLERANCE:	Lord	Date:	10.10.2009
APPD:	Pete	FINISH:	Mike				Sheet No.:	2 from 3	


www.edcon-components.com

email: info@edcon-components.com



Soldering - Profil

Classification Reflow Profile (JEDEC J-STD-020C)

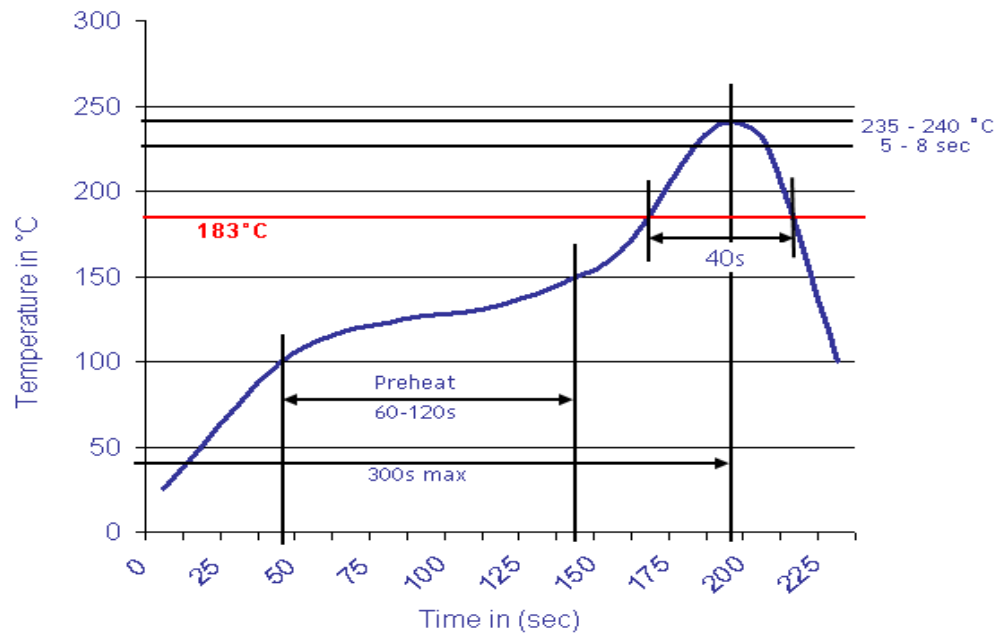

Pluggable Terminal Block /
Pitch 2.50mm

Part No.: A14E016

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.10.2009
APPD:	Pete			FINISH	Mike			Sheet No.	3 from 3

Customer: