



EDCON-COMPONENTS



Drawing

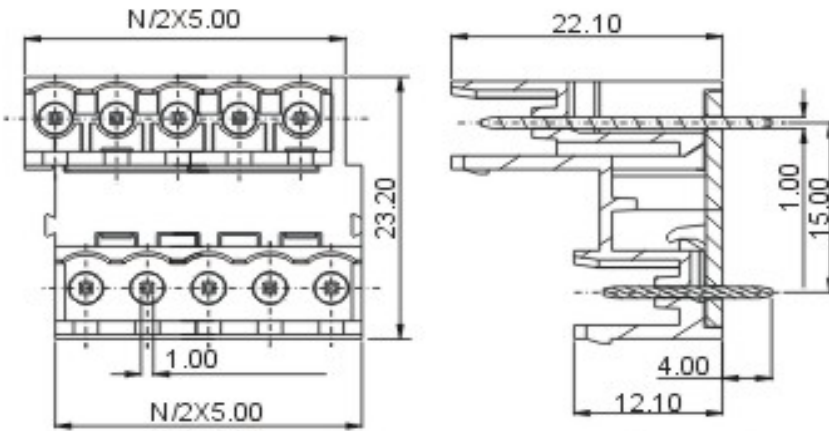

P.C.B. Layout

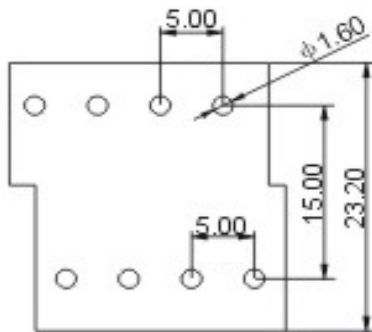

Specification

APPROVAL			
Electrical			
Standard		UL	IEC
Rated voltage		300V	320V
Rated current		15A	10A
Withstanding voltage		AC 2500V/1min	
Mechanical			
Ambient temperature		-40°C ~ +105°C	
Dimensions			
Pitch		5.00mm	
Poles		2x (2P, 3P - 24P)	
Material			
Housing		PA66 (UL94V-0)	
Pin header		Brass, Tin plated	



Certification



Pluggable Terminal Block /
Pitch 5.00mm

Part No.: A14L052

Customer:

DRW:	Bill	CHKD	Lord	MATL:	Jimmy	TOLERANCE	Sam	DATE	14.3.2009
APPD:	Louis			FINISH	Georg			Sheet No.	1 from 3

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	-	No. of Pole	Body-Color	-	Customer Request
A14L052	-	XX	XX	-	X

XX = total	WH - white
02	GN - green
...	GR - gray
24	LG - light gray
	PG - Phoenix Green
	OR - orange
	BL - blue
	BK - black



Certification



Pluggable Terminal Block /
Pitch 5.00mm

Part No.: A14L052

Customer:

DRW:	Bill	CHKD	Lord	MATL:	Jimmy	TOLERANCE	Sam	DATE	14.3.2009
APPD:	Louis			FINISH	Georg			Sheet No.	2 from 3

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Soldering - Profil

Classification Reflow Profile (JEDEC J-STD-020C)



Pluggable Terminal Block /
Pitch 5.00mm

Part No.: A14L052

Customer:

DRW:	Bill	CHKD	Lord	MATL:	Jimmy	TOLERANCE	Sam	DATE	14.3.2009
APPD:	Louis			FINISH	Georg		Sheet No.	3 from 3	

www.edcon-components.com

email: info@edcon-components.com