

EDCON-COMPONENTS




Ac-Socket: ESS301-12

■ SPECIFICATIONS

DIELECTRIC STRENGTH	AC3000V-60sec. BETWEEN POLES
INSULATION RESISTANCE	BETWEEN POLES BY DC500V MIN 1000M Ω
CONTACT RESISTANCE	ATTACHED TO POWER CONNECTOR MAX 50 M Ω AT 10A
HEAT RESISTANCE	100 \pm 5 $^{\circ}$ C FOR 1HR
FORMING STRENGTH OF CONTACT AND BODY	STATIC LOAD OF 10 POUNDS/60sec
STRENGTH OF SCREW MOUNTING	ROTATIONAL TORQUE OF 8KG/CM. 5sec
IMPACT TEST	0.5KG 1TIMES ACCORDING TO UII950
RATING	250VAC 10A (2.5A)

■ DIMENSIONS

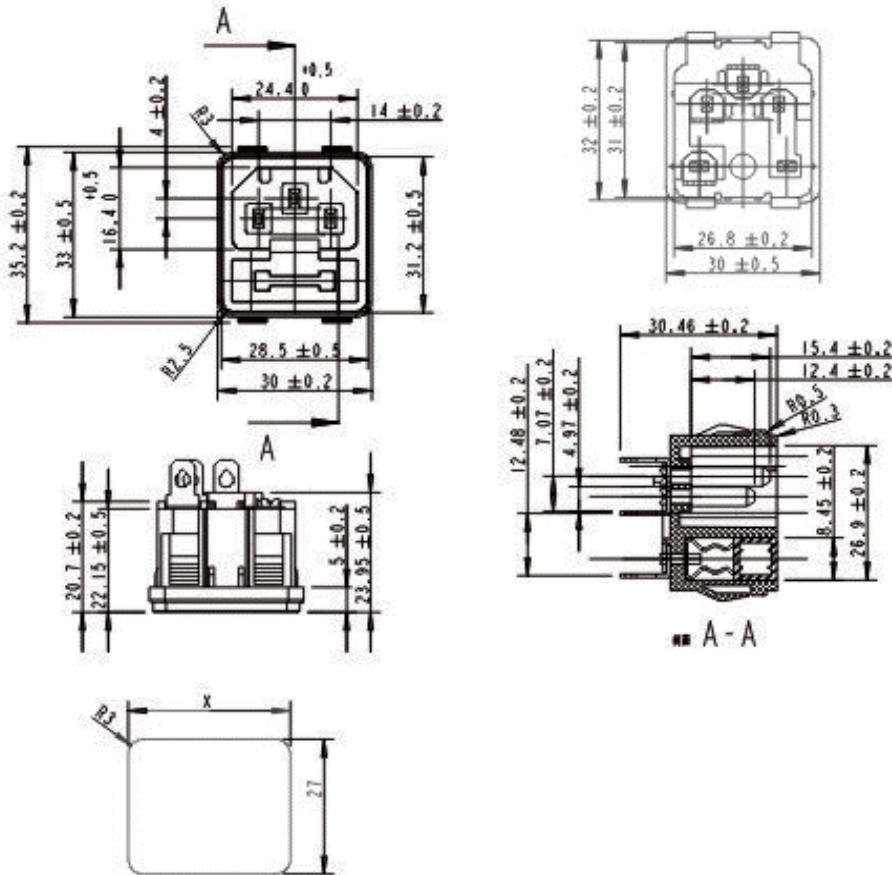

THICKNESS:
 0.8~1.8(X=31.00)
 1.9~3.2(X=32.00)

Copyright © by EDCON-COMPONENTS Marco Schmitz 28.09.2007

www.edcon-components.com

info@edcon-components.com