



ANYTEK Technology Corporation Ltd.

Home Chinese Big5

[aaa](#) | [aCompanya](#) | [aProducta](#) | [aNew Producta](#) | [aCataloga](#) | [aPatent&Certificatea](#) | [aSafetya](#) | [aNewsa](#) | [aContact Usa](#)



Home > Product

**Pitch: 2.50mm Poles: 2P-12P**




**Electrical:**

Electrical: cULus  
 Voltage rating: 150V  
 Current rating: 4A  
 Wire range:  
 Solid wire(AWG): 22-28  
 Stranded wire(AWG): 22-28  
 Wire retention force:  
 Screw:  
 Wire strip length: 6~7mm  
 Withstanding Voltage: 1.3KV  
 Operating temperature: -40°C to +115°C  
 Soldering temperature: 250°C±10°C/5Sec

**Materials**

Material:  
 Terminal Body: Brass  
 (Contact pin): Stainless steel  
 Wire guard: Brass  
 Surface of solder tail: Tin plated  
 Insulator (housing): Thermoplasti(UL94V-0)

**Approval**

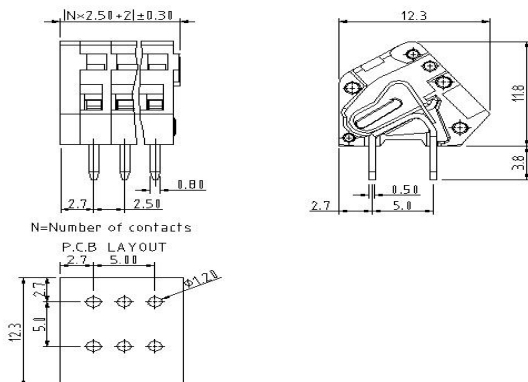

**How to Order**

**HE XX X 0 X X 0 0 0 0 G**

End Stackable 01 1 contacts 02 2 contacts 03 3 contacts ... .. 24 24 contacts	5 2.54/.10"		0 Black 4 Orange 5 Green(RAL6018/T) 6 Blue 8 Grey(RAL7004/P)	0 With level 1 Without Level	000 0 Standard  Any special item by customer request, please contact sales department.	G RoHS compliant (lead<4%) In copper A lloy  H RoHS compliant (lead<1000ppm) In copper A lloy
--	-------------	--	--	---------------------------------	--	---