



EDCON-COMPONENTS



Drawing

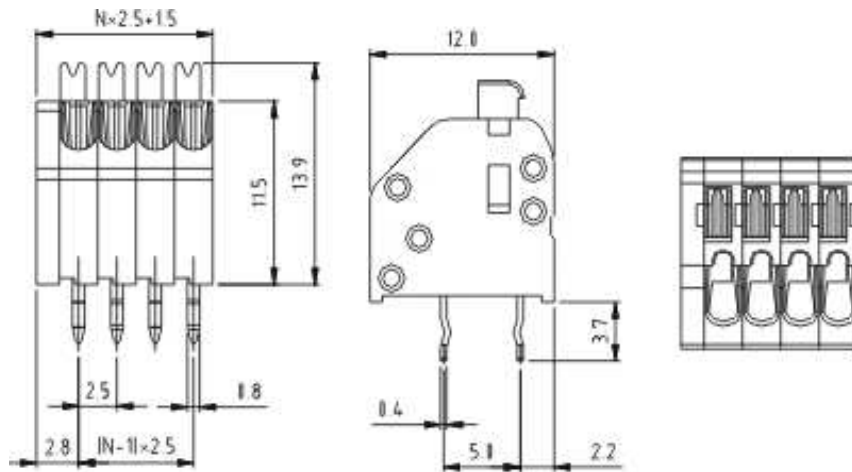

P.C.B. Layout

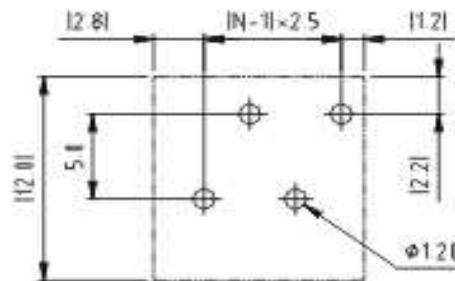

Specification

APPROVAL



Electrical

Standard	cULus
Rated voltage	300V
Rated current	2A
Solid wire	20-26 AWG
Stranded wire	20-26 AWG
Withstanding voltage	1.6KV

Mechanical

Ambient temperature	-40°C ~ +115°C
Soldering temperature	250°C ± 10°C/5sec
Strip length	6 ~ 7mm

Dimensions

Pitch	2.50mm
Poles	2P - 24P

Material

Housing	Thermoplastic (UL94V-0)
Pin header	Tin plated
Wire guard	Stainless steel



Screwless Terminal Block

Pitch 2.50mm

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	24.09.2009	Part No.:	A11E010
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 3	Customer:	

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	-	No. of Pole	Body-Color	-	Customer Request
A11E010	-	XX	XX	-	X

XX = total	WH - white
02	GN - green
...	GR - gray
24	<i>(standard)</i>
	PG - Phoenix Green
	OR - orange
	BK - black
	BL - blue
	LG - light gray



Certification



Screwless Terminal Block

Pitch 2.50mm

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	24.09.2009	Part No.:	A11E010
APPD:	Schumi			FINISH	Jamy			Sheet No.	2 from 3	Customer:	

www.edcon-components.com


email: info@edcon-components.com

EDCON-COMPONENTS



Soldering - Profil

Classification Reflow Profile (JEDEC J-STD-020C)

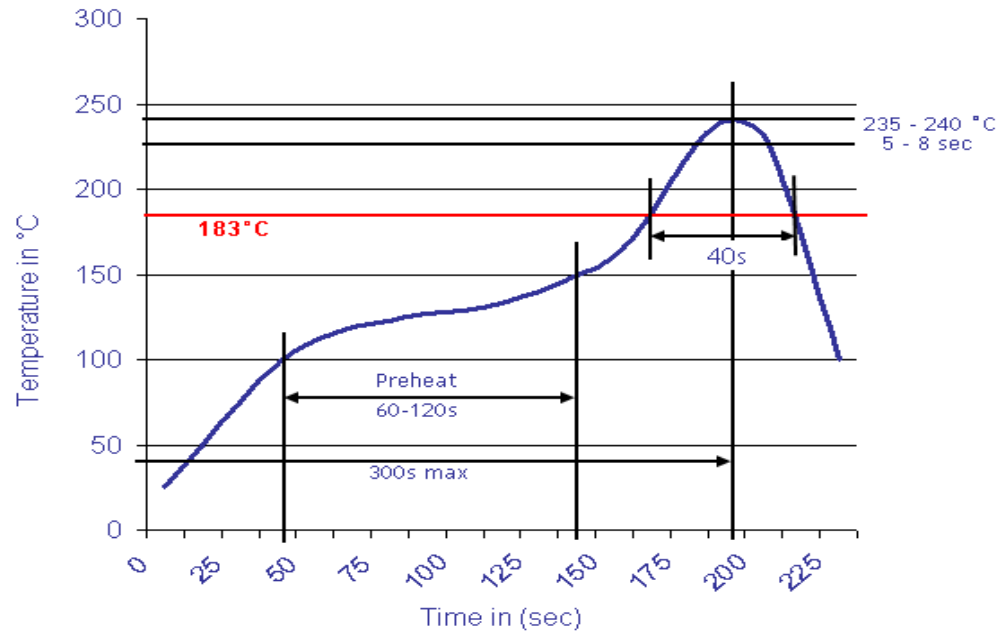

Screwless Terminal Block

Pitch 2.50mm

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	24.09.2009	Part No.:	A11E010
APPD:	Schumi			FINISH	Jamy			Sheet No.	3 from 3	Customer:	

www.edcon-components.com

email: info@edcon-components.com

