




EDCON-COMPONENTS



Drawing

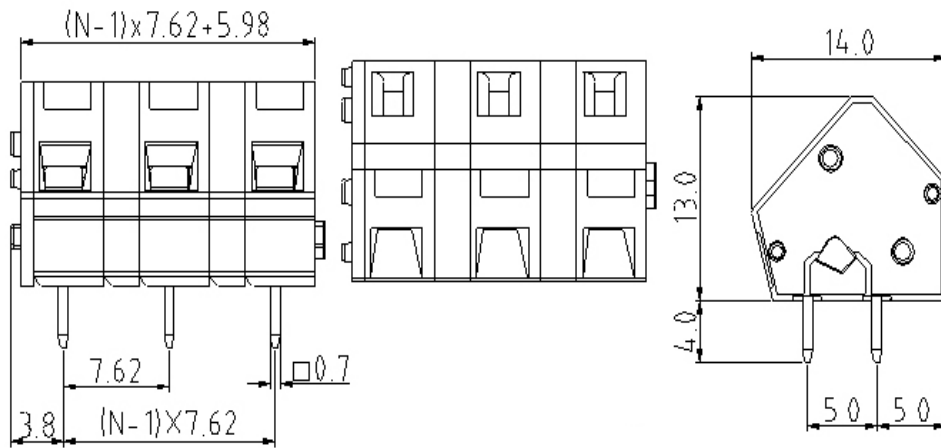

P.C.B. Layout

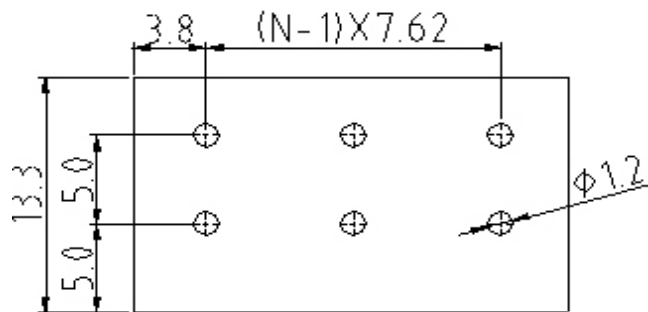

Specifications

APPROVAL



Electrical

Standard	cULus
Rated voltage	300V
Rated current	15A
Withstanding voltage	1.6KV
Solid wire	28-18 AWG
Stranded wire	28-18 AWG

Mechanical

Wire strip length	6 ~ 7mm
Ambient temperature	-40°C ~ +115°C
Soldering temperature	250°C ±10°C/5 sec

Dimensions

Pitch	7.62mm
Poles	2P - 12P

Material

Housing	Thermoplastic (UL94V-0)
Pin header	Brass, Tin plated
Wire guard	Stainless steel



Certification



Screwless Terminal Block /

Pitch 7.62mm


Part No.: **A11R003**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.07.2009
APPD:	Schumi			FINISH	Jamy			Sheet No.	1 from 3

Customer:

email: info@edcon-components.com

www.edcon-components.com



Ordering Informations

Serie	-	No. of Pole	Body-Color	-	Customer Request
A11R003	-	XX	XX	-	X

XX = total	WH - white
02	GN - green
...	GR - gray
12	PG - Phoenix Green
	OR - orange
	BK - black
	BL - blue
	LG - light gray




Certification




Screwless Terminal Block / Pitch 7.62mm
Part No.: A11R003
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.07.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 3



Soldering - Profil

Classification Reflow Profile (JEDEC J-STD-020C)

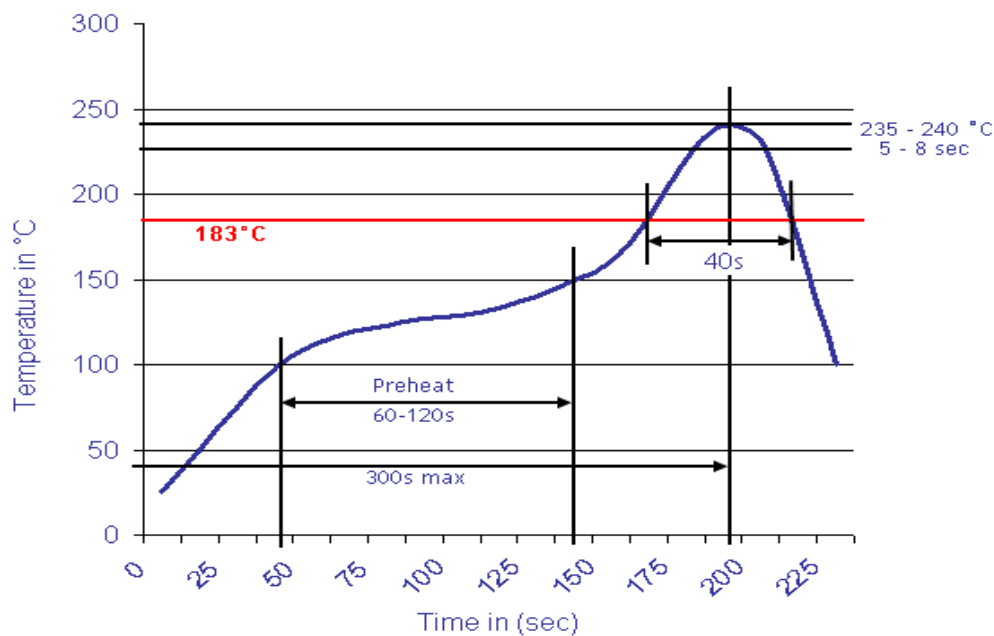

Screwless Terminal Block /

Pitch 7.62mm

Part No.: **A11R003**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.07.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	

Customer:

email: info@edcon-components.com