



EDCON-COMPONENTS



Drawing

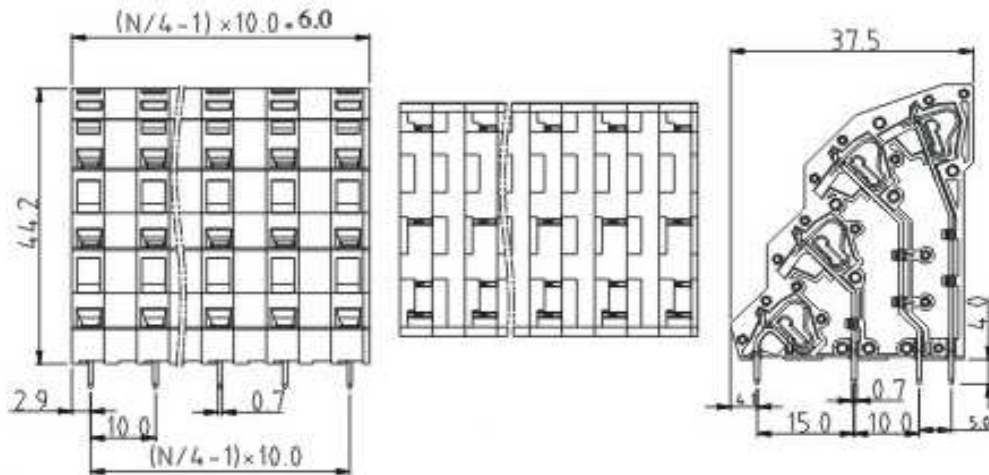

P.C.B. Layout

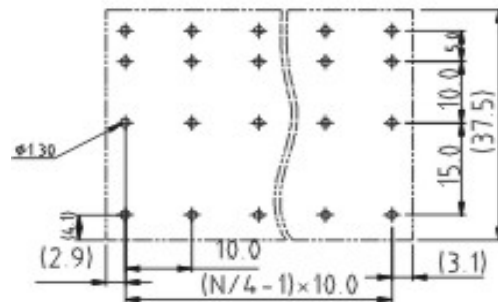

Specifications

APPLYING APPROVAL

Electrical

Standard	(cULus) pending
Rated voltage	cULus
Rated current	300V
Withstanding voltage	10A
Wire range	1.6KV
Solid / Stranded wire	28-12 AWG

Mechanical

Wire strip length	5 ~ 6mm
Ambient temperature	-40°C ~ +115°C
Soldering temperature	250°C ±10°C/5 sec

Dimensions

Pitch	10.00mm
Poles	4x (2P - 16P)

Material

Housing	Thermoplastic (UL94V-0)
Pin header	Brass, Tin plated
Wire guard	Stainless steel



Certification



Screwless Terminal Block /

Pitch 10.00mm

Part No.: **A11T025**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.07.2009	Customer:
APPD:	Schumi			FINISH	Jamy			Sheet No.	1 from 3	

www.edcon-components.com

email: info@edcon-components.com



Ordering Informations

Serie	-	No. of Pole	Body-Color	-	Customer Request
A11T025	-	XX	XX	-	X

XX = total	WH - white
02	GN - green
...	GR - gray
16	PG - Phoenix Green
	OR - orange
	BK - black
	BL - blue
	LG - light gray



Certification



Screwless Terminal Block /
Pitch 10.00mm


Part No.: **A11T025**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.07.2009	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 3		



Soldering - Profil

Classification Reflow Profile (JEDEC J-STD-020C)

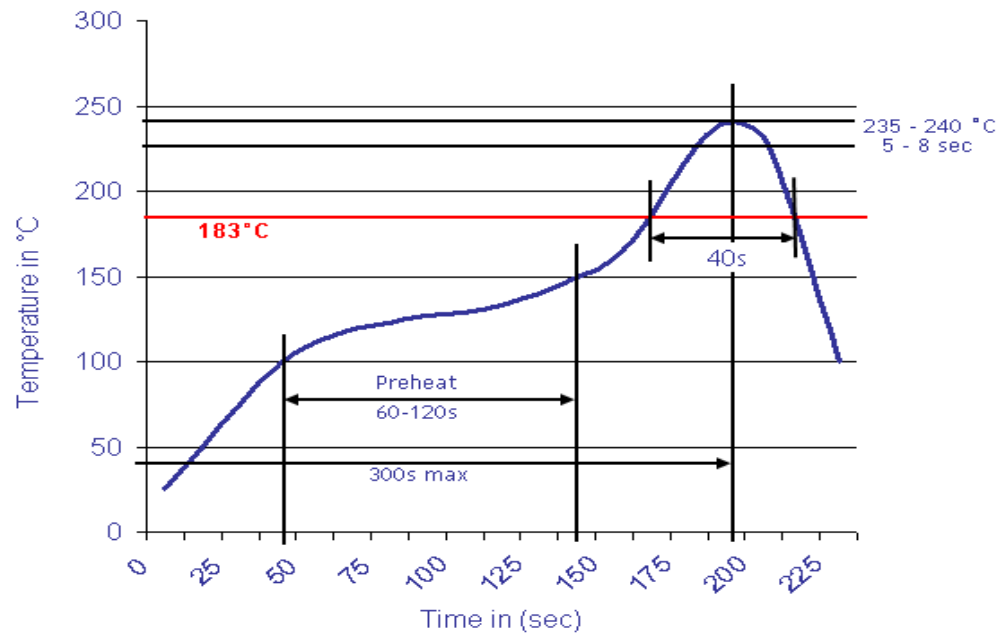

Screwless Terminal Block /

Pitch 10.00mm

Part No.: **A11T025**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.07.2009	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3		