



EDCON-COMPONENTS



Drawing

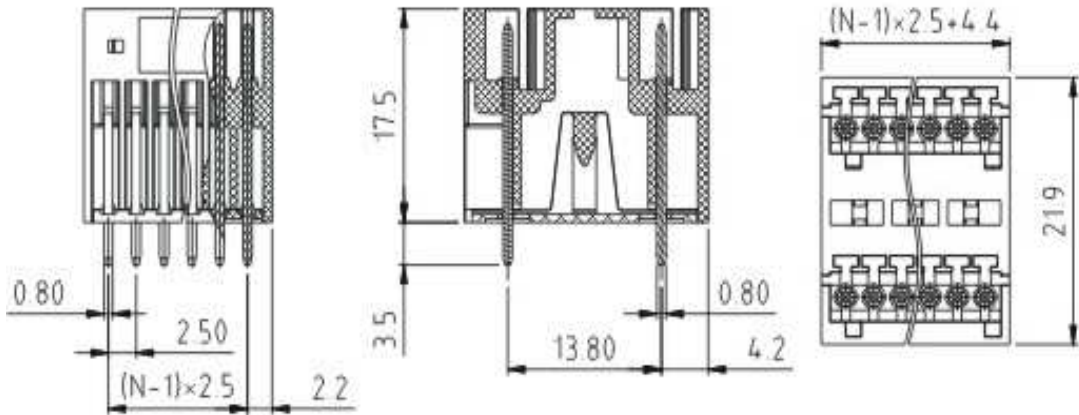

P.C.B. Layout

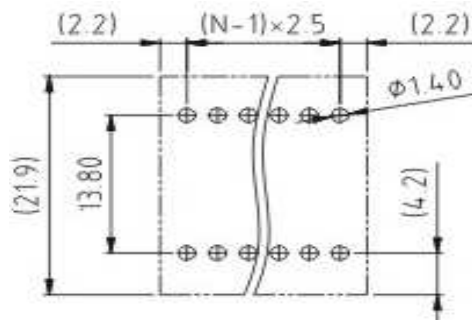

Specification

APPROVAL

Electrical

Standard
Rated voltage
Rated current
Withstanding voltage



cULus
150V
4A
1.3KV

Mechanical

Ambient temperature
Soldering temperature

-40°C ~ +115°C
250°C ±10°C / 5sec.

Dimensions

Pitch
Poles

2.50mm
2P - 24P

Material

Housing
Pin header

Thermoplastic (UL94V-0)
Brass, Tin plated



Certification



Pluggable Terminal Block /
Pitch 2.50mm

Part No.: A14E003

Customer:

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.10.2009
APPD:	Pete			FINISH	Mike			Sheet No.	1 from 3

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	-	No. of Pole	Body-Color	-	Customer Request
A14E003	-	XX	XX	-	X
		XX = total	WH - white		
		02	GN - green		
		...	GR - gray		
		24	PG - Phoenix Green		
			OR - orange		
			BK - black		
			BL - blue		
			LG - light gray		



Certification



Pluggable Terminal Block /

Pitch 2.50mm

Part No.: A14E003

Customer:

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.10.2009
APPD:	Pete			FINISH	Mike			Sheet No.	2 from 3


www.edcon-components.com

email: info@edcon-components.com



Soldering - Profil

Classification Reflow Profile (JEDEC J-STD-020C)

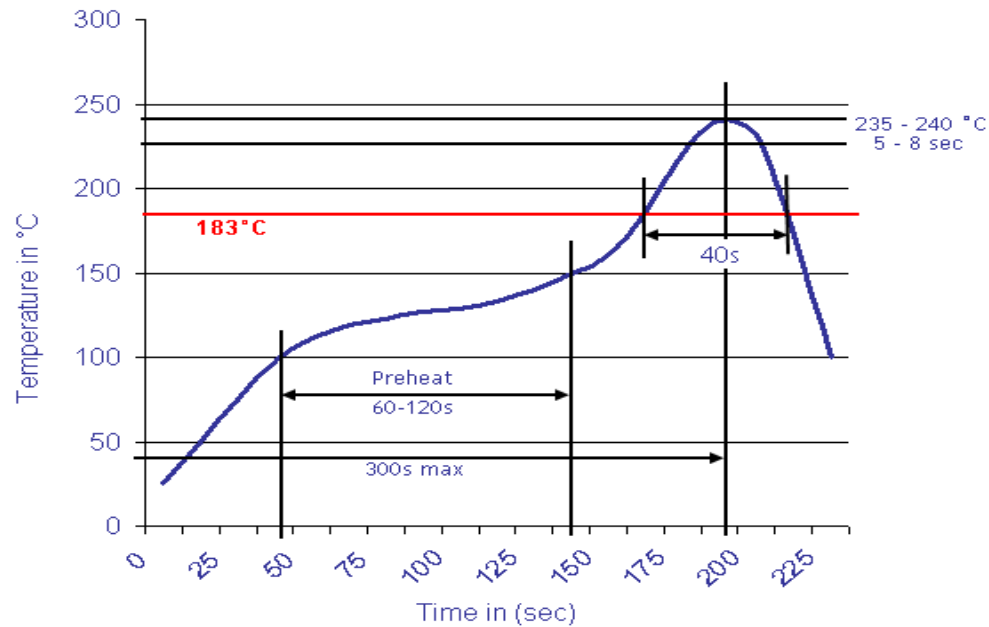

Pluggable Terminal Block / Pitch 2.50mm	
Part No.:	A14E003
Customer:	

DRW:	Justin	CHKD:	Frank	MATL:	Jordan	TOLERANCE:	Lord	Date:	10.10.2009
APPD:	Pete	FINISH:	Mike				Sheet No.:	3 from 3	