



EDCON-COMPONENTS




Specifications

Voltage Rating:	125V AC,DC
Current Rating	1A AC/DC
Operating Temperature	. -25°C ~ + 85°C
Contact Resistance	20 milli Ohm max.
Withstanding Voltage	500V AC/minute
Insulation Resistance	500 M Ohm min.
Material Pin:	Phosphor Bronze
Contact Plating:	Tin plated / Gold Flash Plated



Drawing (dimensions all into mm)

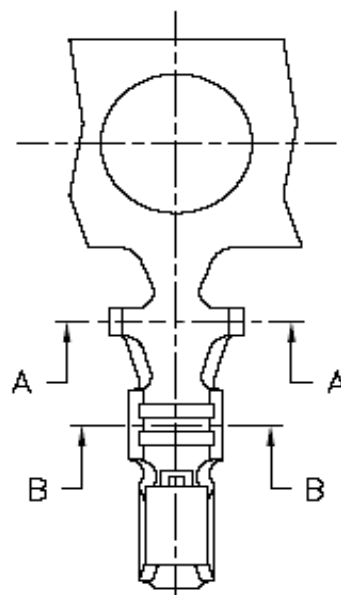

SEC:A-A



SEC:B-B

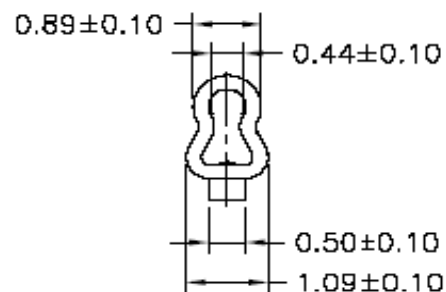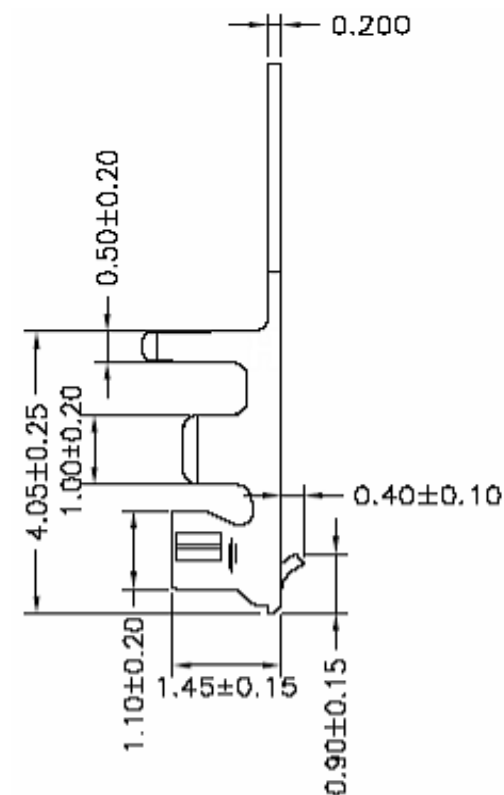


**Terminal T68Kxxx Pitch
1,25mm**

Part No.: **T68K011**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 2	

EDCON-COMPONENTS

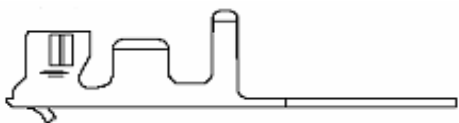

Ordering Informations

Serie	Contact	Wire Size	Packing						
T68K011	T	32	TR153						

T= Tin	32 = AWG 26~ 32	TR153= Tape/Reel 15000PCS							
G= Flash Gold									

Terminal T68Kxxx Pitch 1,25mm	
Part No.:	T68K011
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 2	

www.edcon-components.com

email: info@edcon-components.com