


# EDCON-COMPONENTS



## Specifications

Voltage Rating:	50V AC,DC
Current Rating	1A AC/DC
Operating Temperature	. -25°C ~ + 85°C
Contact Resistance	20 milli Ohm max.
Withstanding Voltage	500V AC/minute
Insulation Resistance	500 M Ohm min.
Material Pin:	Phosphor Bronze
Contact Material:	Phosphor Bronze
Contact Plating:	Gold Flash

## Drawing ( dimensions all into mm)

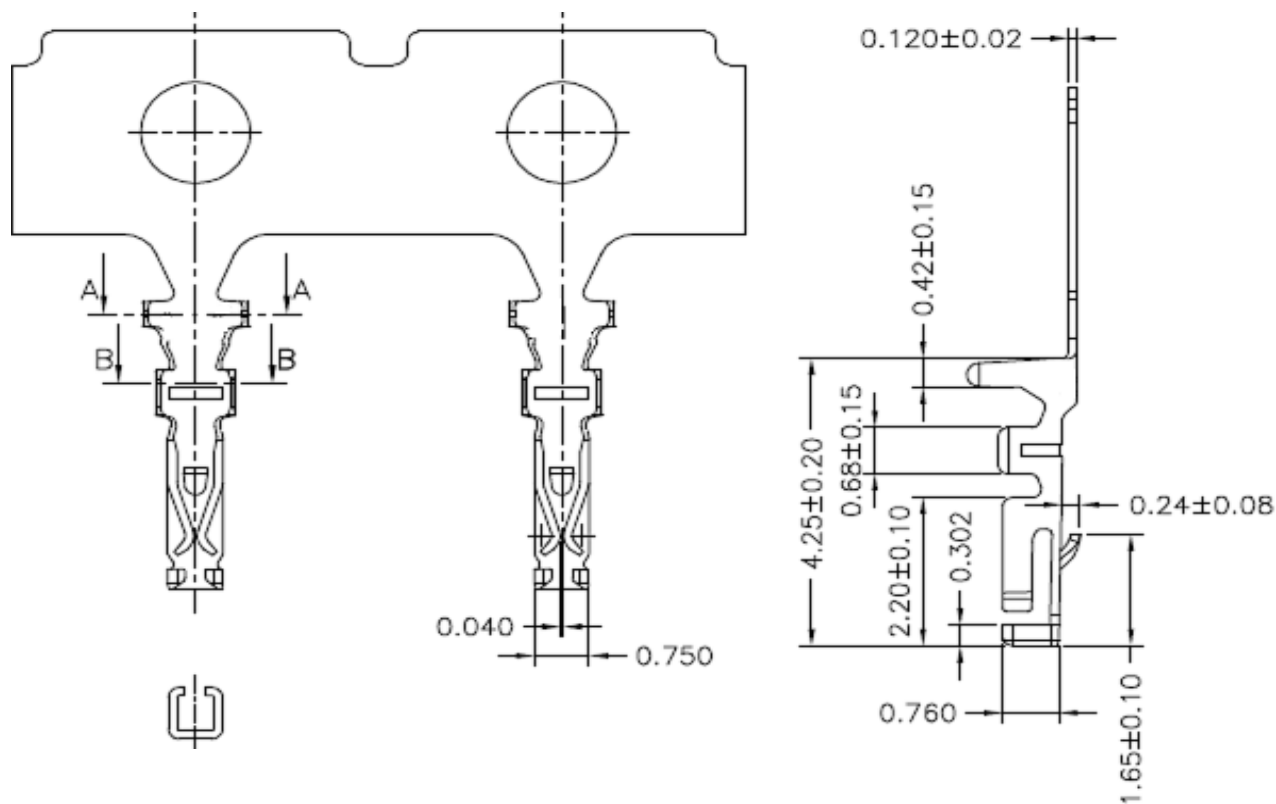

**Terminal T68Lxxx Pitch  
1,00mm**

Part No.: **T68L029**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 2

[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)

# EDCON-COMPONENTS



## Ordering Informations

Serie	C- Material	Wire Size	Packing						
<b>T68L029</b>	<b>PB</b>	<b>32</b>	<b>TR153</b>						

<b>PB=</b> Phosphor Bronze	<b>32 = AWG</b> 28~ 32	<b>TR153=</b> Tape/Reel 15000PCS
----------------------------------	---------------------------	--

<b>Terminal T68Lxxx Pitch 1,00mm</b>
Part No.: <b>T68L029</b>
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 2	

[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)